


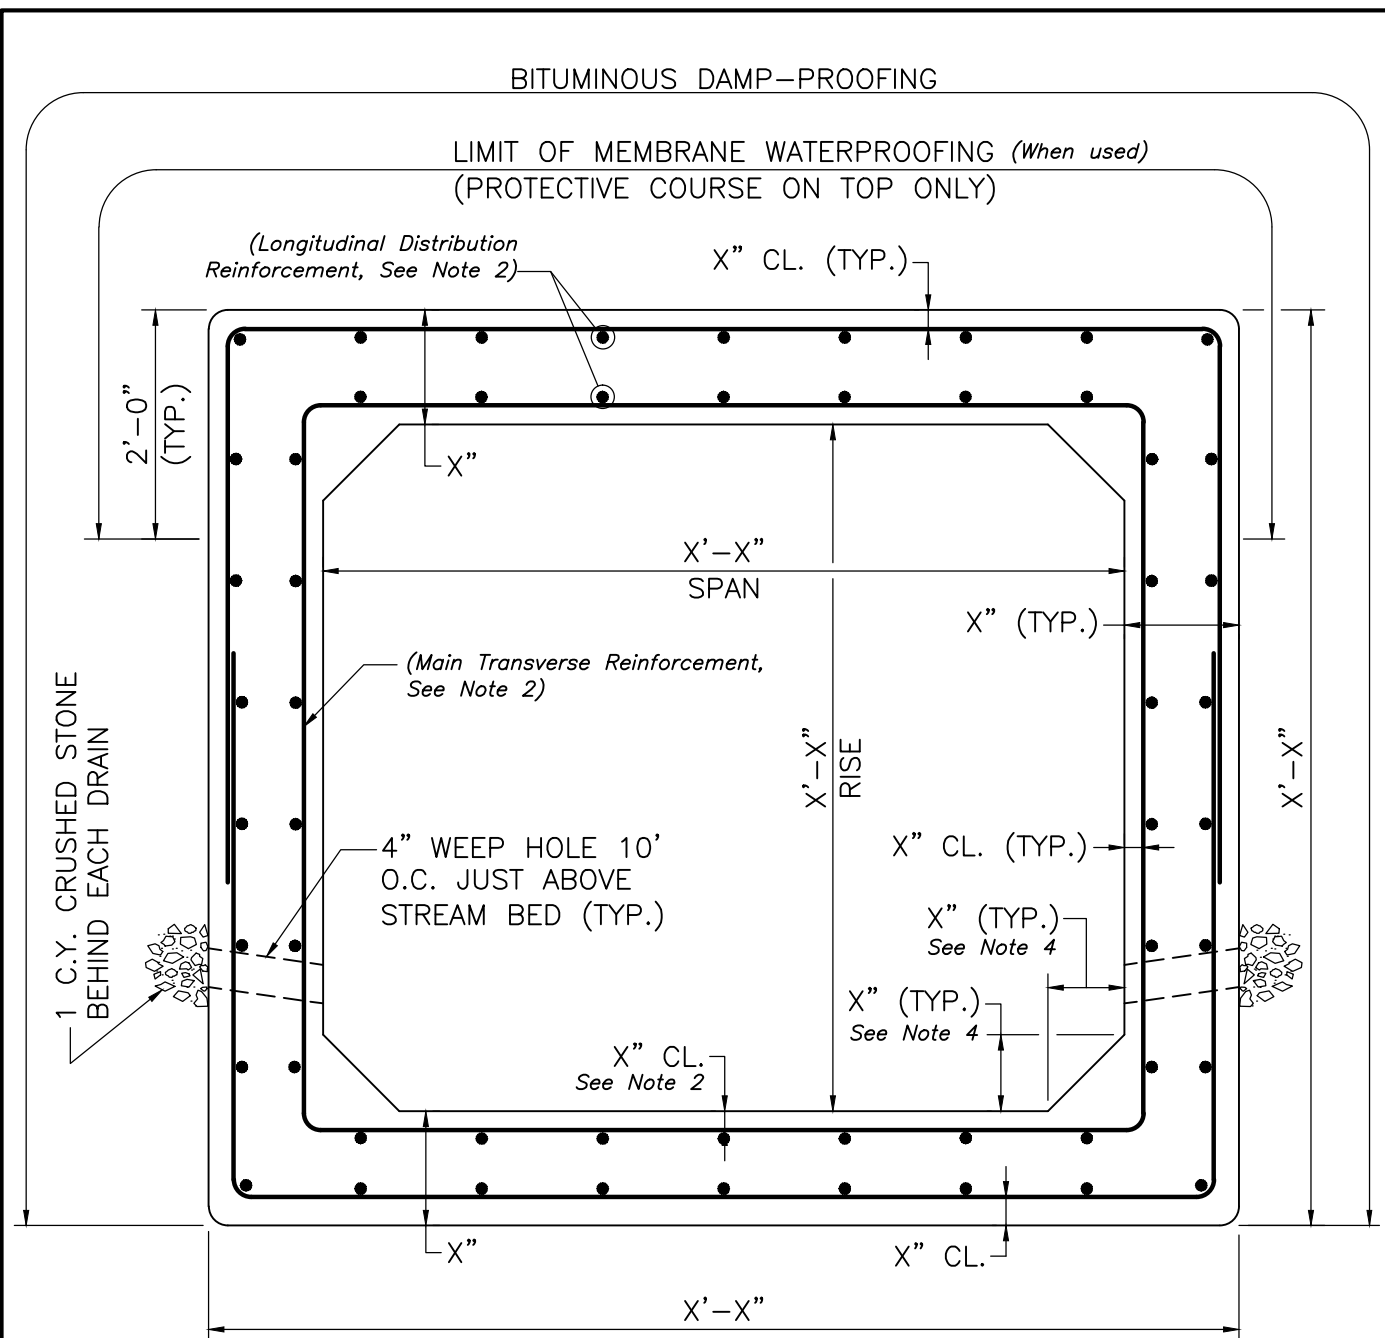

NOTES:

1. MAXIMUM BEARING PRESSURE = XXX KSF.
2. TRANSVERSE REINFORCING SHALL BE PLACED NORMAL TO THE ϕ OF THE CULVERT.

SECTION THRU BARREL

SCALE: $\frac{3}{4}'' = 1'-0''$

NOTE:

For Designer Notes see Dwg. No. 11.3.2



LRFD BRIDGE
MANUAL, PART II

TYPICAL SECTION

CONCRETE BOX CULVERT DETAILS

DATE OF ISSUE
JUNE 2013

DRAWING NUMBER

11.3.1