


NOTE:

The Designer shall follow provisions of Paragraph 3.3.1.7 of Chapter 3 of Part I of this Bridge Manual for evaluating pier protection requirements from vehicular impact.

SUBSTRUCTURE WITHIN STANDARD RECOVERY AREA

SCALE: $\frac{3}{32}" = 1'-0"$

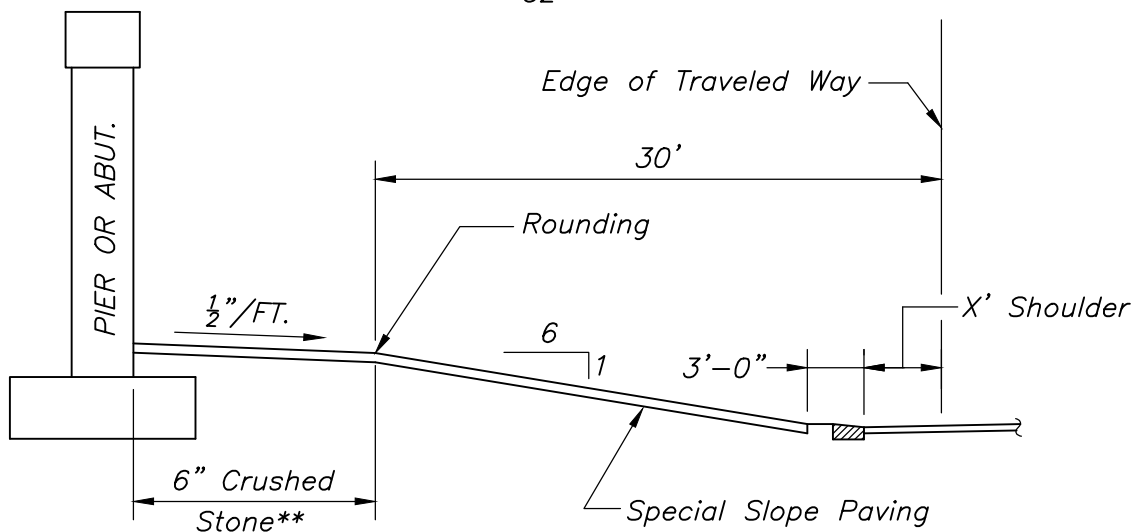

SUBSTRUCTURE OUTSIDE OF STANDARD RECOVERY AREA

SCALE: $\frac{3}{32}" = 1'-0"$

NOTES:

1. ** 4" Cement Concrete over 6" Gravel is to be substituted for the above in urban areas and locations that may be accessible to pedestrians.
2. Show all dimensions on Sketch Plans and Construction Drawings.



LRFD BRIDGE
MANUAL, PART II

LIMITED ACCESS HIGHWAY
(VARIOUS RECOVERY AREAS)
CLEARANCES UNDER BRIDGE

DATE OF ISSUE
JUNE 2013

DRAWING NUMBER

2.1.2