

VERTICAL SECTION THRU CONSTRUCTION JOINT


ABUTMENT DETAILS

DATE OF ISSUE


JUNE 2013

DRAWING NUMBER

3.1.8

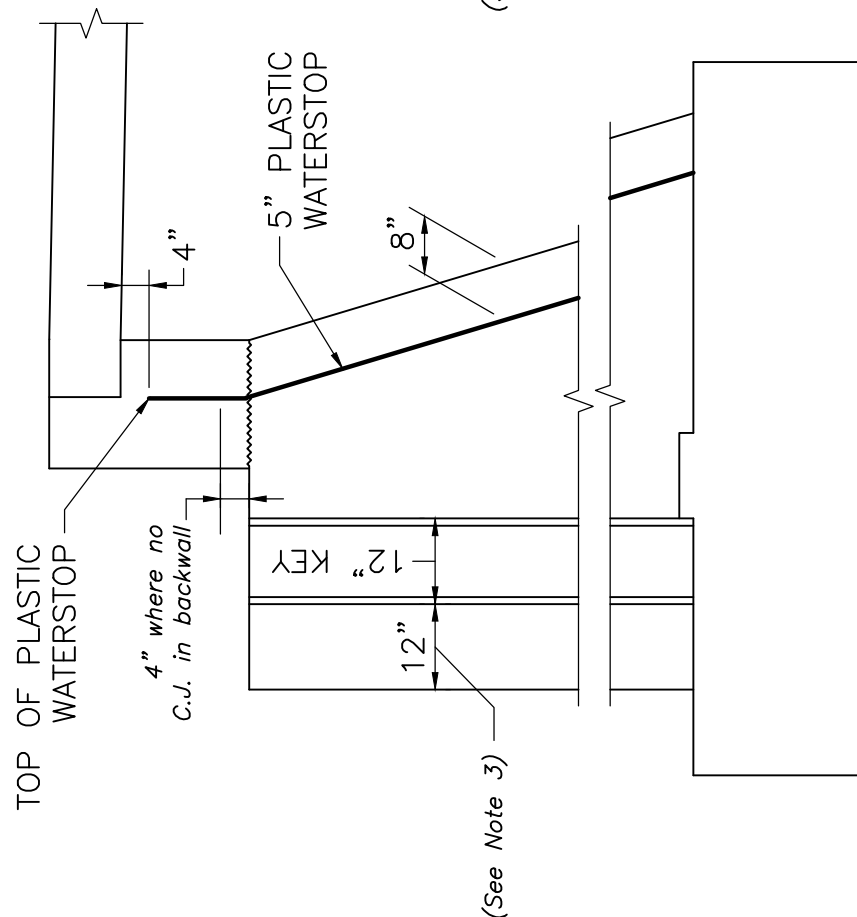

GRAVITY ABUTMENT

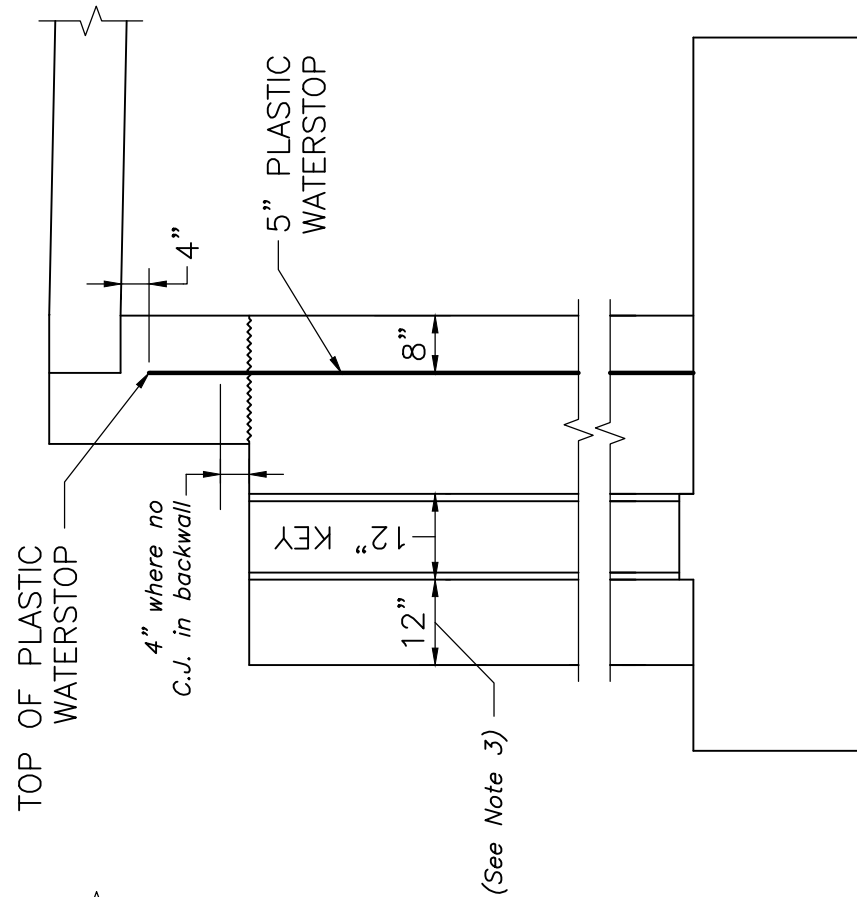

CANTILEVER ABUTMENT

NOTE:

REINFORCEMENT SHALL BE CONTINUOUS THRU CONSTRUCTION JOINTS.

VERTICAL SECTION THRU CONSTRUCTION JOINT

SCALE: $\frac{1}{2}$ " = 1'-0"

NOTES:

1. Construction joints shall be located at intervals of not more than 24'.
2. Locate construction joints by dimensions on Construction Drawings.
3. If 12" clearance cannot be achieved by placing end of 12" key at face of backwall, place key farther back to achieve the 12" clearance.