


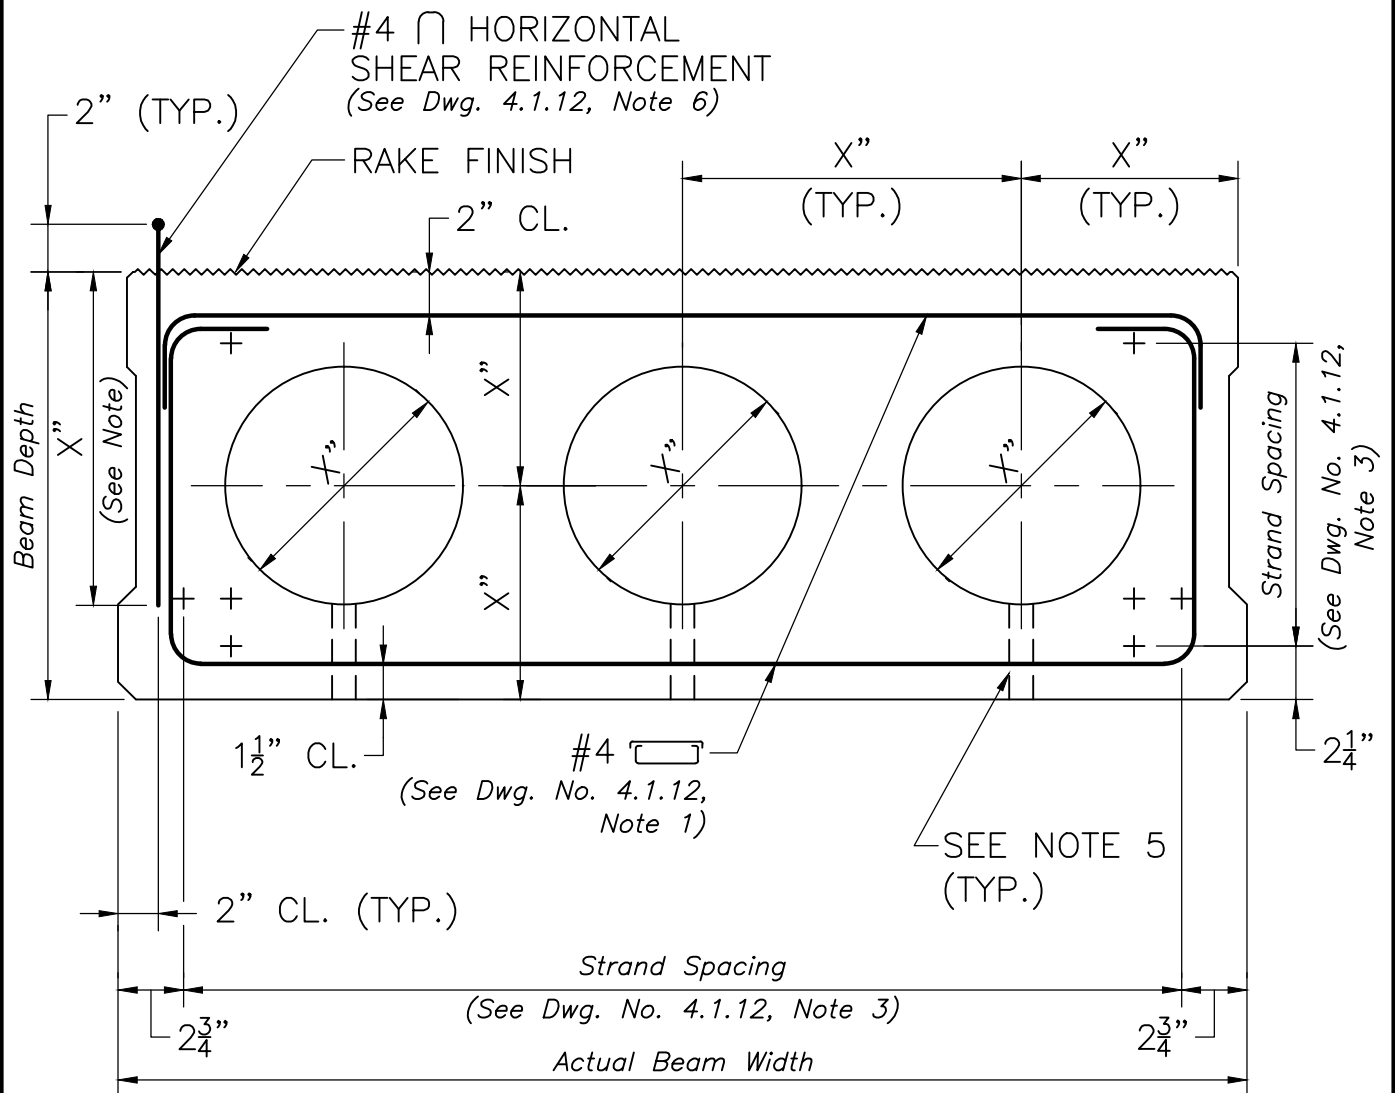

NOTES:

1. + DENOTES STRAIGHT STRANDS.
2. ⊕ DENOTES DEBONDED STRANDS. (None Shown Above)
3. SEE SHEAR KEY DETAIL ON SHEET (Provide Reference).
4. SEE END OF BEAM PLAN FOR STIRRUP SPACING.
5. 1" ∅ DRAIN, PLACED AT BOTH ENDS OF EACH VOID.

NOTE:

Specify 10" for 12" deep beams, 12" for 15" deep beams, and 14" for 18" and 21" deep beams.



LRFD BRIDGE
MANUAL, PART II

TYPICAL MIDSPAN SECTION

PRECAST CONCRETE DECK BEAMS

DATE OF ISSUE
JUNE 2013

DRAWING NUMBER

4.1.9