

Bedrock Water Quality Map


DEDHAM

Uranium Probability

This map is intended to compliment the USGS Scientific Investigations Report 2011-5013, Arsenic and Uranium in Water from Private Wells Completed in Bedrock of East-Central Massachusetts: Concentrations, Correlations with Bedrock Units, and Estimated Probability Maps. That report presents the results of a statistical study of bedrock water quality based primarily on 478 samples from private wells. This is a relatively small number of samples for such a large and diverse study area. The confidence intervals around probabilities used here are broad. Users are urged to carefully read the original report.

The geologic map underlying this work is at a scale of 1:250,000 or about 4 miles per inch. Although presented on a two dimensional map, bedrock geology is a three dimensional phenomenon. Contact zones almost never go straight down. Because this town map is at a much larger scale than the original, the necessity of presenting 3D geology in only two dimensions, and the wide confidence intervals in the statistical analysis, users should interpret this map as a general indicator of expected water quality. The only way to be sure of the quality of water in any given well is to have that water tested.

% Probability of Exceeding the
Public Drinking Water Standard
of 30 Micrograms per liter (30 PPB)

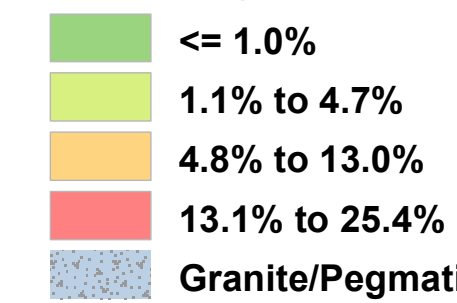


City/Town Statistics


Acres	Percent
0	0
0	0
0	0
0	0
6389.4	93.5
No Data	443.4
Total	6832.8

* Areas mapped as granite and pegmatite are located outside of the USGS SIR 2011-5013 study area. Although no precise uranium probability values exist for these bedrock units, these types of bedrock generally have an increased probability of containing naturally occurring radionuclides such as radium, uranium, or radon in well water at concentrations exceeding public drinking water limits.

MAP LEGEND

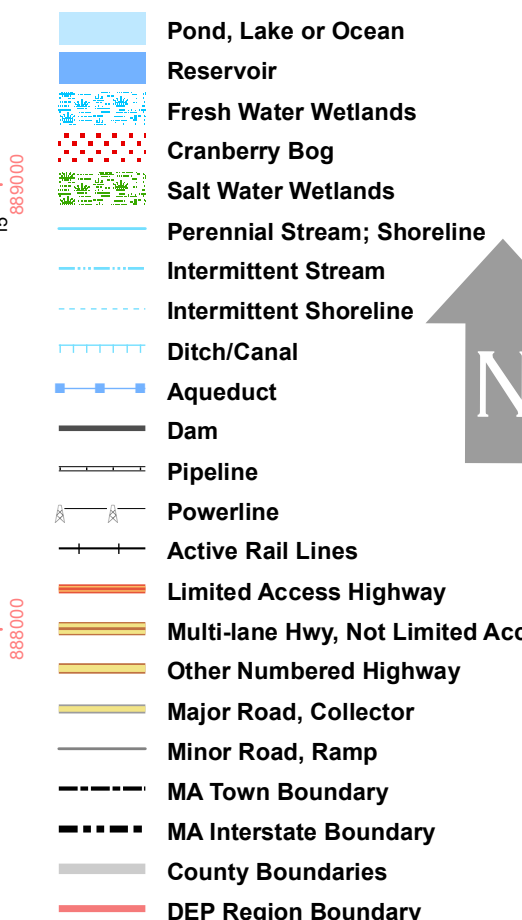


Cultural Features

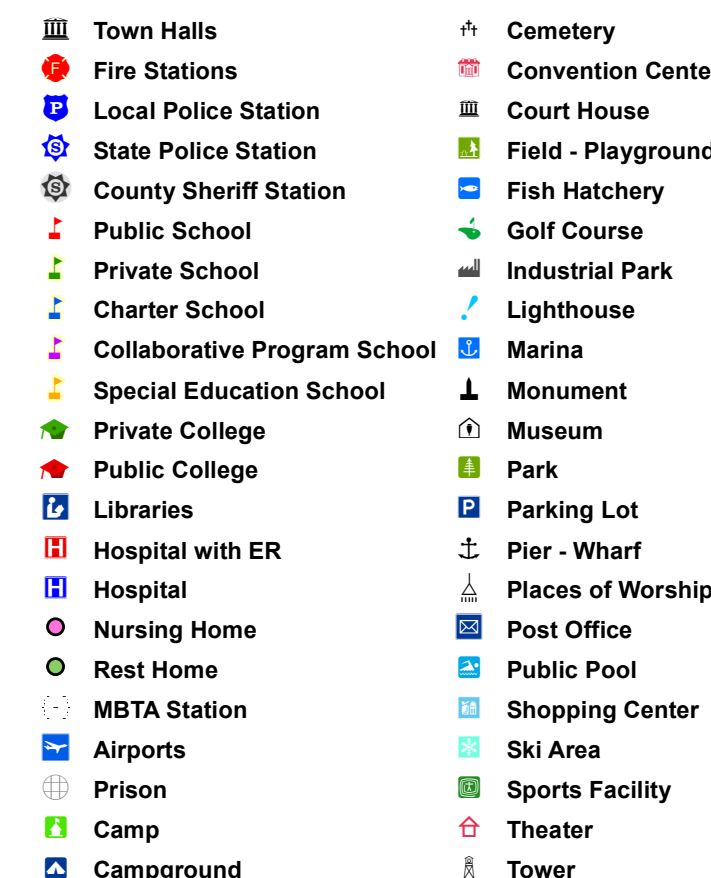


Contour Interval 3 Meters

Mass StatePlane NAD83 Coordinates shown in RED

DEDHAM
FALLS WITHIN THE
MassDEP NORTHEAST Region

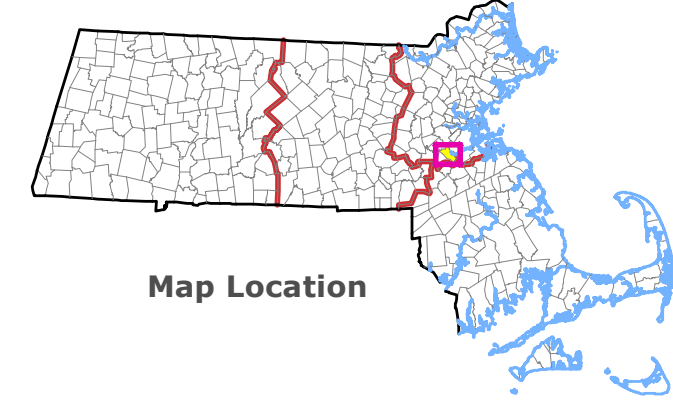

Map Scale 1:17000

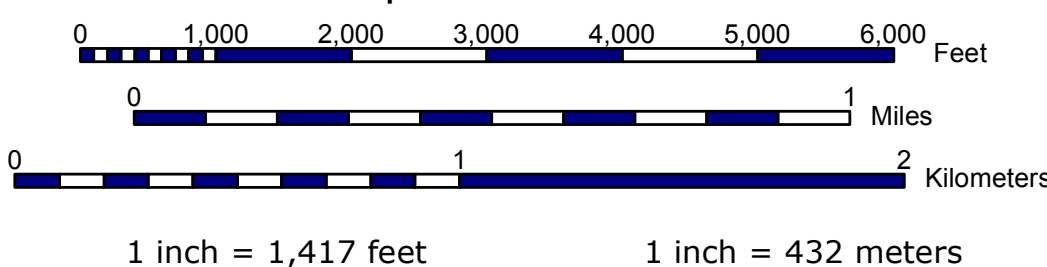

DATA SOURCES

TOPOGRAPHIC CONTOURS: MassGIS, 1:5,000, 3 meter contour elevations, generated from digital ortho DTMs.
WETLANDS: USACE Resource Mapping Project (RMP)/USGS/NA
DEP/MassGIS, Source Scale 1:12,000 to 1:40,000. Wetland information shown on this map consists of several wetlands datasets, including DEP Orthophoto Wetlands (1:12,000) and USGS Hydrology Wetlands (1:25,000).
GEOGRAPHIC FEATURES: USGS/MassDEP USGS Geographic Names Information System (GNIS) features matched to parcel data or orthophoto. Hydrography names taken from USGS NFD features and placed using MapInfo.

HYDROGRAPHY: USGS/MassGIS, 1:25,000 or less. Hydrography from the USGS National Hydrography Database except within public water supply watersheds where the resolution is approximately 1:10,000.
POLITICAL BOUNDARIES: MassGIS. The political boundary data layer has been created from latitude and longitude coordinates found in the 68 volume harbor and Land Commission Town Boundary Atlas (1:25,000).
ROADS: Mass Department of Transportation 1:5000. Road centerlines aligned with 1:5000 Orthophotos. Attributes from DOT roads database.
TRAINS AND TRANSLINES: Mass Department of Transportation
Trains @ 1:5000, Pipelines and Powerlines @ 1:25000

This map is for illustrative purposes only. It represents the best statewide data available at the date of printing. There are other important natural resources that are not shown on this map because the digital spatial data do not exist.

G:\Arcgis\Map Documents\Map Series\PLTS\Potential_Towns_UR(L).mxd