

Chevrolet Volt
5 Door Hatchback
2016

First Responder
Rescue Sheet





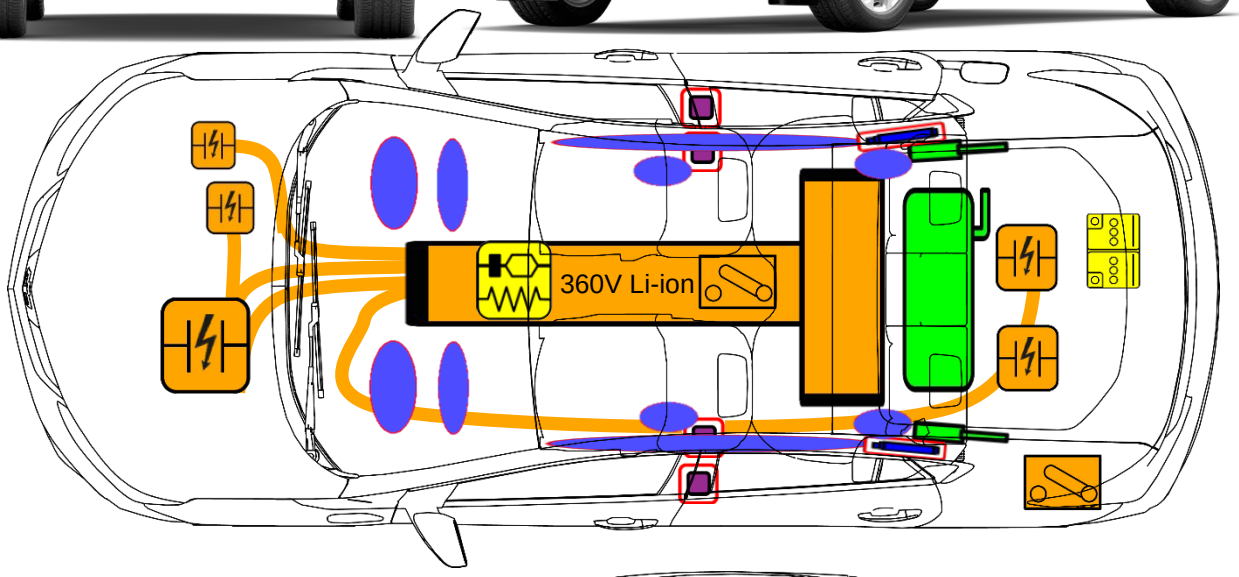

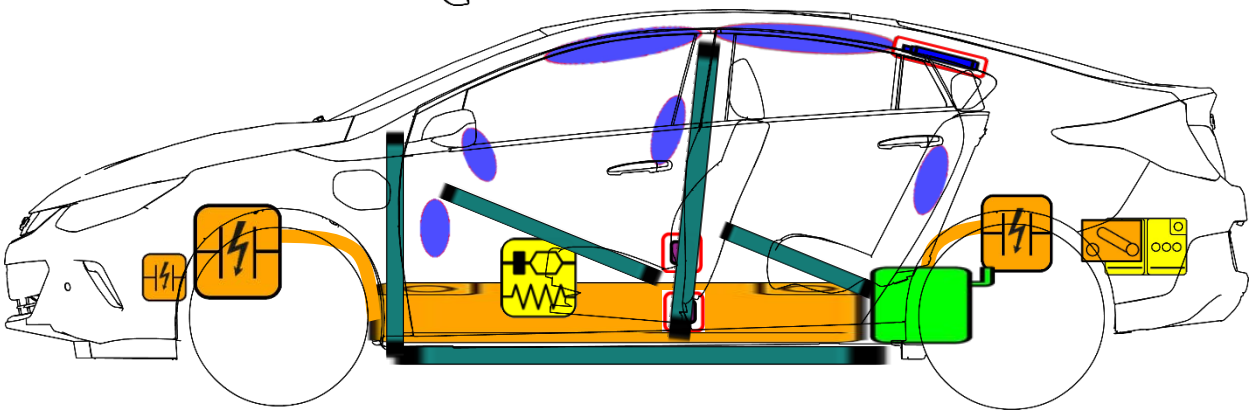

	Air Bag		Stored Gas Inflator		Seat Belt Pretensioner		SRS Control Unit		
			Gas Strut/ Preloaded Spring		High Strength Zone				
	Battery Low Voltage				Fuel Tank				
	High Voltage Battery Pack		High Voltage Power Cable		High Voltage Disconnect				Ultra Capacitor, High Voltage

RSN - 1G1-201601 (V03)


Chevrolet Volt
5 Door Hatchback
2016

First Responder
Rescue Sheet

The Chevrolet Volt Extended Range Electric Vehicle (EREV) technology incorporates a low voltage battery that must be disconnected prior to occupant extrication.

To Disable the Vehicle:

1. Turn the ignition to “OFF” and remove the keys from the vehicle.
2. Double cut all positive 12 volt cables connected at the yellow tape located behind the storage cover panel on the left side of the rear compartment.

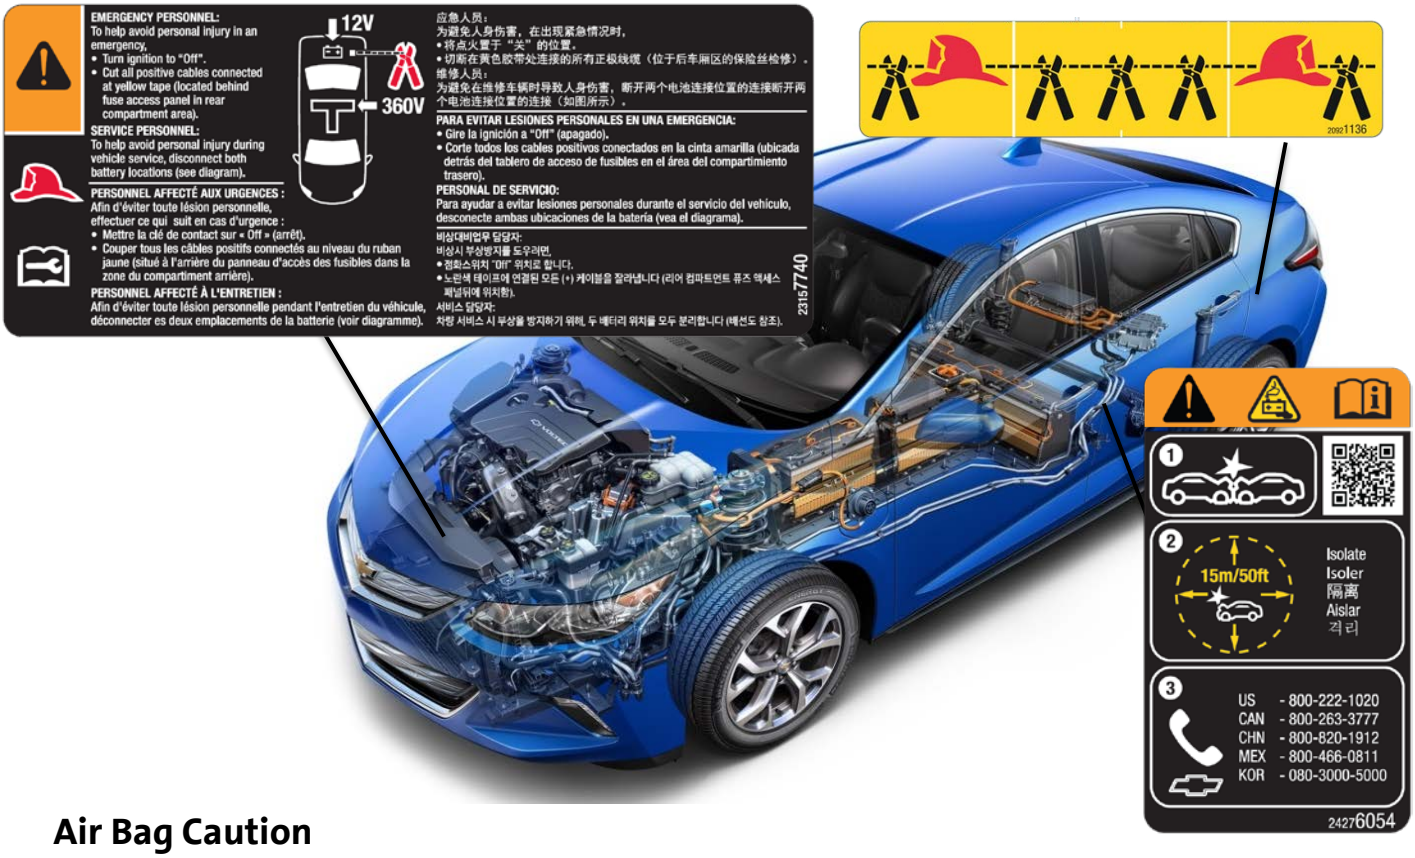

Air Bag Caution

After disabling 12 volt power, wait at least 10 seconds to allow any un-deployed airbag reserve energy to dissipate.

In Case of Fire

A battery on fire will not explode. If battery cells reach high enough temperature, they vent and release electrolyte. Battery electrolyte is flammable. Use copious amounts of water to cool the battery to extinguish the fire. Do not use an ABC dry chemical extinguisher because it will not extinguish a battery fire.

In Case of Water Immersion

The high voltage battery is sealed and isolated from the vehicle chassis. If the vehicle is immersed in water, you will not be electrocuted by touching the vehicle.