

Commonwealth of Massachusetts Executive Office of Energy & Environmental Affairs

Department of Environmental Protection

100 Cambridge Street Suite 900 Boston, MA 02114 • 617-292-5500

Maura T. Healey Governor

Kimberley Driscoll Lieutenant Governor Rebecca L. Tepper Secretary

> Bonnie Heiple Commissioner

MCP REPRESENTATIVENESS EVALUATIONS AND DATA USABILITY ASSESSMENTS

Policy #WSC-25-350

This policy provides guidance on conducting Representativeness Evaluations and Data Usability Assessments under the Massachusetts Contingency Plan (MCP).

The information contained in this document is intended solely as guidance. This document does not create any substantive or procedural rights, and is not enforceable by any party in any administrative or other proceeding with the Commonwealth. Parties using this guidance should be aware that there may be other acceptable alternatives for achieving and documenting compliance with the applicable regulatory requirements and performance standards of the MCP.

10/10/2025	Mille Garcia-Jerra
Date	Millie Garcia-Serrano

Assistant Commissioner
Bureau of Waste Site Cleanup

TABLE OF CONTENTS								
Section		Page						
1.0	Introduction	2						
2.0	Definitions	2						
3.0	Regulatory Background	2						
4.0	Applicability	4						
5.0	Permanent and Temporary Solution Requirements	4						
6.0	Representativeness Evaluation	7						
6.1	Conceptual Site Model	7						
6.2	Use of Field/Screening Data	8						
6.3	Sampling Rationale	8						
6.4	Number, Spatial Distribution and Handling of Samples	9						
6.5	Temporal Distribution of Samples	9						
6.6	Completeness	9						
Section 1.0		9						
6.8	Information Considered Unrepresentative	9						
7.0	Data Usability Assessment	10						
7.1	Analytical Data Usability Assessments	10						
7.1.1	Evaluation for CAM Compliant Data	10						
7.1.2		10						
7.1.3	Data Evaluation Criteria	12						
7.2	Field Data Usability Assessment	12						
7.3	-	13						
8.0	Conclusions	13						
	Documentation	13						
Figures								
_		6						
Table 1		5						
6.5 Temporal Distribution of Samples 6.6 Completeness 9 6.7 Inconsistency and Uncertainty 9 6.8 Information Considered Unrepresentative 7.0 Data Usability Assessment 10 7.1 Analytical Data Usability Assessments 10 7.1.1 Evaluation for CAM Compliant Data 10 7.1.2 Evaluation for CAM Non-Compliant, Non-CAM and Pre-CAM Data 7.1.3 Data Evaluation Criteria 12 7.2 Field Data Usability Assessment 12 7.3 Rejection of Analytical Data as the Result of Gross Failure 13 8.0 Conclusions 13 9.0 Documentation 13 Figures Figure 1 Representativeness Evaluation and Data Usability Assessment Process Diagram Representativeness Evaluation and Data Usability Assessment Process Diagram 7able 3 Analytical Data Usability Considerations for Different Data Categories Appendices Appendix II Elements for Evaluating the Accuracy, Precision and Sensitivity of 17								
Table 3	· · · · · · · · · · · · · · · · · · ·	13						
Appendix I	· · · · · · · · · · · · · · · · · · ·	15						
Appendix II		17						
Appendix III	Use of PARCCS Parameters for MCP Data Usability Assessment	19						
Appendix IV	Rejection Criteria – Analytical Data Usability Assessments	20						
Appendix V	Representativeness and Data Usability Worksheet	22						
Appendix VI	Data Summary Table	26						

MCP Representativeness Evaluations and Data Usability Assessments Policy #WSC-25-350

1.0 Introduction

This guidance may be used to prepare Representativeness Evaluations and Data Usability Assessments required as part of Permanent and Temporary Solution submittals made pursuant to 310 CMR 40.1056(2)(k) and 40.1057(2)(k) of the Massachusetts Contingency Plan (MCP). This document provides general information regarding the purpose and content of these evaluations as a component of and in support of Permanent and Temporary Solution submittals.

The information contained in this document is intended solely as guidance. This document does not create any substantive or procedural rights, and is not enforceable by any party in any administrative or other proceeding with the Commonwealth. Parties using this guidance should be aware that there may be other acceptable alternatives for achieving and documenting compliance with the applicable regulatory requirements and performance standards of the MCP.

2.0 Definitions

Key terms that appear in capital letters in this document that are not otherwise defined in the MCP are defined in **Appendix I**.

3.0 Regulatory Background

The requirement to provide a Representativeness Evaluation and Data Usability Assessment in the documentation that supports Permanent and Temporary Solution submittals is contained in the MCP at 310 CMR 40.1056(2)(k) and 40.1057(2)(k) and cited below:

40.1056: Content of Permanent Solution Statements

...

(2) Except as provided in 310 CMR 40.1056(4), all documentation, plans and/or reports necessary to support the Permanent Solution shall be submitted to the Department with the Permanent Solution Statement including, without limitation, the following:

...

(k) a Data Usability Assessment documenting that the data relied upon is scientifically valid and defensible, and of a sufficient level of precision, accuracy, and completeness to support the Permanent Solution, and a Data Representativeness Evaluation, documenting the adequacy of the spatial and temporal data sets to support the Permanent Solution

40.1057: Content of Temporary Solution Statements

...

(2) Except as provided in 310 CMR 40.1057(3), all documentation, plans and/or reports necessary to support the Temporary Solution shall be submitted to the Department with the Temporary Solution Statement including, without limitation, the following:

• • •

(k) a Data Usability Assessment documenting that the data relied upon is scientifically valid and defensible, and of a sufficient level of precision, accuracy, and completeness to support the Temporary Solution, and a Data Representativeness Evaluation, documenting the adequacy of the spatial and temporal data sets to support the Temporary Solution

The intent of the MCP requirement to provide a Representativeness Evaluation and Data Usability Assessment as part of Permanent and Temporary Solution submittals is to consolidate and synthesize information **generated and evaluated throughout the response action process** in the documentation that demonstrates achievement of an MCP endpoint (Permanent or Temporary Solution).

Other MCP provisions (310 CMR 40.0017 and 40.0191) define broad performance standards for the acquisition, analysis, and reporting of the analytical and environmental monitoring data used to support MCP response actions. To facilitate the application of these performance standards, MassDEP published a *Compendium of Analytical Methods (CAM)*, a series of recommended protocols for the acquisition, analysis, and reporting of MCP-related analytical data. Parties who elect to use and achieve compliance with the CAM will be assured "Presumptive Certainty" for analytical data provided in support of response action submittals.

Analytical data that achieve "Presumptive Certainty" are data for which the precision, accuracy, and sensitivity have been adequately determined. Depending on the nature and use of other analytical data (CAM Non-Compliant, Non-CAM and Pre-CAM), a separate evaluation may be necessary to establish the level of certainty regarding the quality of the data points and to confirm that the quality of data is sufficient for its use in support of a response action decision. Additional discussion on the use of data other than CAM Compliant data is provided in **Section 7** and **Appendix II.** All analytical data (CAM Compliant, CAM Non-Compliant, Non-CAM and Pre-CAM) must also be evaluated against project-specific objectives to determine whether and to what extent it is usable to support the Permanent or Temporary Solution submittal.

310 CMR 40.1056(1)(k) and 40.1057(1)(j) require that parties conducting response actions indicate whether the analytical data used to support the Permanent or Temporary Solution submittal were generated using MassDEP's CAM. This regulatory requirement is met by providing this information in response to a specific question about use of CAM data on the Permanent or Temporary Solution Statement transmittal form (BWSC-104).

#WSC-25-350 10/10/2025

It is important to note that the broad performance standards (310 CMR 40.0017 and 40.0191) for ensuring the adequacy of analytical and other environmental assessment data are applicable to all MCP response actions. As such, ongoing consideration and evaluation of data usability and representativeness are important and appropriate throughout the response action process. These evaluations inform the development of sampling plans, the identification of goals or Data Quality Objectives for each assessment event, and the development and refinement of the disposal site Conceptual Site Model (CSM).

Note:

The specific requirement to provide a Representativeness Evaluation and Data Usability Assessment in a Permanent or Temporary Solution submittal is not intended to preclude evaluation and discussion of data usability and representativeness as they relate to supporting conclusions in other MCP response action submittals.

Figure 1 outlines the process for conducting a Representativeness Evaluation and Data Usability Assessment to support a Permanent or Temporary Solution submittal. As depicted in Figure 1, the Representativeness Evaluation and Data Usability Assessment should occur contemporaneously and on an ongoing basis. The results of each of these assessments should be used to inform the other. That is, as the analytical and other data become available throughout the course of the site investigation, its quality should be assessed to ensure that the data needed to fully represent disposal site conditions and support response action decisions and conclusions are usable for their intended purpose. The ongoing Representativeness Evaluation will determine whether the site investigation needs to be modified or expanded to test or confirm the CSM and/or obtain additional analytical or other data to achieve a level of information that is sufficiently representative and of sufficient quality to support the Permanent or Temporary Solution submittal.

4.0 Applicability

This guidance is applicable to all Permanent and Temporary Solution Statements.

5.0 Permanent and Temporary Solution Requirements


In documenting that the data used to support a Permanent or Temporary Solution are representative and usable (i.e., meets the requirement at 310 CMR 40.1056(2)(k) and 40.1057(2)(k)), the Representativeness Evaluation and the Data Usability Assessment must address how the data support the specific Permanent and Temporary Solution requirements in 310 CMR 40.1000 summarized in **Table 1**.

TABLE 1 SUMMARY OF PERMANENT AND TEMPORARY SOLUTION REQUIREMENTS

Permanent Solution	Temporary Solution			
Delineation of disposal site boundaries	Delineation of disposal site boundaries			
Characterization of Risk Oldentification of Exposure Pathways and Receptors Oldentification of Hot Spots Ocalculation of EPCs Oldentification of Background	Characterization of Risk o Identification of Exposure Pathways and Receptors o Identification of Hot Spots o Calculation of EPCs o Identification of Background			
Elimination/control of Oil and/or Hazardous Material (OHM) source(s) Achievement of background, to the extent feasible	Elimination/control of OHM source(s), to the extent feasible			
Achievement of No Significant Risk (NSR)	Achievement of No Substantial Hazard (NSH)			

The documentation must support the conclusions that: (1) disposal site conditions are adequately characterized; (2) risks to health, safety, public welfare and the environment have been adequately addressed (i.e., all Exposure Pathways have been identified, EPCs meet the applicable cleanup requirements); (3) all sources have been eliminated or controlled, to the extent required; and (4) for Permanent Solutions, background has been achieved or approached to the extent feasible.

Data generated over the course of conducting response actions should be reviewed and considered in the process of conducting the Representativeness Evaluation and Data Usability Assessment (i.e., sampling results from all assessment and remedial actions, remediation waste characterization information, pilot test results, etc.). The documentation in support of the Permanent or Temporary Solution, however, **should not** simply be a review of this information. Rather, it should be a thoughtful and succinct synthesis of the judgments and findings that are relevant and necessary to support the Permanent or Temporary Solution. Where judgments are made that certain information is more relevant and representative than other information or where inconsistent or contradictory information has been discounted or disregarded entirely, those judgments should be explicitly stated and adequately supported.

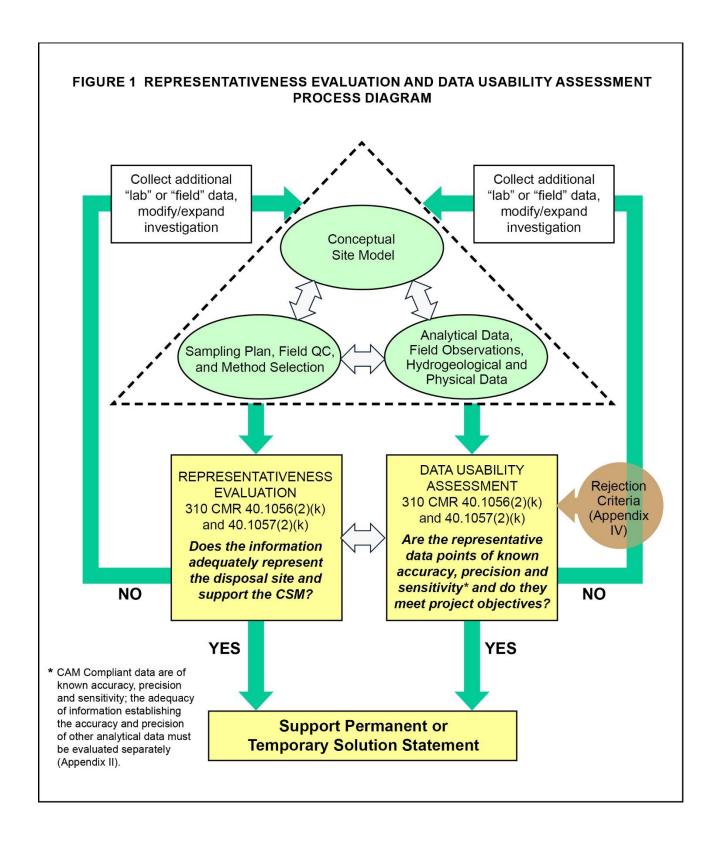

6.0 Representativeness Evaluation

The Representativeness Evaluation is an evaluation and demonstration of the adequacy of the spatial and temporal data sets used to support the Permanent and Temporary Solutions. In evaluating the adequacy of such data, information such as the site's historical use, hydrogeological and physical characteristics, field observations, and analytical screening data should be considered, in addition to CAM-compliant and other traditional "laboratory" analytical data. The Representativeness Evaluation determines whether the data set in total sufficiently characterizes conditions at the disposal site and supports a coherent CSM. The Representativeness Evaluation determines whether there is enough information from the right locations, both spatially and temporally, to support the Permanent or Temporary Solution, specifically the requirements in **Table 1**.

The Representativeness Evaluation should demonstrate the adequacy of cumulative data to characterize the nature and extent of contamination at the disposal site, the risk to health, safety, public welfare and the environment (i.e., the achievement of NSR or NSH) and the elimination/control of OHM sources.

The Representativeness Evaluation should identify inconsistent and incomplete information, and sources of uncertainty, and justify why such inconsistent information, data gaps, or uncertainty are not sufficient to undermine the Permanent or Temporary Solution Statement (i.e., justify the use of the data to support the Permanent or Temporary Solution).

Sections 6.1 through 6.8 below describe the elements that should be evaluated in a Representativeness Evaluation in support of a Permanent and Temporary Solution pursuant to 310 CMR 40.1056(2)(k) and 40.1057(2)(k).

6.1 Conceptual Site Model

The Representativeness Evaluation should provide a succinct summary of the most current disposal site CSM. The CSM is a site-specific description of what and how contaminants entered the environment, how they were transported within the system, and routes of exposure to and identification of human and environmental receptors. It provides a framework for assessing risks from contaminants, controlling or eliminating sources, developing response action strategies, and determining whether those strategies have been effective in achieving the Permanent and Temporary Solution requirements.

The CSM should be modified as necessary to incorporate new information and guide decision-making throughout the site assessment, risk characterization, and remediation of the disposal site. Its complexity is directly related to the complexity of disposal site conditions.

At the point in the response action process that a Representativeness Evaluation is prepared to support a Permanent or Temporary Solution, the CSM should be well-developed. The CSM summary should provide the following information to the extent it is relevant to characterizing disposal site conditions and supporting the Permanent or Temporary Solution:

- History of the disposal site as applicable to the potential presence of OHM;
- Geologic and hydrogeological setting;
- Description of known/likely source(s) and types of contaminants
- Description of the known/estimated volume/mass of contaminant(s) released;
- The approximate date/time period of the release(s);
- The location(s) of the release(s) and affected media and horizontal and vertical extent of the contamination;
- Description of contaminant fate and transport in the environment, including migration pathways and rates, density and hydrodynamic factors, and contaminant degradation rates and degradation products; and
- Mechanisms/pathways and points of exposure by human and ecological receptors.

Subsequent discussion of all other elements of the Representativeness Evaluation (**Sections 6.2 through 6.8**) should refer to relevant aspects of the CSM.

6.2 Use of Field/Screening Data

Use of field screening methods and the United States Environmental Protection Agency's (USEPA's) Triad approach can reduce costs, improve decision certainty, and accelerate and improve the cleanup process. MassDEP supports the appropriate use of alternative analytical approaches, including field screening methods, at 21E sites. The Representativeness Evaluation should discuss the manner in which Field/Screening Data were incorporated into decisions about field investigations and sampling, and the comparability of Field/Screening Data results and visual/olfactory observations with laboratory results. In general, Field/Screening Data do not have the same level of analytical quality control (QC), sensitivity and specificity as data produced in fixed laboratories. Consequently, Field/Screening Data should generally be used to augment or complement fixed laboratory data and should seldom be used for characterizing EPCs without laboratory confirmation of a subset of samples.

6.3 Sampling Rationale

The Representativeness Evaluation should justify that the media and locations (in terms of both area and depth) sampled are appropriate to support the conclusions of the Permanent or Temporary Solution, specifically the requirements identified in **Table 1**. The discussion should indicate the relationship and proximity of the sampling locations to source areas and impacted media; which samples are taken from within impacted areas and which are taken from outside (adjacent or above/below) impacted areas; and any samples that are considered Critical Samples (i.e., samples identified as Critical Samples in sampling plans). The discussion should support the conclusion that the sampling locations are sufficient to delineate disposal site boundaries, identify background, calculate EPCs, identify Hot Spots, identify exposure pathways and receptors, and demonstrate source elimination or control.

#WSC-25-350 10/10/2025

6.4 Number, Spatial Distribution and Handling of Samples

This component of the Representativeness Evaluation involves justifying that the number and spatial distribution of the samples within a given sampling area (as identified by the discussion under **Section 6.3**) are sufficient to support the Permanent or Temporary Solution, specifically the requirements identified in **Table 1**. This component of the evaluation should include discussion of relevant information on the density of sampling locations and the collection and handling of samples (e.g., compositing, split samples, etc.). If the contamination is distributed in an unknown or random manner due to historical use of the property, justification should be provided as to how the sampling density and distribution took this into account. As appropriate, this discussion may be combined with the discussion related to **Section 6.3**.

6.5 Temporal Distribution of Samples

For disposal site conditions that warrant monitoring over time, the Representativeness Evaluation should justify that the frequency and time period of such temporal sampling is sufficient to support the Permanent or Temporary Solution. Specifically, the evaluation should demonstrate that the requirements identified in **Table 1** are met; with respect to source control and migration control, and that EPCs accurately reflect disposal site conditions and are consistent over time. Where relevant, the discussion should address the effect of seasonal and episodic variability on disposal site conditions and contaminant concentrations and migration, particularly with respect to vapor intrusion pathways and indoor air EPC determinations.

6.6 Completeness

Data gaps should be identified and their significance discussed. Generally, target completeness for all samples identified as Critical Samples (**Section 6.3**) should be 100%.

6.7 Inconsistency and Uncertainty

The Representativeness Evaluation should justify that inconsistent information and sources of uncertainty are not sufficient to undermine the Permanent or Temporary Solution Statement. Examples of such information include historical use information that is inconsistent with contaminants found or not found, analytical results that are inconsistent with Field/Screening Data or other observations (e.g., remediation waste data) that indicate contaminants in addition to those evaluated in the risk characterization.

6.8 Information Considered Unrepresentative

Where it is not otherwise apparent or discussed in previous sections, the Representativeness Evaluation should identify information generated during the course of response actions that was not used to support the Permanent or Temporary Solution because it was determined to be unrepresentative or no longer representative of disposal site conditions (e.g., conditions changed as the result of remedial actions).

#WSC-25-350 10/10/2025

7.0 Data Usability Assessment

A Data Usability Assessment has an analytical and a field component. An Analytical Data Usability Assessment is used to evaluate whether analytical data points are scientifically valid and defensible, and of a sufficient level of precision, accuracy, and sensitivity to support the Permanent or Temporary Solution, specifically the requirements specified in **Table 1**. The Analytical Data Usability Assessment evaluates whether the analysis of "What's in the Jar" has yielded a valid result.

The Field Data Usability Assessment evaluates whether the sampling procedure (e.g., sampling method, sample preservation and holding times) ensures that the sample that is collected and delivered to the laboratory is representative of the sampling point.

The rigorousness of a Data Usability Assessment should be proportional to the complexity of the project and the ramifications of risk-related decisions associated with the interpretation of the data. **Sections 7.1 through 7.3** below describe elements of a Data Usability Assessment conducted in support of a Permanent and Temporary Solution pursuant to 310 CMR 40.1056(2)(k) and 40.1057(2)(k).

7.1 Analytical Data Usability Assessments

7.1.1 Evaluation for CAM Compliant Data

CAM Compliant data (data with "Presumptive Certainty") are of known accuracy, precision and sensitivity. Any identified analytical QC performance standard deficiencies for CAM Compliant data must be described in the Laboratory Narrative. The Analytical Data Usability Assessment should provide (1) an evaluation of the sensitivity of the CAM Compliant data in comparison with project-specific objectives, and (2) a discussion of how the uncertainty associated with any identified analytical deficiencies may affect the overall accuracy, precision and sensitivity of the analytical data and the achievement of project-specific objectives. This discussion must address any analytical data issues that were included in the Laboratory Narrative and provide justification as to why such analytical data are still considered acceptable to support the Permanent and Temporary Solutions in light of data qualifications.

7.1.2 Evaluation for CAM Non-Compliant, Non-CAM and Pre-CAM Data

Other types of analytical data (CAM Non-Compliant, Non-CAM, and Pre-CAM), subsequently referred to as "non-CAM" data, may require a more in-depth review and evaluation of the accuracy, precision, and sensitivity of these data points. Table 2 summarizes the different categories of analytical data and how such data may be used in an Analytical Data Usability Assessment. Appendix II summarizes the elements that should be considered in evaluating the accuracy, precision, and sensitivity of data points for the "non-CAM" data categories.

TABLE 2 ANALYTICAL DATA USABILITY CONSIDERATIONS FOR DIFFERENT DATA CATEGORIES

	DATA QUALITY CATEGORY	DEFINITION	ANALYTICAL DATA USABILITY CONSIDERATIONS
	CAM Compliant	Analytical results (1) determined using an "MCP Analytical Method" detailed in the CAM; (2) that comply with method-specific QC requirements specified in CAM; (3) that are reported with a narration of method–specific performance standard deficiencies, as necessary; and (4) reported with the required deliverables specified in the CAM for MCP analytical data. CAM Compliant data are data with "Presumptive Certainty".	CAM-compliant analytical data meeting method- and project-specific Data Quality Objectives may be used to support a Permanent and Temporary Solution pursuant to 310 CMR 40.1056 (2)(k) and 40.1057(2)(k). The Analytical Data Usability Assessment should discuss how any analytical deficiencies might affect the overall accuracy, precision and sensitivity of the analytical data. The effect of any Laboratory Narrative issues must be evaluated in the Data Usability Assessment.
Analytical Data	CAM Non-Compliant	Analytical results determined using an "MCP Analytical Method" detailed in the CAM that: (1) are not in compliance with method-specific QC requirements specified in the CAM; (2) do not include a narration of method—specific performance standard deficiencies, as necessary; and/or (3) do not include the required deliverables specified in the CAM for MCP analytical data.	Analytical data other than "CAM Compliant" may be used to support a Permanent and Temporary Solution pursuant to 310 CMR 40.1056 (2)(k) and 40.1057(2)(k), but only after any uncertainties associated with identified data deficiencies, with respect to the overall accuracy, precision and sensitivity of the analytical data, are evaluated. See Appendix II .
Non-CAM"	Non-CAM	Analytical results determined using an analytical method that is not currently included in the CAM.	
V	Pre-CAM	Analytical results determined using any analytical method before August 1, 2003 for methods included in the CAM.	

In addition to supporting the use of "non-CAM" data by an evaluation of the elements in **Appendix II**, other circumstances in which "non-CAM" data may be used to supplement CAM data points include:

- <u>Consistency</u> where consistency (i.e., consistent concentrations and trends) can be demonstrated between "non-CAM" data and CAM data generated for comparable samples at the disposal site;
- <u>Lack of risk associated with use of the data</u> where it can be clearly demonstrated that any uncertainties related to the "non-CAM" data are unlikely to affect the conclusions of the Permanent or Temporary Solution or the risk characterization on which it is based.

Under such circumstances, documentation of consistency or lack of risk, as described above, may be sufficient to demonstrate the usability of data to supplement CAM data points, and additional documentation as specified in **Appendix II** would not be necessary.

7.1.3 Data Evaluation Criteria

All data supporting the Permanent and Temporary Solutions should be evaluated to determine whether the data are usable for that purpose. **Appendix III** summarizes how the precision, accuracy, comparability, completeness, and sensitivity (PARCCS) parameters apply to the evaluation of data usability and any project-specific Data Quality Objectives. Any limitations or qualifications on the use of the data in the Permanent and Temporary Solutions should be stated and explained in the Data Usability Assessment documentation.

The Analytical Data Usability Assessment should evaluate whether the Reporting Limits (RLs)/Lower Limits of Quantitation (LLOQs) for the analyses are sensitive enough to support the Permanent or Temporary Solution, specifically the requirements identified in **Table 1**. For example, if the analysis is conducted to determine an EPC and compare the EPC to a Method 1 standard, the RL/LLOQ must be at/below the Method 1 standard.

7.2 Field Data Usability Assessment

Use of appropriate sampling methods is a critical component of ensuring sample integrity. In addition, how samples are handled in the field (e.g., split samples, compositing, etc.), as well as the use of proper sampling containers and preservatives, are essential to minimizing any potential loss of contaminants of concern prior to laboratory analysis and ensuring that the sample delivered to the laboratory for analysis is representative of field conditions. The application of field QC elements should be commensurate with the data's intended use. **Table 3** provides a summary of different field QC elements to be considered/used both when collecting samples and subsequently in evaluating the quality of analytical results. MassDEP's Compendium of Analytical Methods Quality Assurance and Quality Control Guidelines for the Acquisition and Reporting of Analytical Data in Support of Response Actions Conducted Under the Massachusetts Contingency Plan (MCP) (WSC-CAM-VIIA) provides general guidance on the use of field QC

elements for all samples and specifies minimum field QC requirements for drinking water samples (See WSC-CAM-VIIA, Section 2.0). Any field QC issue identified through field QC elements that would limit or qualify the use of data presented in support of the Permanent or Temporary Solution should be identified and discussed in the Data Usability Assessment.

7.3 Rejection of Analytical Data as the Result of Gross Failure

Data under consideration for use in support of a Permanent or Temporary Solution should be assessed against the criteria indicative of "gross failure" in QC as described in **Appendix IV**. Data that are deemed unusable as the result of a gross failure of QC in the process of sampling or analysis should not be used to support a Permanent or Temporary Solution (see **Figure 1**).

TABLE 3 FIELD QUALITY CONTROL ELEMENTS TO BE CONSIDERED FOR ALL ANALYTICAL DATA CATEGORIES

Review Element	Field Quality Control Indicators
Sampling Procedure	Field Accuracy/Field Precision
Sample Containers and Sample Preservation	Field Accuracy
Holding Times	Field Accuracy
Field Duplicates	Field Precision
Matrix Spikes/Matrix Spikes Duplicates	Field Accuracy/Field Precision
Equipment Blank/Trip Blank	Field Accuracy/Sensitivity

8.0 Conclusions

In addition to addressing the elements outlined in Sections 6.0 and 7.0, the Representativeness Evaluation and Data Usability Assessment narrative submitted in support of a Permanent or Temporary Solution should contain a conclusions section that summarizes the overall findings of the evaluations.

9.0 Documentation

The Representativeness Evaluation, Data Usability Assessment and Conclusions should be documented in the Permanent and Temporary Solution submittals as a distinct section. This documentation should include the information outlined in this guidance. The length and detail of this documentation should be commensurate with the complexity of the disposal site conditions, the amount of analytical and other data collected and evaluated

in support of the Permanent or Temporary Solution, and issues identified in the Representativeness Evaluation and Data Usability Assessment. Parties are encouraged to use the **Representativeness and Data Usability Worksheet** provided in **Appendix V** for such documentation. **Appendix VI** provides a **Data Summary Table** format that may be used to summarize the analytical data generated in the course of response actions. For many disposal site scenarios, completed worksheets alone may be sufficient to document the information needed to meet the Representativeness Evaluation and Data Usability Assessment requirements.

APPENDIX I DEFINITIONS OF KEY TERMS

Analytical Data Usability Assessment means a systematic evaluation of the uncertainty associated with analytical data points in terms of their accuracy and precision conducted pursuant to 310 CMR 40.1056(2)(k) and 40.1057(2)(k). It determines whether an individual analytical data point is indicative of the location sampled and establishes or qualifies to what extent the analytical data for that sampling point meet applicable Data Quality Objectives, and are suitable for use in a Representativeness Evaluation pursuant to 310 CMR 40.1056(2)(k) and 40.1057(2)(k).

Note: The USEPA uses the term "Data Usability" to encompass a range of factors used to evaluate the quality and adequacy of data points and data sets. Data Usability as defined by USEPA includes consideration of precision, accuracy, representativeness, completeness, comparability and sensitivity (a.k.a. the PARCCS parameters). Under the MCP, the "Representativeness Evaluation" is a distinct evaluation of all data (not just analytical) used to support the Permanent or Temporary Solution. Parties familiar with the USEPA's use of the terms related to Data Usability should be aware of the differences in the way USEPA and the MCP and this guidance apply these terms. **Appendix III** presents how PARCCS parameters apply to Data Usability Assessments for the MCP process.

CAM Compliant means analytical results: (1) determined using an "MCP Analytical Method" detailed in the CAM; (2) that comply with method-specific QC requirements specified in CAM;

(3) that are reported with narration of method-specific performance standard deficiencies, as necessary; and (4) reported with the required deliverables specified in the CAM for MCP analytical data. CAM Compliant data are data with "Presumptive Certainty".

CAM Non-Compliant means analytical results determined using an "MCP Analytical Method" detailed in the CAM that: (1) are not in compliance with method-specific QC requirements specified in the CAM; (2) do not include narration of method-specific performance standard deficiencies, as necessary; and/or (3) do not include the required deliverables specified in the CAM for MCP analytical data.

Compendium of Analytical Methods (CAM) is a MassDEP publication that provides (a) information and guidance to all parties on analytical and data quality issues, and (b) requirements and specifications for those parties who wish to obtain "Presumptive Certainty" for satisfying the data quality requirements of the MCP at 310 CMR 40.0017 and 310 CMR 40.0191.

Conceptual Site Model (CSM) is a description of what contaminants are present, how they entered the environment, how they were transported within the system, and routes of exposure to and identification of human and environmental receptors. It provides a framework for assessing risks from contaminants, controlling or eliminating sources, developing response action strategies, and determining whether those strategies have been effective in achieving the Permanent or Temporary Solution requirements.

APPENDIX I DEFINITIONS OF KEY TERMS

Critical Sample means a sample for which a usable result is necessary to support a conclusion that the response action objectives have been met (i.e., absent a usable result for such sample, it cannot otherwise be demonstrated that the objective has been achieved).

Data Quality Objectives are the qualitative and quantitative statements that clarify an assessment's technical and data quality goals, define the appropriate type of data to be obtained, and specify tolerable levels of potential decision errors that will be used as the basis for establishing the quality and quantity of data needed to support decisions.

Data Usability Assessment means an assessment of whether data are scientifically valid and defensible, and of a sufficient level of precision, accuracy, and sensitivity to support the response action decision. A Data Usability Assessment has an analytical and a field component (see **Analytical Data Usability Assessment** and **Field Data Usability Assessment**).

Field Data Usability Assessment means an evaluation of the sampling procedure (e.g., sampling method, preservation, holding times) and, as appropriate, field QC elements to ensure the quality of the sample and to identify any issues of concern that may limit or qualify the use of the data.

Field/Screening Data means data produced in the field using test kits, hand-held instruments and/or "portable" laboratory instruments with or without pre-concentration.

Laboratory Narrative means a discussion provided by the laboratory of any performance standard non-conformances.

Non-CAM means an analytical result determined using an analytical method that is not currently included in the CAM. (Common examples include dioxins/furans, PCB congeners or homologues, and various wet chemistry analyses.)

Pre-CAM means an analytical result determined using an analytical method conducted prior to August 1, 2003 for methods included in the CAM.

Representativeness Evaluation means a comprehensive evaluation of the adequacy of spatial and temporal data sets in representing disposal site conditions and supporting environmental decision-making. As used in this definition, information for determining whether the data are spatially and temporally adequate includes the site's historical use, hydrogeological and physical characteristics, field observations and similar data in addition to analytical data. The Representativeness Evaluation, pursuant to 310 CMR 40.1056(2)(k) and 40.1057(2)(k), must consider the full range of data gathered over the course of the response action process. The rigorousness of the Representativeness Evaluation should be proportional to the complexity of the project and the CSM and the ramifications of risk-related decisions associated with the evaluation of disposal site conditions.

APPENDIX II ELEMENTS FOR EVALUATING THE ACCURACY, PRECISION AND SENSITIVITY OF CAM NON-COMPLIANT, NON-CAM AND PRE-CAM DATA CATEGORIES

Table II-I	Elements for Evaluating the A Non-Compliant, Non-CAM and	Accuracy, Precision and Sensitivity of CAM d Pre-CAM Data Categories				
	Review Element	Data Quality Indicator				
	tography/Mass Spectrometry nes (GC/MS methods only)	Laboratory Accuracy				
Endrin/DDT E	Breakdown (Pesticides only)	Laboratory Accuracy				
Initial Calibra	tion (RL/LLOQ)	Laboratory Accuracy/Sensitivity				
Continuing C	alibration	Laboratory Accuracy/Sensitivity Laboratory Accuracy Laboratory Accuracy Laboratory Accuracy Laboratory Sensitivity and Laboratory Cross-Contamination Evaluation Laboratory Accuracy				
Bile Salt Inte	rference Check (PFAS only)	Data Quality Indicator Laboratory Accuracy Laboratory Accuracy Laboratory Accuracy/Sensitivity Laboratory Accuracy Laboratory Accuracy Laboratory Accuracy Laboratory Accuracy Laboratory Sensitivity and Laboratory Cross-Contamination Evaluation Laboratory Accuracy Laboratory Accuracy Laboratory Accuracy Laboratory Accuracy Laboratory Accuracy Laboratory Accuracy and Precision Method Accuracy in Sample Matrix Method Accuracy and Precision in Sample Matrix Accuracy in Sample Matrix Laboratory Accuracy and Method Accuracy in Sample Matrix Laboratory Accuracy Ensures Consistent Reporting and Compliance with CAM and/or Sufficient Information Available to				
Interference	Checks (Metals only)	Laboratory Accuracy Laboratory Sensitivity and Laboratory Cross-Contamination Evaluation Laboratory Accuracy Laboratory Accuracy Laboratory Accuracy Laboratory Accuracy Laboratory Accuracy and Precision Method Accuracy in Sample Matrix Method Accuracy and Precision in Sample Matrix Accuracy in Sample Matrix Laboratory Accuracy and Method Accuracy in Sample Matrix Laboratory Accuracy Ensures Consistent Reporting and Compliance with				
Method Blanl	<s< td=""><td colspan="4"></td></s<>					
Laboratory C	ontrol Spikes (LCS)	Laboratory Accuracy				
Ongoing Pred Standard (PF	cision and Recovery (OPR) (AS only)					
Laboratory C	ontrol Spike Duplicate (LCSD)	Laboratory Accuracy and Precision				
Matrix Spikes	s (MS)					
	ate (MD) and Duplicates (MSD)	Method Accuracy and Precision in Sample Matrix				
Surrogate Sp PFAS)	oike Recovery (Organics only – Non	Accuracy in Sample Matrix				
Extraction Int	ernal Standards (PFAS only)					
Internal Stan	dards					
Non-Extracte	d Internal Standards (PFAS only)	Cample Mann				
Fractionation	Check Standard (EPH only)	Laboratory Accuracy				
Laboratory N	arrative and Data Report					

Table II-II	Additional Elements to Consider for Analytical Data Usability Assessment of Non-CAM, Pre-CAM, and Field/Screening Data									
	Review Element	Data Quality Objective								
Standard Ope	rating Procedure (SOP)	Overall Method Consistency and Reproducibility								
Initial Demons	stration of Proficiency	Overall Analytical Performance								
Non-CAM, Pre	ments Which May be Required for e-CAM and Field Screening ed on Review of SOP or Method	To Be Determined Based on SOP or Method Review								

APPENDIX III US	APPENDIX III USE OF PARCCS PARAMETERS FOR MCP DATA USABILITY ASSESSMENT ¹											
QC Element	Laboratory Measures	Field Measures	Basis of Evaluation									
Precision	Laboratory Control Samples (LCS) LCS Duplicates (LCSD) Matrix Spike Duplicates (MSD) Matrix Duplicates Historical Data Trends	Field Duplicates Matrix Spike Duplicates Matrix Duplicates Appropriate Sampling Procedure	Evaluation of Project Precision Data Quality Indicators by Media Type. Evaluation of Compliance with Project's Data Quality Objectives.									
Accuracy	LCS, LCSD OPR Standard Matrix Spike (MS), MSD Internal Standards Non-Extracted Internal Standards Surrogates Extraction Internal Standards Initial Calibration Continuing Calibration Standard Reference Material Bile Salt Interference Check	Matrix Spikes/Matrix Spike Duplicates Inclusion of "Blind" Samples Appropriate Sampling Procedures Appropriate Sample Containers Appropriate Sample Preservation Holding Times Equipment Blank/Field Blank	Evaluation of Project Accuracy Data Quality Indicators by Media Type. Evaluation of Compliance with Project's Data Quality Objectives.									
Representativeness	Laboratory Homogenization Appropriate Sub-sampling Appropriate Dilutions "As Received" Sample Preservation Meeting Holding Times	Appropriate Sampling Procedures Appropriate Sample Containers Appropriate Sample Preservation Incorporation of Field Screening Data	Evaluation of Consistency of Data with CSM. Evaluation of Consistency of Analytical Data with Field Data and Hydrogeological Site Data. Evaluation of Spatial and Temporal Variabilities.									
Comparability GC/MS Tuning Calibration Analytical Method Followed		Comparison to Previous Data Points Comparison to Similar Data Points	Evaluation of Inter-comparability of All Site Data and Information by Media Type.									
Completeness	% Sample Per Batch Analyzed and Reported All Critical Samples Reported and Unqualified	% Planned Samples Collected All Critical Samples Collected	Analyte List Consistent with Site History. Number of Data Points Adequate to Describe the Magnitude and Areal Extent of Release.									
Sensitivity	Method Blanks Instrument Blanks RL/LLOQ (Lowest Calibration Standard) Appropriate Analytical Method	Equipment Blank/Field Blank Appropriate Sample Volume or Weight	Evaluate Whether RLs/LLOQs for Data Adequate to Demonstrate Compliance with Applicable Standards.									

¹ Note: Some of these PARCCS measures are not required deliverables for CAM data. In general, CAM data require reporting of LCS/LCSD, OPR, Method blanks, surrogates, and extraction internal standards. MS/MSD/MD are performed and reported upon project-specific request.

#WSC-25-350

APPENDIX IV REJECTION CRITERIA – ANALYTICAL DATA USABILITY ASSESSMENTS

<u>Purpose:</u> To determine if data are unusable for supporting a Permanent or Temporary Solution due to gross failure of quality control.

References:

Region 1 – USEPA New England, Environmental Data Review Program Guidance, June 2018

Region 1 – USEPA New England, *Environmental Data Review Supplement for Region 1 Data Review Elements and Superfund Specific Guidance/Procedures*, September 2020

USEPA National Functional Guidelines for Organic Superfund Methods Data Review (EPA-540-R-20-005), November 2020

USEPA National Functional Guidelines for Inorganic Superfund Methods Data Review (EPA 542-R-20-006), November 2020

<u>Definition of Rejected Data</u>: The data are unusable (analyte/compound may or may not be present) due to gross failure of quality control criteria and cannot be used to support project objectives.

<u>Inorganic Criteria for Rejection of Data:</u> Applicable to metals, hexavalent chromium, cyanide, perchlorate, and other inorganic parameters.

- Holding Time (HT): "Gross" violation of HT; "gross" = greater than two times the allowable HT: reject all non-detected results
- Laboratory Control Sample (LCS) and LCS Duplicate Recoveries:
 - Aqueous samples only: recovery < 50%: reject results for affected analyte in all associated samples in batch (up to 20 associated samples) (professional judgment commonly used if LCS < 50% but MS shows acceptable recovery to determine result as usable; professional judgment may be used to reject non-detected results only)
 - Soil: solid LCS or Standard Reference Material recoveries compared to vendor control limits: use professional judgment on rejection of data
- Internal Standards (Perchlorate only): Area counts < 10% of associated calibration standard: reject associated non-detected results in affected sample
- Matrix Spike (MS) or Post-digestion Spike Recoveries: recovery < 30%: reject non-detected results for affected analyte in all associated samples of similar matrix in batch (up to 20 associated samples). Exceptions:
 - Low recovery of hexavalent chromium in soils/sediments may be acceptable if supported by pH and ORP data which demonstrate reducing conditions
 - Post-digestion spike recoveries only cause rejection of results if associated analyte in MS/MSD also fails.
- Professional Judgment: Example severely poor overall instrument performance may cause all associated data to be rejected; if percent solids content very low (<10%), may reject data

<u>Organic Criteria for Rejection of Data:</u> Applicable to VOCs, SVOCs, Pesticides, PCBs, Explosives, PFAS, and herbicides, and can also be applied to VPH/EPH.

- Holding Time (HT): "Gross" violation of HT; "gross" = greater than two times the allowable HT: reject all non-detected results
- Sample Preservation (VOCs & VPH only): Soil/sediment samples without methanol (for VOCs/VPH) or water (alternative for low-level VOCs only) preservation: reject all non-

- detected results
- Laboratory Control Sample (LCS), LCS Duplicate, and Ongoing Precision and Recovery (OPR) Standard Recoveries: recovery < 10%: reject non-detected results for affected compound in all associated samples in batch.
- Surrogate Recoveries: recovery < 10%: reject associated non-detected results (see CAM method for compounds associated with surrogate by class) in affected sample, except if low recovery is due to necessary analytical dilution(s)
- Extraction Internal Standard (EIS) Recoveries: recovery <5% and signal/noise ratio <10:1: reject associated non-detected results (see USEPA method 1633 for compounds associated with EIS) in affected sample
- Matrix Spike (MS)/Matrix Spike Duplicate (MSD) Recoveries: recovery < 10%: reject nondetected results for affected compound in unspiked field sample only (i.e., field sample used for MS/MSD only)
- Calibrations: relative response factor (RRF) < 0.05 (with no technical justification for RRF being lower): reject non-detected results for affected compound in all associated samples
- Internal Standards: Area counts < 20% of associated Calibration Standard: reject associated non- detected results in affected sample, depending on which compounds are quantitated with the affected internal standard
- Fractionation Check Standard Recoveries (EPH only): recovery < 10%: reject non-detected results for affected compound in all associated samples
- Non-Extracted Internal Standard (NIS) Recoveries: recovery <5% and signal/noise ratio <10:1: reject associated non-detected results (see USEPA method 1633 for compounds associated with NIS) in affected sample. Rejection of affected results will be based on professional judgement. If the recovery of the associated EIS is within the acceptance criteria, rejection may not be warranted. If the NIS recovery is low due to a bad injection or significant matrix suppression, rejection of the associated non-detected results may be warranted
- Dual Column Precision: Percent difference (%D) > 100% for single-component pesticides and herbicides: reject positive and non-detected results; % D > 500% for multicomponent pesticides and Aroclors: reject positive and non-detected results
- Endrin/DDT Breakdown: Breakdown >20%: reject non-detected results for endrin or DDT, whichever is affected, in all associated samples
- Professional Judgment: Example severely poor overall instrument performance may cause all associated data to be rejected; if percent solids content very low (<10%), may reject data

APPENDIX V REPRESENTATIVENESS AND DATA USABILITY WORKSHEET

A. Representativeness Evaluation (Specific to info Permanent or Temporary Solution. Refer to Section	
 A-1 Provide a succinct summary of the Conceptual Site Model (CSM) for the disposal site. Discussion should include: Disposal site history Geologic/hydrogeological setting Contaminant Source(s) and Type(s) Description of the volume/mass and types of contaminants released to the environment Date/time period of release(s), if known Release location, affected media, and horizontal and vertical extent of the contamination Contaminant migration pathways Mechanism/pathways and points of exposure by human and ecological receptors (Refer to Section 6.1) 	
 A-2 Discuss use of Field/Screening Data in response action decision making, including: Contaminant of Concern screening/elimination Selection of sampling locations Comparison to laboratory results Comparison to visual/olfactory observations (Refer to Section 6.2) A-3 Discuss and justify sampling locations and depths collected in support of a Permanent or Temporary Solution regarding: For Permanent Solutions Delineation of disposal site boundaries (horizontal and vertical) Elimination/control of OHM source(s) Characterization of Risk (Exposure Pathways/Receptors, Hot Spots, samples included in EPCs, Background) Achievement of No Significant Risk (NSR) For Temporary Solutions Delineation of disposal site boundaries (horizontal and vertical) Elimination/control of OHM source(s) Characterization of Risk (Exposure 	() No Field/Screening Data were used to directly support this Permanent or Temporary Solution. () Field/Screening Data were used, as follows:
Pathways/Receptors, Hot Spots, samples included in EPCs, Background) -Achievement of No Substantial Hazard (NSH) (Refer to Table1 and Section 6.3; A-3 and A-4 of the worksheet may be combined, as appropriate.)	

A. Representativeness Evaluation (Specific to info Permanent or Temporary Solution. Refer to Section			
A-4 Discuss and justify the density, spatial distribution, collection methods, and handling (compositing, split sampling) of samples collected in support of a Permanent or Temporary Solution (in relation to the justification provided in A-3 for meeting the Permanent or Temporary Solution requirements)			
(Refer to Table 1 and Section 6.4)			
A-5 Identify disposal site conditions, if any, that warrant the collection and analysis of temporal samples. For disposal sites that require monitoring over an extended time period, discuss and justify the number and time interval for sampling rounds conducted in support of the Permanent or Temporary Solution for the following: For Permanent Solutions - Delineation of disposal site boundaries (horizontal and vertical) - Characterization of Risk (Exposure Pathways/Receptors, Hot Spots, samples included in EPCs, Background) - Elimination/control of OHM source(s) - Achievement of No Significant Risk (NSR) For Temporary Solutions - Delineation of disposal site boundaries (horizontal and vertical) - Characterization of Risk (Exposure Pathways/Receptors, Hot Spots, samples included in EPCs, Background) - Elimination/control of OHM source(s) - Achievement of No Substantial Hazard (NSH) (Refer to Table 1 and Section 6.5)	() Temporal sampling not warranted for this disposal site.		
A-6 Field Completeness of Data: Discuss data gaps identified			
in sampling and analytical information used to support the Permanent or Temporary Solution and their significance.			
(Refer to Section 6.6)			
A-7 Identify any inconsistent information or uncertainty and justify disregarding such information or uncertainty (e.g., site assessment data inconsistent with historical information, field screening data/observations inconsistent with analytical data, use of data to support the Permanent or Temporary Solution in spite of identified analytical or other deficiencies, etc.) in rendering the Permanent or Temporary Solution Statement.			
(Refer to Section 6.7)			

A. Representativeness Evaluation (Specific to information/samples used to support the Permanent or Temporary Solution. Refer to Section 6.0 through 6.8.)

A-8 Where it is not otherwise apparent or discussed in previous sections, identify/discuss information generated during the course of response actions that was not used to support the Permanent or Temporary Solution because it was determined to be unrepresentative or no longer representative of disposal site conditions.

(Refer to Section 6.8)

B. <u>Data Usability Assessment</u> (Specific to Temporary Solution. Refer to Table 1, Secand IV.)	o samples used to support the Permanent or ction 7.0 through 7.3, and Appendices I, II, III				
B-1 List all MCP activities that provided the analytical data reviewed in the course of conducting the Data Usability Assessment in support of the Permanent or Temporary Solution. Include the media sampled and the month and year the data were acquired.	() Listed below. () Attached separately (provide attachment reference).				
B-2 Discuss appropriateness of selected analytical methods to quantitatively support the Permanent or Temporary Solution.					
B-3 Discuss appropriateness of selected analytical methods' Reporting Limits (RLs)/Lower Limits of Quantitation (LLOQs) to quantitatively support the Permanent or Temporary Solution.	() All RLs/LLOQs were at or below applicable standards.				
B-4 Discuss laboratory performance criteria and data quality indicators used to assess overall Analytical Accuracy (continuing calibration, laboratory control spikes, etc.) and Analytical Precision (laboratory duplicates, laboratory control spike duplicates, etc.). For CAM data, see MCP Analytical Method Report Certification Form and Laboratory Narrative.	 () Met all CAM requirements and performance standards without qualification. () If not, discuss data usability implications. 				
B-5 Discuss performance criteria and data quality indicators used to assess overall Field Data Usability (sample preservation compliance, sample sub sampling/compositing, etc.).					
B-6 Discuss any data rejected pursuant to Appendix IV , Rejection Criteria – Analytical Data Usability Assessments.	() No data rejected pursuant to Appendix IV .				
C. Representativeness Evaluation and Data Conclusions (Refer to Section 8.0)	ta Usability Assessment Summary and				
Provide a summary declaration that the data set relied upon to support the Permanent or Temporary Solution	is:				
Scientifically valid and defensible, and of sufficient accuracy, precision and completeness; and					
Representative with regards to the spatial attemporal distribution of sampling points.	nd				

APPENDIX VI DATA SUMMARY TABLE

Sample ID or Series	Parameters	Date	9	Groun	Surface	water Sedi	mer	Air	se Char	acteritati Qacke	ton to	C's Lifethation CAM Compilars	Data Qualifications, if any (brief explanation)
												Yes () NO ()	
												Yes()NO()	
												Yes()NO()	
												Yes()NO()	
							П					Yes()NO()	
												Yes()NO()	
												Yes()NO()	
												Yes()NO()	
												Yes()NO()	
												Yes()NO()	
												Yes()NO()	
												Yes()NO()	
												Yes()NO()	
												Yes()NO()	
		1										Yes () NO ()	

#WSC-25-350