

## CHAPTER 7

### BRIDGE LOAD RATING GUIDELINES

#### 7.1 POLICY

##### 7.1.1 Purpose

This chapter establishes policy to be used by MassDOT and Consultant Rating Engineers in determining the safe load carrying capacity of newly built and existing bridges. The development of a bridge load rating requires engineering judgment and the implementation of sound engineering principles that are commonly accepted in the field of bridge engineering.

Load rating for a bridge shall be performed using the same methodology that was used for its design. The majority of existing bridges in the Commonwealth of Massachusetts were designed using the Allowable Stress Design (ASD) method. In general, the Central Artery bridges were designed using the Load Factor Design (LFD) method and more recently all bridges have been designed using the Load and Resistance Factor Design (LRFD) method. It is the responsibility of the Rating Engineer to determine the method that will be used for development of the load rating.

Load ratings are performed to evaluate and identify substandard bridges requiring posting, and to assist in determining the bridges requiring rehabilitation or replacement. Additionally, FHWA requires reporting of bridge load ratings on an annual basis.

Massachusetts General Laws require the determination of the **maximum weight of vehicle with load which a bridge will safely carry** for **the Rating** Vehicles as defined in the sections that follow.

FHWA memoranda, specifically **Load Rating of Specialized Hauling Vehicles**, dated November 15, 2013, and **Load Rating for the FAST Act's Emergency Vehicles**, dated November 3, 2016 identify additional **Rating Vehicles** to be load rated. FHWA has information regarding the load rating of these vehicles **on the Bridges and Structures page of their Program Policy & Guidance Center website**.

##### 7.1.2 Rating Specifications

All bridges shall be rated in accordance with the provisions of the current *AASHTO Manual for Bridge Evaluation*, including all Interims except where modified by this Bridge Manual.

Section 6 of the *AASHTO Manual for Bridge Evaluation* is divided into two parts. Part A of the *AASHTO Manual for Bridge Evaluation* incorporates provisions specific to the **Load and Resistance Factor Rating (LRFR)** methodology, whereas Part B provides rating criteria and procedures for the Allowable Stress Rating (ASR) and Load Factor **Rating (LFR)** methods of evaluation.

In the articles that follow a designation of “A” or “B” is used to differentiate between the LRFR methodology and the Allowable Stress/Load Factor methodology, respectively.

### 7.1.3 Definitions

For the purpose of these guidelines, the following definitions shall be used:

**BrR – AASHTOWare™ Bridge Rating**, version currently in use by MassDOT at the time a load rating is performed

**MS18** – metric equivalent of the HS20

**Statutory** – the total weight specified for a given Rating Vehicle or notional load

### 7.1.4 Qualifications

All bridge ratings shall be prepared under the direction of a Rating Engineer who shall be a Professional Engineer registered in the Commonwealth of Massachusetts in Responsible Charge of the work, or by a MassDOT Engineer under the direction of the State Bridge Engineer. Engineers performing the analysis shall be knowledgeable in bridge design and familiar with the relevant AASHTO specifications.

All bridge ratings shall also be reviewed by an Independent Reviewer who is a Professional Engineer registered in the Commonwealth of Massachusetts and who will sign the Statement of Concurrence as required in Subsection 7.4.3.

### 7.1.5 Field Verification

The Rating Engineer shall field verify what is contained on the latest plans, latest inspection reports, and prior bridge rating reports. If during the verification, the Rating Engineer finds a changed condition that is not noted or documented sufficiently on the latest inspection report, the Rating Engineer shall notify the State Bridge Engineer, and shall obtain documented measurements of the changed condition prior to incorporating the findings and the documented measurements into the Rating Report. Section losses used to calculate load ratings shall not be based on assumed conditions.

If during the field verification, a condition that meets the definition of a Critical-Structural or Critical-Hazard Deficiency is identified, the Rating Engineer shall follow the requirements of Section 4.7, CS/I & CH/I Procedure and Documentation, of the *MassDOT Bridge Inspection Handbook* for guidance on action that shall be taken.

### 7.1.6 Load Rating Software

7.1.6.1 MassDOT currently utilizes AASHTOWare™ Bridge Rating (BrR) software (formerly known as Virtis) as the standard software for load rating purposes. The assignment letter will provide the Rating Engineer with the required version of BrR, which is presently used by the Bridge Section. It is the Rating Engineer's responsibility to ensure that ratings are being performed with the correct release. The Rating Engineer is also responsible for checking with the BrR Support Center for any known software issues that could affect the rating results. If issues found with BrR in the process of rating a structure cannot be resolved prior to submitting the report, then they shall be addressed through alternative calculations and documented in the Rating Analysis Assumptions and Criteria section of the Rating Report.

7.1.6.2 Where the Rating Engineer determines, and the State Bridge Engineer concurs, that a structure cannot be properly analyzed using the BrR load rating software, the Rating Engineer shall discuss the software proposed with the State Bridge Engineer prior to developing a scope and fee for the rating.

7.1.6.3 Rating Engineers working for firms that do not have licensed copies of the required software may perform the load rating(s), with prior approval, by utilizing one of the guest computers located in the Bridge Section office in Room 6430 of the State Transportation Building.

### 7.1.7 Units

7.1.7.1 All bridge ratings shall be performed using U.S. Customary units. If the bridge was designed and detailed using metric units, the bridge geometry and section properties shall be converted using exact conversion factors and the rating calculations shall be prepared using U.S. Customary units.

7.1.7.2B In accordance with requirements of the December 1995 FHWA NBIS Coding Guide an Inventory and Operating Rating shall be obtained for the HS20 vehicle using the Load Factor Method. Timber and stone masonry structures are exempt from this requirement and shall be reported based upon the Allowable Stress Method. The gross tonnage is reported on the Summary Sheet of the rating report for Item 64 and Item 66. Since MassDOT reports these Items in metric units, the gross tonnage results from the rating calculations performed in U.S. Customary units shall be converted to metric units. The HS20 truck gross tonnage shall be converted to an MS18 gross tonnage using a conversion factor of 0.9, instead of the exact conversion of 0.907185 metric tons per U.S. short ton. An MS Equivalent to Items 64 and 66 shall be calculated by dividing the MS18 gross tonnage by 1.8. The resulting MS18 metric ton ratings and MS Equivalent shall be specified on the Summary Sheet in the spaces provided for Item 64 and Item 66. The header in the MS18 FHWA NBIS CODING GUIDE table in the Summary of Bridge Rating shall be revised to note Allowable Stress Rating rather than Load Factor Rating for timber and stone masonry structures.

## 7.2 GENERAL LOAD RATING REQUIREMENTS

### 7.2.1A Bridge Projects Designed using LRFD

Ratings for bridges designed using LRFD shall be based on the plans, as-built conditions and the latest bridge inspection reports. The ratings shall be performed in accordance with Part A of the *AASHTO Manual for Bridge Evaluation*. For bridges that have not been rated previously, ratings shall be provided using as-built member properties and the reported and field verified section losses.

### 7.2.1B Bridge Projects Designed using ASD/LFD

Ratings for bridges designed using ASD or LFD shall be based on the plans, as-built conditions and the latest bridge inspection reports. The ratings shall be performed using the appropriate rating methodology, i.e. ASR for ASD designed bridges and LFR for LFD designed bridges, in accordance with Part B of the *AASHTO Manual for Bridge Evaluation*. For bridges that have not been rated

previously, ratings shall be provided using as-built member properties and the reported and field verified section losses.

## 7.2.2 Elements Requiring Load Rating

7.2.2.1 Stringer/girder bridges will require ratings for the primary elements. The Rating Engineer shall rate the following “points of interest” along the girder length:

- a. 0.5L for simple span bridges
- b. 0.375L and 0.75L for continuous span bridges
- c. Points of support
- d. Location of change(s) in the girder cross section
- e. Theoretical (not actual) cover plate cut-off locations
- f. Locations of measurable section loss
- g. Repair locations
- h. Locations where there are reinforcement discontinuities in concrete girders
- i. The critical shear location, as defined by AASHTO, of the prestressed or reinforced concrete beams, in lieu of the points of support.
- j. Hold down points for draped strands in prestressed concrete beams
- k. Theoretical development location of debonded stands in prestressed concrete beams
- l. Any other location that controls.

7.2.2.2 For girder/floorbeam/stringer bridges and girder/floorbeam bridges all elements shall be rated at locations similar to those outlined in Paragraph 7.2.2.1 above.

7.2.2.3A For truss bridges all chords, diagonals, floorbeams, stringers, bracing, and gusset plates require load ratings. Floorbeams and stringers shall be rated for flexure and shear, and any loss of section shall be accounted for. All main member gusset plates shall be rated in accordance with the AASHTO Manual for Bridge Evaluation and accounting for any loss of section.

7.2.2.3B For truss bridges all chords, diagonals, floorbeams, stringers, bracing, and gusset plates require load ratings. Floorbeams and stringers shall be rated for flexure and shear, and any loss of section shall be accounted for. Due to the inability of BrR to perform complete ASD load ratings for truss members, these ratings shall be performed by using BrR to develop member forces, but all capacity and rating factor calculations shall be performed outside of BrR. Other MassDOT approved software may be used in the same manner, however an explanation regarding how to export results from the analysis and import them into the calculations shall be provided.

All main member gusset plates shall be rated using LFR for both ASD and LFD designed trusses in accordance with the AASHTO Manual for Bridge Evaluation and accounting for any loss of section.

7.2.2.4 For straight stringer bridges a 1-D line girder analysis shall be used whenever possible, unless the original design used a more refined analysis. The request to use a more refined method of analysis to rate the structure needs to include justification as to why a 1-D analysis is insufficient and requires prior written approval from the State Bridge Engineer. Note, that if the Rating Engineer includes diaphragms or cross frames in their more refined method of analysis model, they are to be considered primary members and shall be rated.



7.2.2.5 For curved girder bridges, a more refined analysis is required, such as 2-D or 3-D. This analysis shall include the diaphragms or cross frames, and these elements shall also be rated.

7.2.2.6 For concrete, stone, and masonry arches, at a minimum, the crown, springlines and quarter points shall be rated.

7.2.2.7 Bridge Decks. Reinforced concrete decks and exodermic bridge decks supported by girders or floorbeams do not require load ratings unless their condition warrants investigation. If the Rating Engineer considers that the deck should be rated based upon condition or other concerns, he/she shall consult with the Bridge Section regarding the potential inclusion of the deck rating in their proposal.

In the event the deck needs to be rated, the Rating Engineer shall check punching shear under wheel loads and not check flexure, as discussed in *AASHTO Manual for Bridge Evaluation*, Article C6.1.5.1.

Timber decks require a load rating.

Vaulted sidewalks that have thin (less than 5½") deck slabs shall require a punching shear check.

Metal grid decks do not require a load rating, but purlins supporting the metal grid decking shall be rated.

Rating alternative deck types (i.e. orthotropic, sandwich-plate, FRP, etc.) will be considered on a case-by-case basis and shall be discussed with the Bridge Section prior to developing a scope and fee for the rating.

7.2.2.8 Bolted or field welded splices for steel rolled shapes, built up members, or welded plate girders shall not be rated unless their condition warrants investigation. If the Rating Engineer considers that the splices should be rated, based upon condition, he/she shall consult with the Bridge Section regarding the potential inclusion or addition of the splice ratings in the scope.

7.2.2.9 Alternate Load Path. An Alternate Load Path is the path that an applied load can take through other structural members to bypass a primary member that has little or no load carrying capacity. An Alternate Load Path allows a structure to continue to function without a failure, albeit perhaps in a reduced capacity. An example would be a deck that spans over a primary load path beam with a zero-ton rating, thereby transferring the wheel load to the adjacent, sound beams. For bridges which may require posting, the Rating Engineer shall consider and define all structurally feasible alternate load paths and rate the members that make up these alternate load paths to determine if they produce a higher overall bridge rating than the one based on the rating of the primary load carrying member(s). Prior to undertaking the rating of alternate load path members, the Rating Engineer shall consult with the Bridge Section and obtain concurrence that these load paths are viable.

### 7.2.3 Dead Loads

7.2.3.1 If a material unit weight is not known, Table 3.5.1-1 of the *AASHTO LRFD Bridge Design Specifications* shall be used for guidance.

7.2.3.2 For stringer bridges, dead loads and superimposed dead loads shall be distributed based on provisions of Subsection 3.5.3 of this Bridge Manual. The wearing surface shall be distributed equally to all beams in the cross section. For simplicity, and in order to keep the dead load moment diagram symmetrical, interior diaphragms shall be distributed as an equivalent uniform load over the length of the stringer. Fully and partially encased concrete end diaphragms shall be applied as point loads if, in the opinion of the Rating Engineer, this will affect the rating.

7.2.3.3 For NEXT F and D Beams, dead loads and superimposed dead loads shall be distributed based on the provisions of Paragraph 3.5.4.2 of this Bridge Manual.

7.2.3.4 For adjacent beam prestressed deck and box beam systems with a composite concrete slab, dead loads and superimposed dead loads shall be distributed based on the provisions of Subsection 3.8.2 of this Bridge Manual.

7.2.3.5B When analyzing adjacent prestressed deck and box beam systems without a composite concrete slab whose shear keys are intact and functioning, all superimposed dead loads shall be distributed as outlined in Subsection 3.8.2 of this Bridge Manual.

When the shear keys have failed, the Rating Engineer shall distribute the dead loads consistent with the way the bridge is performing, assuming no transfer of load across the failed keys.

7.2.3.6B For concrete slab bridges, the distribution of superimposed dead loads shall be determined after careful review of the plans.

If the slab has consistent reinforcing throughout the cross section, the superimposed dead loads (safety curb, sidewalk, and bridge barrier) shall be distributed equally across the entire bridge cross section. If a portion of the slab supporting the sidewalk/bridge barrier or safety curb has an increased section or increased reinforcing, 60% of the superimposed sidewalk/bridge barrier or safety curb dead loads shall be carried by this portion of the slab and the remaining 40% of these superimposed dead loads shall be carried by the remainder of the slab.

For concrete slab bridges the wearing surface shall be distributed to the entire bridge cross section.

7.2.3.7 For truss-floorbeam-stringer or girder-floorbeam-stringer system bridges all dead loads shall be distributed to floorbeams and trusses (or girders) as end reactions of the stringer or floorbeams using statics. The dead load distribution methods used for longitudinal multi-stringer bridges do not apply to these systems.

## 7.2.4 Live Loads

7.2.4.1A **HL-93 Design Load** is the LRFD Design Live Load as per Appendix C6A of the *AASHTO Manual for Bridge Evaluation* and shall be analyzed to determine a rating factor.

**Rating Vehicles** shall be as follows:

H20 truck	Two Axle	20 Tons
Type 3 truck	Three Axle	25 Tons
Type 3S2 truck	Five Axle	36 Tons
SU4 <sup>1</sup>	Four Axle	27 Tons
SU5 <sup>1</sup>	Five Axle	31 Tons
SU6 <sup>1</sup>	Six Axle	34.75 Tons
SU7 <sup>1</sup>	Seven Axle	38.75 Tons
Type EV2 <sup>2</sup>	Two Axle	28.75 Tons
Type EV3 <sup>2</sup>	Three Axle	43 Tons

Please note that MassDOT defines **Posting Vehicles** as trucks whose load ratings are used when a bridge is posted. MassDOT currently uses the following posting trucks for posting purposes at Inventory Level:

H20 truck	Two Axle	20 Tons
Type 3 truck	Three Axle	25 Tons
Type 3S2 truck	Five Axle	36 Tons

*Note 1: NCHRP Report 575 investigated the current truck configurations operating nationwide and determined that the AASHTO Legal Loads underestimate the load effects of the actual Specialized Hauling Vehicles (SHVs) currently operating in most states. In 2005, AASHTO adopted the SU4, SU5, SU6, and SU7 truck models which are intended to capture the effects of these SHVs.*

*Note 2: Type EV2 and Type EV3 have been added to the Rating Vehicles as a result of the implementation of Fixing America's Surface Transportation Act (FAST Act) signed into law by the President on December 4, 2015. This act provided an exemption for emergency vehicles from the nationwide Interstate truck weight limits set forth in 23 U.S.C. 127(a). This requirement applies to all bridges within reasonable access to the Interstate System.*

MassDOT has chosen to rate the interior beams of all bridges for the effects of Fast Act Emergency Vehicle loadings. The Rating Engineer may need to consider the first interior roadway beam and exterior safety curb beams depending upon the actual roadway lane striping. Additionally, superstructure members supporting these beams (e.g. floorbeams, trusses, etc.) will need to be rated for these vehicles.

7.2.4.1B **Rating Vehicles** shall be as follows:

H20 truck	Two Axle	20 Tons
Type 3 truck	Three Axle	25 Tons
Type 3S2 truck	Five Axle	36 Tons
HS20 truck	Three Axle	36 Tons
SU4 <sup>1</sup>	Four Axle	27 Tons
SU5 <sup>1</sup>	Five Axle	31 Tons
SU6 <sup>1</sup>	Six Axle	34.75 Tons
SU7 <sup>1</sup>	Seven Axle	38.75 Tons
Type EV2 <sup>2</sup>	Two Axle	28.75 Tons
Type EV3 <sup>2</sup>	Three Axle	43 Tons

Please note that MassDOT defines **Posting Vehicles** as trucks whose load ratings are used when a bridge is posted. MassDOT currently uses the following posting trucks for posting purposes at Inventory Level:

H20 truck	Two Axle	20 Tons
Type 3 truck	Three Axle	25 Tons
Type 3S2 truck	Five Axle	36 Tons

*Note 1: NCHRP Report 575 investigated the current truck configurations operating nationwide and determined that the AASHTO Legal Loads underestimate the load effects of the actual Specialized Hauling Vehicles (SHVs) currently operating in most states. In 2005, AASHTO adopted the SU4, SU5, SU6, and SU7 truck models which are intended to capture the effects of these SHVs.*

*Note 2: Type EV2 and Type EV3 have been added to the Rating Vehicles as a result of the implementation of Fixing America's Surface Transportation Act (FAST Act) signed into law by the President on December 4, 2015. This act provided an exemption for emergency vehicles from the nationwide Interstate truck weight limits set forth in 23 U.S.C. 127(a). This requirement applies to all bridges within reasonable access to the Interstate System.*

MassDOT has chosen to rate the interior beams of all bridges for the effects of Fast Act Emergency Vehicle loadings. The Rating Engineer may need to consider the first interior roadway beam and exterior safety curb beams depending upon the actual roadway lane striping. Additionally, superstructure members supporting these beams (e.g. floorbeams, trusses, etc.) will need to be rated for these vehicles.

7.2.4.2A Bridges shall be rated for Inventory and Operating Level with the HL-93 design live load, as defined by Part A of the *AASHTO Manual for Bridge Evaluation*. The resulting rating factors for roadway beams shall be specified on the Summary of Bridge Rating sheet in the spaces provided for Item 64 and Item 66. Sidewalk beam rating factors shall not be reported **in the Summary**.

These bridges shall be rated for the **H20, Type 3, Type 3S2, SU4, SU5, SU6, and SU7** vehicles outlined above. The ratings and the corresponding gross tonnage for each of these vehicles shall be reported at both the Inventory and Operating Level for the **Limit States** contained in **Table B6A-1** of the *AASHTO Manual for Bridge Evaluation*, except that the **Fatigue Load** limit state shall not be evaluated. The Load Factors, both dead and live load, for all vehicles shall be the Inventory and

Operating factors listed for the Design Load. However, for limit states other than Strength I only report values if the rating factor is less than 1.0.

7.2.4.2B Bridges shall be rated based on the method used for design. For most bridges the ratings will be performed using Allowable Stress Methods. There are existing bridges designed and constructed during the Central Artery timeframe that were designed using Load Factor Method. These bridges shall be rated using the Load Factor Method.

These bridges shall be rated for the H20, Type 3, Type 3S2, HS20, SU4, SU5, SU6, and SU7 vehicles outlined above. The ratings and the corresponding gross tonnage for each of these vehicles shall be reported at both the Inventory and Operating Level.

The MS18 gross tonnage for roadway beams, as specified in Paragraph 7.1.7.2B shall be specified on the Summary of Bridge Rating sheet in the spaces provided for Item 64 and Item 66. Sidewalk beam gross tonnage shall not be reported in the Summary.

Both Inventory and Operating Ratings shall be calculated for the Rating Vehicles outlined above. In general, lane loadings shall not be used for the H20 and HS20 vehicles when the span length is less than 200 feet. However, if a component of a structure is rated for the H vehicle, and the rating is determined to be 12 tons or less, this component must also be rated using the lane loading.

The above 12-ton limitation is based upon the 1978 *AASHTO Manual for Maintenance Inspection of Bridges*, which states in 5.2.2 “The probability of having a series of closely spaced vehicles of the maximum allowed weight becomes greater as the maximum allowed weight for each unit becomes less. That is, it is more likely to have a train of light-weight vehicles than it is to have a train of heavy-weight vehicles.”

For spans greater than 200 feet in length all vehicles other than the H20 and HS20 vehicles shall be spaced with a clear distance between them to simulate a train of vehicles in one lane and a single vehicle load shall be applied in the adjacent lane(s). The truck train axle load intensities for vehicles other than the H20 and HS20 vehicles shall be 75% for truck 1, 100% for truck 2, and 75% for trucks 3 and 4 for each repeated 4-truck train (*AASHTO Standard Specifications for Highway Bridges*, Appendix B). Truck train loading shall be used in all spans of continuous span bridges where at least one span is greater than 200 feet in length.

For bridges composed of adjacent precast beams, including prestressed deck slabs and box beams, with functioning shear keys, with or without a composite concrete slab, the equations from Article 3.23.4 of the *AASHTO Standard Specifications for Highway Bridges* shall be superseded by the following equations for live load bending moment distribution from the 13<sup>th</sup> Edition of the *AASHTO Standard Specifications for Highway Bridges*. In calculating the bending moments no longitudinal distribution of wheel load shall be assumed.

Load Fraction = S/D

Where:  $S = \frac{12N_l + 9}{N_g}$

For  $C \leq 3$   $D = 5 + \frac{N_l}{10} + \left(3 - \frac{2N_l}{7}\right) \left(1 - \frac{C}{3}\right)^2$

For  $C > 3$   $D = 5 + \frac{N_l}{10}$

Where:

$N_l$	=	Number of traffic lanes. Note that this number may vary from 1 to the total number of lanes to allow for calculation of the Force Effect due to Adjacent Vehicle
$N_g$	=	Total number of longitudinal beams
$C$	=	$K(W/L)$ , a stiffness parameter
$W$	=	Overall width of the bridge
$L$	=	Span length, feet

Values of  $K$  to be used in  $C = K(W/L)$ :

Bridge Type	Beam Type and Deck Material	$K$
Multi-Beam	Nonvoided rectangular beams	0.7
	Rectangular beams with circular voids	0.8
	Box section beams	1.0
	Channel Beams	2.2

7.2.4.3A The Type EV2 and Type EV3 shall be rated and the corresponding gross tonnage for each of these vehicles shall be reported at the Strength I Limit State for Operating Level only, using the load factors for dead loads contained in Table B6A-1 of the *AASHTO Manual for Bridge Evaluation* and a load factor of 1.3 for live load as advised by FHWA. The live load distribution factor shall be the One Design Lane Loaded factor from the *AASHTO LRFD Bridge Design Specifications* with the built-in multiple presence factor of 1.2 divided out.

Interior beams shall be rated with the Type EV2 or Type EV3 in one lane, and a Type 3S2 vehicle in an adjacent lane(s). The Type 3S2 vehicle is the only adjacent Rating Vehicle that needs to be considered.

When using BrR to determine the rating for the Type EV2 and Type EV3 vehicles, the rating vehicle shall be defined as a Permit Load Rating and the Type 3S2 shall be defined as the Adjacent Vehicle. Under the Advanced Vehicle Properties, check “override” and input 1.3 for the Permit Live Load Factor. Additionally, the Adjacent Vehicle Live Load Factor shall be set as 1.3.

When not using BrR, use the modified *AASHTO LRFD Bridge Design Specifications* Article 4.6.2.2.5 equations below to determine the force effect on the structural member being rated for the Type EV2 or EV3 and Type 3S2 adjacent vehicle.

$$LL = G_{EV} * \frac{g_1}{Z}$$

$$AdjLL = G_{ADJ} * \left( g_m - \frac{g_1}{Z} \right)$$

Where:

$LL$	=	Final Force Effect due to Rating Vehicle Live Load (EV2 or EV3) to be applied in rating equation
$G_{EV}$	=	Force Effect due to Emergency Vehicle
$g_1$	=	Single lane live load distribution factor
$AdjLL$	=	Force Effect due to Adjacent Vehicle (Type 3S2) to be applied in

		rating equation
$G_{ADJ}$	=	Force Effect due to Adjacent Vehicle (Type 3S2)
$g_m$	=	Multiple lane live load distribution factor
$Z$	=	A factor taken as 1.20 where the lever rule was not utilized, and 1.0 where the lever rule was used for a single lane live load distribution factor

In all cases the Rating Factor for the Type EV2 and EV3 vehicles shall be determined using the following formula:

$$RF = \frac{(C - \gamma_{DC} * DL - \gamma_{DW} * DW - \gamma_{ADJ} * AdjLL)}{\gamma_{LL} * LL}$$

Where:

$C$	=	Capacity
$\gamma_{DC}$	=	Load Factor for components and attachments
$DL$	=	Force Effect due to components and attachments
$\gamma_{DW}$	=	Load Factor for wearing surfaces and utilities
$DW$	=	Force Effect due to wearing surfaces and utilities
$\gamma_{ADJ}$	=	Load Factor for Adjacent Vehicle = 1.3
$AdjLL$	=	Force Effect due to Adjacent Vehicle
$\gamma_{LL}$	=	Load Factor for Rating Vehicle = 1.3
$LL$	=	Force Effect due to Rating Vehicle Live Load

7.2.4.3B The Type EV2 and Type EV3 shall be rated and the corresponding gross tonnage for each of these vehicles shall be reported at the Operating Level only. If the Load Factor Method is required, the Operating Level shall be obtained by using the load factor for live load ( $\beta_L$  or A2) equal to 1.30. The live load distribution factor shall be the “Bridge Designed for One Traffic Lane” taken from the *AASHTO Standard Specifications for Highway Bridges*.

Interior beams shall be rated with the Type EV2 or Type EV3 in one lane, and a Type 3S2 vehicle in an adjacent lane(s). The Type 3S2 vehicle is the only adjacent Rating Vehicle that needs to be considered.

When using BrR to determine the rating for the Type EV2 and EV3 vehicles, the rating vehicle shall be defined as Permit Operating and the Type 3S2 shall be defined as the Adjacent Vehicle. Under the Advanced Vehicle Properties, the Adjacent vehicle live load factor shall be set as 1.0 for an Allowable Stress Rating and 1.3 for a Load Factor Rating. Under the Live Load Distribution tab for each Member Alternative check the box for “Allow Distribution factors to be used to compute effects of permit loads with routine traffic”.

When not using BrR, use *AASHTO Standard Specifications for Highway Bridges* Table 3.23.1 to calculate the live load distribution factors for a Bridge Designed for One Traffic Lane and Bridge Designed for Two or more Traffic Lanes. The Live Load Distribution Factor for the adjacent vehicle shall be the difference between these two live load distribution factors. The live load distribution factor for the Type EV2 and EV3 vehicles shall be that for a Bridge Designed for One Traffic Lane.



$$LL = G_{EV} * g_1$$

$$AdjLL = G_{ADJ} * (g_m - g_1)$$

LL	=	Final Force Effect due to Rating Vehicle Live Load (EV2 or EV3) to be applied in rating equation
$G_{EV}$	=	Force Effect due to Emergency Vehicle
$g_1$	=	Live load distribution factor for Bridge Designed for One Traffic Lane
AdjLL	=	Force Effect due to Adjacent Vehicle (Type 3S2) to be applied in rating equation
$G_{ADJ}$	=	Force Effect due to Adjacent Vehicle (Type 3S2)
$g_m$	=	Live load distribution factor for Bridge Designed for Two or more Traffic Lanes

In all cases the Rating Factor for the Type EV2 and EV3 vehicles shall be determined using the following formula:

$$RF = \frac{(C - A1 * (DC + DW) - A3 * AdjLL)}{A2 * LL}$$

Where:

C	=	Capacity
A1	=	Dead Load Factor
DC	=	Force Effect due to Stage 1 Dead Load
DW	=	Force Effect due to Stage 2 Dead Load
A3	=	Adjacent Vehicle Live Load Factor
	=	1.0 for Allowable Stress Rating
	=	1.3 for Load Factor Rating
AdjLL	=	Force Effect due to Adjacent Vehicle
A2	=	Live Load Factor
	=	1.0 for Allowable Stress Rating
	=	1.3 for Load Factor Rating
LL	=	Force Effect due to Rating Vehicle Live Load

7.2.4.4A Live load distribution factors for interior and exterior beams shall be calculated in accordance with Chapter 3 of this Bridge Manual and Section 4 of the latest edition of the *AASHTO LRFD Bridge Design Specifications* including all Interims. Skew correction factors shall be included. The provisions of Paragraph 7.2.4.5 below shall apply if need be. The Rating Engineer shall provide calculations for Live Load Distribution Factors which shall be summarized in a table in Appendix C. BrR alone shall not be used to calculate distribution factors unless the values calculated by BrR match those independently calculated by the Rating Engineer.

7.2.4.4B Live load distribution factors for interior beams shall be calculated in accordance with Section 3 of the *AASHTO Standard Specifications for Highway Bridges*. For exterior beams, use lever rule with the wheel line located 2 feet from the face of the curb and ignore the provisions of Article 3.23.2.3.1.5. However, the provisions of Paragraph 7.2.4.5 below shall apply if need be. The Rating Engineer shall provide calculations for Live Load Distribution Factors which shall be summarized in a table in Appendix C. BrR alone shall not be used to calculate distribution factors unless the values calculated by BrR match those independently calculated by the Rating Engineer.

7.2.4.5 In the event that the exterior or first interior beam rates below statutory, the Rating Engineer shall use an alternative method of distributing the truck load by using the actual travel lanes on the bridge for the placement of the truck, as specified in Articles 6A.2.3.2 and 6B.6.2.2 of the latest edition of the *AASHTO Manual for Bridge Evaluation*. A wheel line of the truck may be placed directly on the outside stripe of the actual travel lane (which shall be field-verified by the Rating Engineer), but no closer than 2 feet to the face of the curb. The live load distribution factor shall be calculated using lever rule with Multiple Presence Factor applied.

The rating value for the exterior beam or first interior obtained by using this alternate method of live load distribution and identified as “Alternative Load Rating using Actual Lane location”, shall be reported in the Breakdown of Bridge Rating of the Bridge Rating report alongside the value obtained by using procedures of Paragraphs 7.2.4.4A and 7.2.4.4B above. However, the higher value shall be reported as the controlling ratings and provided in the Summary of Bridge Rating.

7.2.4.6A Dynamic Load Allowance shall apply to all trucks used in the development of the load rating. Reductions of the Dynamic Load Allowance shall not be permitted, except as follows.

The Dynamic Load Allowance for concrete arches, rigid frames or slabs that have cover greater than 12 inches, shall be calculated in accordance with the *AASHTO LRFD Bridge Design Specifications*, Article 3.6.2.2.

Dynamic Load Allowance need not be applied to wood components per the *AASHTO LRFD Bridge Design Specifications*, Article 3.6.2.3.

7.2.4.6B The Live Load Impact Factor shall apply to all trucks used in the development of the load rating. Reduction of the Live Load Impact Factor shall not be permitted in determining the safe load carrying capacity of the structure except as follows.

The Impact Factor for concrete arches, rigid frames, or slabs that have greater than 12 inches of fill, shall be applied in accordance with the *AASHTO Standard Specifications for Highway Bridges*, Article 3.8.2.3.

Impact Factor need not be applied to timber components per the *AASHTO Standard Specifications for Highway Bridges*, Article 3.8.1.2.

7.2.4.7 Curb heights greater than or equal to 12 inches shall be considered non-mountable. If a bridge has a non-mountable sidewalk, median, or safety walk that has a width of 6 feet or greater, then the girder supporting that feature shall be rated at the Operating Level for special snow removal equipment using the appropriate load factor, where applicable.

The snow removal equipment shall be assumed to have 2 axles with 2 wheels per axle. The total weight of the snow removal equipment shall be 4 tons (unfactored), divided equally between the 4 wheels, with each wheel load evenly distributed over a tire contact area that is 8 inches wide and 3 inches long. The wheelbase shall be 4 feet and the wheel lines shall be 5 feet apart. The outer wheel line shall be located no closer than 12 inches from the face of railing. The Operating Rating of the supporting members shall be reported in the Breakdown of Bridge Rating and omitted from the Summary of the Bridge Rating.

7.2.4.8 Curbs with height less than 12 inches shall be considered mountable. The beams supporting a mountable sidewalk, mountable median, or mountable safety walk with a width greater than 2 feet measured from the face of the bridge rail to the curb line shall be rated by placing a wheel line 2 feet from the face of the bridge rail. If the above referenced width is 2 feet or less, the wheel line shall be placed 2 feet from the face of the curb. This rating shall be performed at the Operating Level. The Inventory Rating shall always be calculated with the wheel line located in the travelway 2 feet from the face of the curb. Refer to Paragraph 7.2.4.5 for Alternative Load Rating using Actual Lane Location procedures. Refer to Chapter 3, Paragraph 3.5.3.11, Case II for guidance regarding the application of the HL-93 loading for this situation.

7.2.4.9 Pedestrian Load will generally not be included in ratings, unless, based on engineering judgment, its application will produce the maximum anticipated loading. For structural members supporting both sidewalk loads and vehicular traffic, the probability is low for full loading on both the sidewalk and bridge; therefore, only Operating Ratings, including Pedestrian Load, need to be performed. This rating shall be reported in the Breakdown of Bridge Rating and omitted from the Summary of Bridge Rating.

## 7.2.5 Special Instructions for Load Ratings

7.2.5.1 Any request for clarification of, or deviation from, these guidelines must be submitted in writing (email is acceptable) to the State Bridge Engineer. Written responses will be provided.

7.2.5.2A Condition Factors of the *AASHTO Manual for Bridge Evaluation*, Article 6A.4.2.3 shall not be used in the calculations of the structural capacity. The structural capacity of the section being investigated shall be based on the field conditions.

7.2.5.3A System Factors of the *AASHTO Manual for Bridge Evaluation*, Article 6A.4.2.4 shall be included in the capacity calculations of the non-redundant structure for the section being investigated. Redundant secondary members within a non-redundant structure shall not have their capacities reduced by the same system factor. For example, a bridge comprised of two girders, floorbeams, and stringers shall use a system factor of 0.85 for the girders, 1.0 for the floorbeams, if they are spaced less than or equal to 12 feet, and 1.0 for stringers (refer to Chapter 3, Paragraph 3.6.1.6).

7.2.5.4 Pile bent structures constructed of steel piles, timber piles, or concrete piles, including their pile caps, shall be rated. Other non-reinforced concrete substructures, such as steel frames or substructures that include steel cross girder members, shall also be rated.

Typically, reinforced concrete substructures such as multi-column piers, single column hammerhead piers, solid wall piers and concrete abutments, do not need to be rated because they have sufficient capacity. However, in cases where these types of substructures have undergone deterioration in critical areas that has, in the opinion of the Rating Engineer, reduced their load carrying capacity significantly enough to influence the overall rating of the bridge, then the Rating Engineer shall consult with the MassDOT Ratings and Overload Engineer regarding the need for rating these substructures. This deterioration shall include deterioration of bridge seats and pedestals which has undermined the bridge bearings.

In either case, the report shall contain a statement noting the Rating Engineer's judgment with regards to the substructure.

7.2.5.5 Engineering judgment alone shall not be accepted as a valid method for rating superstructure elements. For structures with unknown structural detail and lack of plans, detailed field measurements, non-destructive testing, and a material testing program shall be performed.

For such situations, a program of material sampling and testing shall be developed and submitted to the State Bridge Engineer for approval prior to performing the testing. All material sampling and testing shall be performed in accordance with the latest ASTM and AASHTO Standards.

7.2.5.6 For structures without the necessary details, such as concrete slabs with unknown reinforcing size and spacing, and with difficult access for the taking of samples as required by Paragraph 7.2.5.5 above, the Rating Engineer shall contact the Bridge Section for guidance.

7.2.5.7 If a beam supporting a raised median rates below statutory levels, the Rating Engineer shall apply the provisions of Paragraph 7.2.4.5 above.

7.2.5.8B All timber structures shall be rated using the Allowable Stress Design methodology. Where the actual species and grade of lumber are unknown, the Rating Engineer shall determine the species and grade by field observation and/or testing.

The Allowable Inventory Stresses for various timber species and grades and the appropriate adjustment factors shall be taken from Section 10 of the AASHTO LRFD Bridge Design Specifications. The values used for Allowable Operating Unit Stresses shall be equal to 1.33 times the values determined for the Allowable Inventory Unit Stresses.

7.2.5.9 Tire Contact Area Dimensions. The Tire Contact Area for a given rating vehicle wheel shall be calculated by dividing the reaction of the wheel by an assumed tire pressure of 80 psi. The length of this Tire Contact Area shall be taken as 10" for all vehicle wheels and the width shall be calculated by dividing the calculated Tire Contact Area by this width.

7.2.5.10 BrR can only model parabolic and linear varying web depths for reinforced concrete T-beam superstructures. If a beam's web depth varies along a circular curve, the concrete T-beams can only be modeled in BrR using cross sections and cross-sectional ranges with linear varying web depths.

7.2.5.11 Unless there is a mix formula or design strength given on the plans, concrete for superstructures shall be assumed to have an  $f'_c$  equal to 2000 psi for structures built prior to 1931; 3000 psi for structures built between 1931 and 1984; and 4000 psi for structures built after 1984. If a mix proportion is given on the plans, the compressive strengths shall be taken from the 1916 Joint Committee Report as shown in the following Table.

Mix	1:1:2	1:1½:3	1:2:4	1:2½:5	1:3:6
$f'_c$	3000 psi	2500 psi	2000 psi	1600 psi	1300 psi

7.2.5.12 Unless otherwise shown plans, the following be used to determine prestressed concrete strengths,  $f'_c$ :

	Prior to 1956	1956 - 1985	1985 - 2005 (US Customary Unit projects)	After 1995 (Metric Unit projects)	2005 - Present
$f'_c$	4000 psi	5000 psi	6000 psi	45 MPa (6526 psi)	6500 psi

In addition, starting with the 2005 Bridge Manual, the use of concrete strengths up to 8000 psi was allowed if approved by the State Bridge Engineer.

7.2.5.13 Unless otherwise shown on the plans, the prestressing strands for prestressed concrete beams shall be assumed to be as follows:

Prior to 1957: High tensile strength wire or high tensile strength seven wire strand.  
 1957 to 1987: ASTM A 416 Uncoated Seven-Wire Stress Relieved strands.  
 After 1987: AASHTO M203 (ASTM A 416) Uncoated Seven-Wire Stress Relieved Low Relaxation (Lo-Lax) strands.

	Prior to 1957 Wire	Prior to 1957 7 Wire Strand	1957 - 1970	1970 - 1987	After 1987
Ultimate Strength	236 ksi	250 ksi	250 ksi	270 ksi	270 ksi

## 7.2.6 Special Instructions for Load Ratings of Prestressed Concrete Members including Adjacent Prestressed Concrete Beams

7.2.6.1 Unless there is physical evidence that the grouted keyway(s) between adjacent prestressed concrete beams are not transferring shear, all loads applied to the adjacent beam bridge cross section shall be distributed assuming the beams function together as a unit.

7.2.6.2 The Allowable Tensile and Compressive Stresses at Inventory Stress Levels for prestressed concrete members shall be calculated using the formulas presented in the *AASHTO Manual for Bridge Evaluation*, Article 6B.5.3.3. The formulas for the prestressing steel Allowable Tension Stress rating presented in this Article need not normally be checked for either the Inventory or Operating Stress Levels. The only situation these rating values might control a rating would be in the unlikely case of very lightly prestressed members. All Allowable Tensile Stress values and Allowable Compressive Stress values used in the preparation of the rating report must be clearly stated in the Rating Analysis Assumptions and Criteria section of the rating report.

The *AASHTO Manual for Bridge Evaluation* provides one set of rating factor formulas for the rating of prestressed concrete members that consider both strength and serviceability together. Therefore, when calculating either Load Factor or Allowable Stress Ratings of prestressed concrete members, the flexural and shear strength rating factors for both Inventory and Operating Levels shall be obtained using these formulas as specified in Article 6B.5.3.3 of the *AASHTO Manual for Bridge*

*Evaluation.* The rating factor formulas make no provisions for serviceability for Operating Ratings and thus serviceability ratings values need not be calculated.

**7.2.6.3B** For prestressed girders where the nominal moment capacity is less than  $1.2M_{cr}$ , the nominal capacity shall be reduced by “ $k$ ”. The value “ $k$ ” shall be calculated per the *AASHTO Manual for Bridge Evaluation*, Article 6B.5.3.3.

## **7.2.7 Special Instructions for Load Ratings of Stone Masonry Arches**

**7.2.7.1** The *AASHTO Manual for Bridge Evaluation*, Article 6A.9.1 states that unreinforced stone masonry arches should be evaluated by the Allowable Stress Method. An acceptable method of analysis is outlined below.

**7.2.7.2B** The arch shall be modeled using a series of prismatic two-noded beam elements, with the loads applied at each node or as linearly varying loads to each element. A minimum of 10 straight beam elements or 1 straight beam element per 4 feet of clear span, whichever results in the most elements, shall be used. Each element shall be of equal arc length. The node locations shall correspond to the mid-depth points of the arch segments. The arch geometry used in the analysis shall be determined using either a parabolic, circular, elliptical, or fifth order polynomial curve that achieves the best fit with the actual arch. Field measurement and confirmation of the arch geometry is critical. Assuming an arbitrary geometry is not acceptable since it may result in inaccurate results.

**7.2.7.3B** Vertical dead loads shall be calculated along the horizontal length of each element and shall be applied as linearly varying loads to each element. The height of fill shall be computed from the extrados to the bottom of the wearing surface.

**7.2.7.4B** The dead load of sidewalks, wearing surfaces, railings, curbs, and spandrel walls shall be computed and equally distributed across the width of the arch. In some cases, the spandrel wall can function as an independent member capable of supporting its self-weight and perhaps a portion of the arch. However, the ability of a spandrel wall to support itself and a portion of the arch is uncertain and shall be neglected in the analysis.

**7.2.7.5B** The horizontal earth pressure loads shall be calculated assuming a lateral earth pressure coefficient of 0.25. The loads shall be computed along the vertical heights of each element and shall be applied as linearly varying loads to each element.

**7.2.7.6B** Load ratings of stone masonry arches need not consider thermal effects.

**7.2.7.7B** Unit loads shall be applied to each node in the model to generate influence coefficient tables and lines for moment, shear, and axial load at given nodes. Extreme care shall be exercised to ensure that proper sign convention is maintained. From these influence lines, the maximum moment and corresponding shear and axial loads shall be calculated. At a minimum, influence lines shall be developed at the springlines, crown, quarter points, and at points where significant changes in section properties occur.

**7.2.7.8B** Live loads shall be positioned in such a way so as to maximize the moment at each node. It may be helpful to superimpose a transparent wheel load pressure umbrella over a scaled

longitudinal section that depicts the wearing surface and arch extrados. The objective is to load those elements so that live load moment shall be maximized at nodes of interest.

**7.2.7.9B** In the load rating of stone masonry arches, the maximum eccentricity shall be calculated in order to determine the critical node locations. The eccentricities shall be calculated by dividing the combined dead and live load moments by the combined dead and live load thrusts.

**7.2.7.10B** In the load rating of stone masonry arches, the concept of a "kern" or middle third section is used to determine whether any portion of the masonry is in tension. The kern points are located above and below the neutral axis of the arch at a distance  $r^2/c$ , where "r" is the radius of gyration and "c" is the distance from the neutral axis to the extreme fiber.

In cases where the combined dead and live load thrust falls outside the kern points, resulting in tension in the masonry, a pressure wedge analysis shall be used to calculate the maximum compressive stress. The portion of the arch masonry in tension shall be effectively ignored by redistributing the pressure over a smaller depth.

If the eccentricity (e) of the combined thrust is located below the bottom kern point, the maximum compressive stress shall be determined as follows:

$$f_t = 0 \text{ (no tension assumed at top of masonry)}$$
$$f_b = (P/A)(d/c) = (P/A)(d/(d/2)) = 2P/A$$

Where:

$$A = 3(d/2 - e)(\text{Unit Width})$$
$$d = \text{Depth of Arch Section}$$
$$e = \text{Combined Moment/Combined Thrust}$$

If the eccentricity (e) of the combined thrust is located above the top kern point, the maximum compressive stress shall be similarly determined as follows:

$$f_t = (P/A)(d/c) = (P/A)(d/(d/2)) = 2P/A$$
$$f_b = 0 \text{ (no tension assumed at bottom of masonry)}$$

If the eccentricity (e) of the combined thrust is located between the kern points, the maximum compressive stress shall be determined as follows:

$$f_b \text{ or } f_t = (P/A)(1 + 6e/d)$$

Where:


$$A = \text{Cross sectional area}$$
$$d = \text{Depth of Arch Section}$$

**7.2.7.11B** The Inventory Allowable Compressive Stresses for stone masonry shall be determined in accordance with Article 6B.5.2.6 of the *AASHTO Manual for Bridge Evaluation*. Professional



judgment based upon field observations and testing is pivotal to the proper determination of Inventory Allowable Compressive Stresses for stone masonry. Based upon the Rating Engineer's judgment, Allowable Compressive Stresses may be lowered for low quality masonry, or raised, if justified by testing of samples taken from the bridge. Ratings for stone masonry arches shall only be provided at the Inventory Stress Level. Report the same values for Items 64 and 66.

7.2.7.12 Since the applied loading to the arch affects the eccentricities of the element compression forces, an iterative process must be used to determine the load ratings. It is not permissible to simply use the rating factor that is calculated from the applied Rating Vehicle loadings and multiply it by the vehicle tonnage. This iterative process shall be used for rating factors above and below 1.0 for all Rating Vehicles. The following procedure shall be used to develop the ratings for the arch:

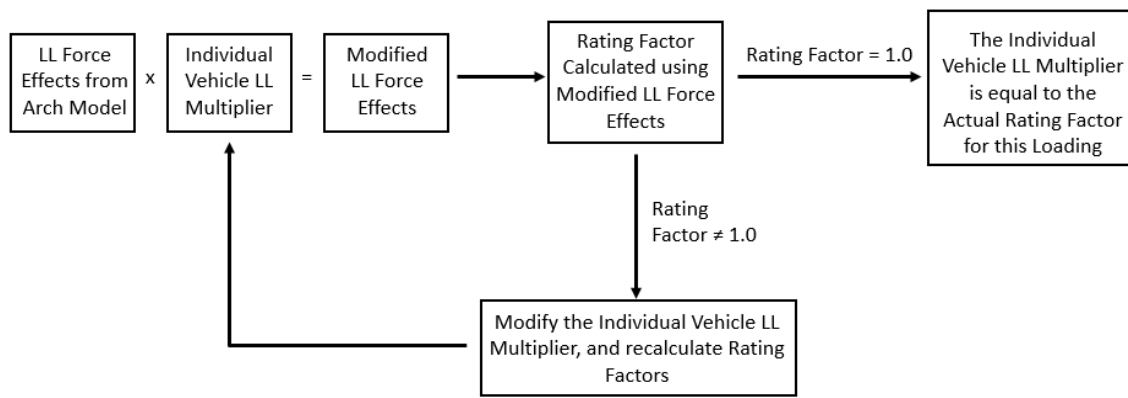

1. Analyze the arch for the Rating Vehicles to obtain dead and live load effects used to rate the arch.
2. Perform a preliminary load rating per the steps outlined above. Rating factors not equal to 1.0 will need to be refined to determine the gross tonnage for the structure.
3. Create a "live load effect multiplier" specific for each vehicle which will factor the live load axial forces and bending moments prior to re-rating the arch elements (dead loads will not be modified).  
Increase or decrease the live load effect multipliers individually for each vehicle until the rating factors equal 1.0. When this is achieved, the load effect multiplier will be equal to the actual rating factor of the arch for that vehicle.

## 7.2.8 Special Instructions for Load Rating of Reinforced Concrete Arches

7.2.8.1B The combined axial load and moment capacities of reinforced concrete arches shall be determined in accordance with Article 8.15 of the *AASHTO Standard Specifications for Highway Bridges*. Interaction diagrams for combined flexural and axial load capacities shall be produced, for reference see the *AASHTO Manual for Bridge Evaluation, Appendix G6A*. Inventory Capacities shall be obtained by using 35% of the capacities determined in accordance with Article 8.15.4 of the *AASHTO Standard Specifications for Highway Bridges*. Operating Capacities shall be obtained by using 50% of the capacities determined in accordance with this same Article.

7.2.8.2B The *AASHTO Manual for Bridge Evaluation*, states that environmental loads, in combination with dead and live load effects, shall be included at the Operating Level. Load ratings of

concrete arches with spans greater than 100 feet shall consider thermal loading at the Operating Level.


**7.2.8.3B** While load rating reinforced concrete arches, especially pre-engineered arches or frames, the Rating Engineer shall be aware that the design may have incorporated the soil/arch interaction to reduce the forces in the arch. This soil/arch interaction shall be considered in the development of the rating report.

## **7.2.9 Special Instructions for Load Rating of Corroded Steel Beam Webs**

**7.2.9.1** Corrosion of steel beam webs due to exposure to deicing chemicals is a very common problem that must be addressed in load ratings. This deterioration is typically located below leaking deck joints and consists of reduced web thicknesses and irregularly shaped web holes in advanced cases. This may result in web local yielding or web local crippling in beam ends. When web section losses within the bottom 4" of the web height equal or exceed an average of 1/8" over that height, the simplified methods presented in the following sections shall be used to establish load ratings.

Note that the following checks are supplemental ratings that are performed in addition to the typical limit states, in particular for shear. If a corroded beam needs to be rated according to this section, it is recommended that the shear rating for the beam also be included in the Breakdown of Bridge Rating, regardless of whether or not it controls the overall rating for the beam.

**7.2.9.2** Based on typically observed beam-end deterioration, as well as the anticipated failure mechanism, nominal capacities shall be determined based on the average remaining thickness of the web within the bottom 4" of the web height. Any holes shall be considered ineffective for the full 4" height. Engineering judgement shall be used in situations where advanced section loss occurs outside of

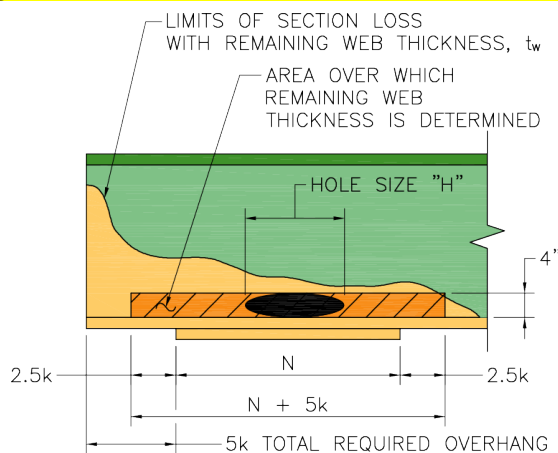

**Figure 7.2.9-1: End of Beam Elevation**

the 4" height.

Previous editions of this Bridge Manual included a check of the buckling capacity at beam ends where advanced corrosion had occurred. It was found that often this check was very conservative and not representative of the actual failure mechanism. This is typically the result of the presence of concrete

encased end diaphragms; localized corrosion along bottom of the web, rather than over the full height; conservative boundary conditions, ignoring that the web is supported along three sides; and neglecting the length of the bearing, among other factors. Therefore, this check has been deleted, however currently MassDOT is in the process of conducting additional research on the behavior of deteriorated beam ends.

For beam ends without bearing stiffeners, the average web thickness,  $t_{ave}$ , used for beam-end deterioration analysis at interior supports, or end supports with a beam overhang of at least 5k, shall be based on the equation below. If an overhang past the bearing of less than 5k is provided, then the "5k" term in the equation shall be substituted with "2.5k".

$$t_{ave} = \frac{(N + 5k - H) * t_w}{(N + 5k)}$$

Where:

$t_w$  = remaining web thickness (in.)

H = total length of hole(s) along length used for capacity within (N+5k or N+2.5k) (in.)

N = bearing length (in.)

k = distance from outer face of flange to toe of web fillet for a rolled shape, or toe of web to flange weld for a plate girder (in.)

When determining what section loss to apply to the beam for regular shear capacity (BrR input), a weighted average over the entire beam depth shall be used. For example, if the bottom half of a beam web has 50% section loss, the overall deterioration input will be 25%.

7.2.9.3 The nominal web local yielding/local crippling capacities for beam ends without bearing stiffeners shall be calculated using the following procedure. These methods follow the procedure outlined in Article D6.5 of the *AASHTO LRFD Bridge Design Specifications* using the equations from the 14<sup>th</sup> Edition of the *AISC Steel Construction Manual*, Sections J10.2 and J10.3.

The resistance factors for the LRFD method are as given in the *AASHTO LRFD Bridge Design Specifications*, whereas the Allowable Stress safety factors ( $\Omega$ ) are from the *AISC Steel Construction Manual* and are used for the Inventory level capacities. The Operating safety factor is taken as the Inventory safety factor multiplied by 55/75. For Load Factor Ratings the safety factors ( $\Omega$ ) are modified as described in Paragraph 7.2.9.4B.

The nominal web local yielding capacity in kips ( $R_{n,yield}$ ) shall be calculated as follows:

- At interior-pier reactions and beam end reactions where an overhang past the bearing of at least 5k is provided

$$R_{n,yield} = F_y t_{ave} (5k + N)$$

- At beam end reactions where an overhang of less than 5k is provided

$$R_{n,yield} = F_y t_{ave} (2.5k + N)$$

Where:

$F_y$  = minimum yield strength (ksi)

$t_{ave}$  = the average remaining thickness within the bottom 4" of the web height (in.)

$k$  = distance from outer face of flange to toe of web fillet for a rolled shape, or toe of web to flange weld for a plate girder (in.)

The web local crippling capacity in kips ( $R_{n,crip}$ ) shall be calculated as follows:

- At interior-pier reactions and for beam end reactions applied at a distance from the end of the member that is greater than or equal to  $d/2$

$$R_{n,crip} = 0.8 t_{ave}^2 \left[ 1 + 3 \left( \frac{(N-H)}{d} \right) \left( \frac{t_{ave}}{t_f} \right)^{1.5} \right] \sqrt{\frac{E F_y t_f}{t_{ave}}}$$

Otherwise:

$$R_{n,crip} = 0.4 t_{ave}^2 \left[ 1 + 3 \left( \frac{(N-H)}{d} \right) \left( \frac{t_{ave}}{t_f} \right)^{1.5} \right] \sqrt{\frac{E F_y t_f}{t_{ave}}}, \text{ when } N/d \leq 0.2$$

$$= 0.4 t_{ave}^2 \left[ 1 + \left( \frac{4(N-H)}{d} - 0.2 \right) \left( \frac{t_{ave}}{t_f} \right)^{1.5} \right] \sqrt{\frac{E F_y t_f}{t_{ave}}}, \text{ when } N/d > 0.2$$

Where:

$d$  = entire depth of steel section (in.), without deductions for encased diaphragms, if any

$t_f$  = actual thickness of the flange resisting the interior-pier or beam end reaction (in.)

$E$  = modulus of elasticity of steel (ksi)

7.2.9.4A The corroded web rating at both the Inventory and Operating levels shall be determined using the minimum of the factored resistances from the web local yielding and web local crippling checks as follows:

$$\text{Corroded Web Factored Resistance} = \text{Min} [\Phi R_{n,yield}, \Phi R_{n,crip}]$$

Where:

$$\Phi R_{n,yield} = (\Phi_b = 1.0)(R_{n,yield})$$

$$\Phi R_{n,crip} = (\Phi_w = 0.8)(R_{n,crip})$$

**Rating Factor:**

$$\text{LRFR Rating Factor} = \frac{\text{Corroded Web Factored Resistance} - DL_{rxn}}{(L+I)_{rxn}}$$

7.2.9.4B The corroded web rating at both the Inventory and Operating levels shall be determined using the minimum of the web local yielding and web local crippling checks as follows:

$$\text{Corroded Web Inventory Capacity} = \text{Min} [R_{\text{all,yield}}, R_{\text{all,crip}}]$$

$$\text{Corroded Web Operating Capacity} = (75/55) * \text{Min} [R_{\text{all,yield}}, R_{\text{all,crip}}]$$

For Allowable Stress Ratings:

$$R_{\text{all,yield}} = \left[ 1/(\Omega = 1.8) \right] (R_{n,\text{yield}})$$

$$R_{\text{all,crip}} = \left[ 1/(\Omega = 2.4) \right] (R_{n,\text{crip}})$$

For Load Factor Ratings:


$$R_{\text{all,yield}} = \left[ 1/(\Omega = 1.0) \right] (R_{n,\text{yield}})$$

$$R_{\text{all,crip}} = \left[ 1/(\Omega = 1.0) \right] (R_{n,\text{crip}})$$

$$\text{Rating Factor} = \frac{\text{Corroded Web Capacity} - DL_{rxn}}{(L+I)_{rxn}}$$

Note: For Load Factor Ratings, apply the appropriate load factors to  $DL_{rxn}$  and  $(L + I)_{rxn}$ .


7.2.9.5 For beam ends with bearing stiffeners, the web local yielding capacity ( $R_{\text{yield}}$ ) shall be calculated using the following *AASHTO LRFD Bridge Design Specifications* derived resistances. The effective column section of the web shall consist of all stiffener elements, as well as a strip of web of length  $N+5k$  (or  $N+2.5k$ ). The web thickness,  $t_w$ , used shall be based on the average remaining thickness, taking section loss into account but not decreased for hole length. This area is as shown below, for beam ends with one or two pairs of stiffeners:

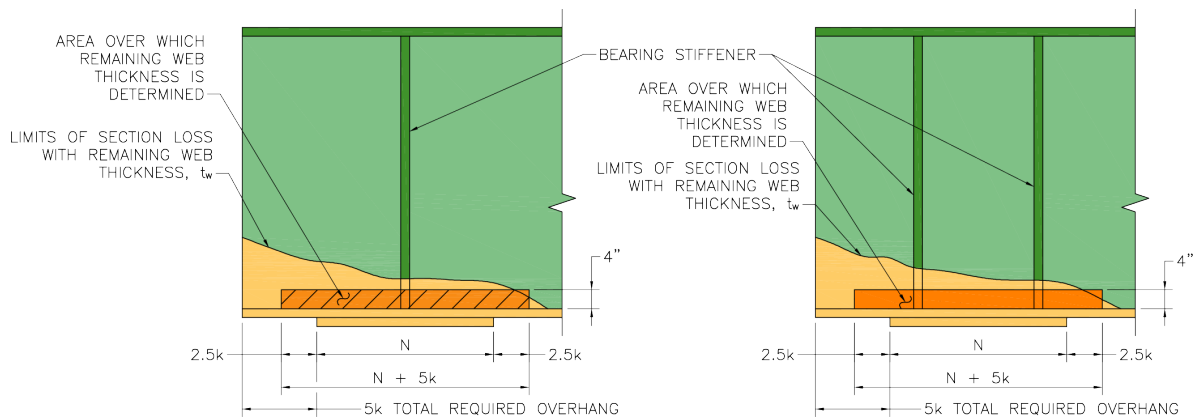

**Figure 7.2.9-2: End of Beam Elevation**

The gross area used in calculating the web yielding capacity shall be calculated based on the equation below. If the 5k required overhang is not provided, then the “5k” term shall be replaced with “2.5k”. Any holes shall be assumed to exist over the full 4” height.

$$A_g = t_{ave} \times (N + 5k) + \sum \text{Bearing Stiffener Areas} - \sum \text{Hole Areas}$$

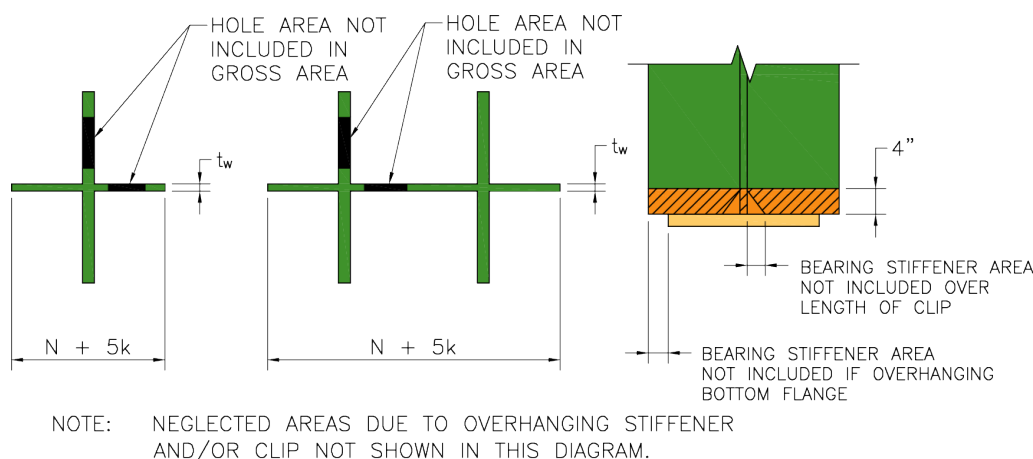

**Figure 7.2.9-3: End of Beam Plan and Section Views**

The bearing stiffener area used in the gross area equation above shall only include that area in actual contact with the bottom flange. For example, this area shall not include any portion of the bearing stiffener which is clipped at the web or overhanging the bottom flange.

7.2.9.6 The nominal web local yielding capacity for beam ends with bearing stiffeners shall be calculated using the following procedure.

The resistance factors for the LRFD method are as given in *AASHTO LRFD Bridge Design Specifications*, whereas the Allowable Stress safety factors ( $\Omega$ ) are from the *AISC Steel Construction Manual* and are used for the Inventory level capacities. The Operating safety factor is taken as the Inventory safety factor multiplied by 55/75. For Load Factor Ratings the safety factors ( $\Omega$ ) are modified as described in Paragraph 7.2.9.7B.

The nominal web local yielding capacity in kips ( $R_{n,yield}$ ) shall be calculated as follows:

$$R_{n,yield} = F_y A_g$$

Where:

$F_y$  = minimum yield strength (ksi)

$A_g$  = gross area remaining at bearing per Paragraph 7.2.9.5 (in<sup>2</sup>)

7.2.9.7A The corroded web rating at both the Inventory and Operating levels shall be determined as follows:

For Load and Resistance Factor Ratings:

$$R_{\text{yield}} = (\Phi_b = 1.0)(R_{n,\text{yield}})$$

$$\text{LRFR Rating Factor} = \frac{R_{\text{yield}} - DL_{rxn}}{(L+I)_{rxn}}$$

7.2.9.7B The corroded web rating at both the Inventory and Operating levels shall be determined as follows:

For Allowable Stress Ratings:

$$R_{\text{yield,inv}} = \left[ \frac{1}{(\Omega = 1.5)} \right] (R_{n,\text{yield}})$$

$$R_{\text{yield,oper}} = \left[ \frac{1}{(\Omega = 1.5 \times \frac{55}{75})} \right] (R_{n,\text{yield}})$$

For Load Factor Ratings:

$$R_{\text{yield,inv}} = \left[ \frac{1}{(\Omega = 1.0)} \right] (R_{n,\text{yield}})$$

$$R_{\text{yield,oper}} = \left[ \frac{1}{(\Omega = 1.0 \times \frac{55}{75})} \right] (R_{n,\text{yield}})$$

$$\text{Rating Factor} = \frac{R_{\text{yield}} - DL_{rxn}}{(L+I)_{rxn}}$$

Note: For Load Factor Ratings, apply the appropriate load factors to  $DL_{rxn}$  and  $(L + I)_{rxn}$

## 7.2.10 Special Instructions for Load Rating of Deteriorated Prestressed Beams

7.2.10.1 Concrete deterioration and loss of prestressing is a significant issue in the load rating of prestressed concrete beams. This issue is of particular concern with adjacent box and deck beam bridges, as these structures are impossible to completely inspect, with only the bottom flange and the exterior web of the fascia beams visible and available for tactile inspection. However, in many instances evidence of leakage of salt laden roadway runoff through the grouted joints is visible, indicating possible deterioration of unknown levels in locations unavailable for inspection.

Often this deterioration will progress to the underside of the beam (bottom flange), spalling off large pieces of concrete and exposing the prestressing strands to the environment, eventually leading to their deterioration. There is no uniformly accepted guidance on how to estimate loss of prestressing force, if any, and its effect on load carrying capacity.

The following guidelines for calculating a reduced prestressing force are based primarily upon research conducted by the University of Illinois at Urbana-Champaign and Illinois DOT (IDOT),



augmented with MassDOT experience, and are to be used in evaluating prestressed concrete beams. Refer to Figures 7.2.10-1 and 7.2.10-2 below for guidance.

7.2.10.2 In the vicinity of exposed reinforcing steel stirrups deduct 100% of the strand area located in the bottom row directly above the limits of the exposed stirrups. Deduct 25% of the area of the strands in the next row directly above the limits of the exposed stirrups. Deduct 25% of the area of the strand(s) in the bottom row next to the area of the exposed reinforcing stirrups.

7.2.10.3 In the vicinity of exposed prestressing strands deduct 100% of the strand area within the limits where they are exposed. Deduct 50% of the area of the strands in the next row directly above the limits of the exposed strands. Deduct 50% of the area of the strand(s) in the bottom row next to the limits of the exposed prestressing strands.


7.2.10.4 In areas of concrete delamination without exposed reinforcing stirrups or prestressing strands deduct 50% of the area of the prestressing strands located in the row directly above the limits of the delamination. Deduct 10% of the area of the prestressing strand(s) in the bottom row next to the limits of the delamination.

7.2.10.5 A longitudinal crack shall be considered to be a delamination that is six inches wide centered on the crack. The length of the delamination shall be the length of the crack plus six inches at each end of the crack. The loss of prestressing force at this theoretical delamination shall be calculated in accordance with Paragraph 7.2.10.4 above.

7.2.10.6 The reduced prestressing force due to losses as calculated in the paragraphs above shall only apply to the area of the deterioration. Outside of these areas, all prestressed strands shall be assumed to be 100% effective and shall be appropriately re-developed into areas of sound concrete. For example, a strand with 100% loss will require 100% of its development length before it is considered fully effective again. Likewise, a strand with 50% section loss will require 50% of its development length, in sound concrete, before it is fully effective again.



**Figure 7.2.10-1: Example of Spalls and Delamination**

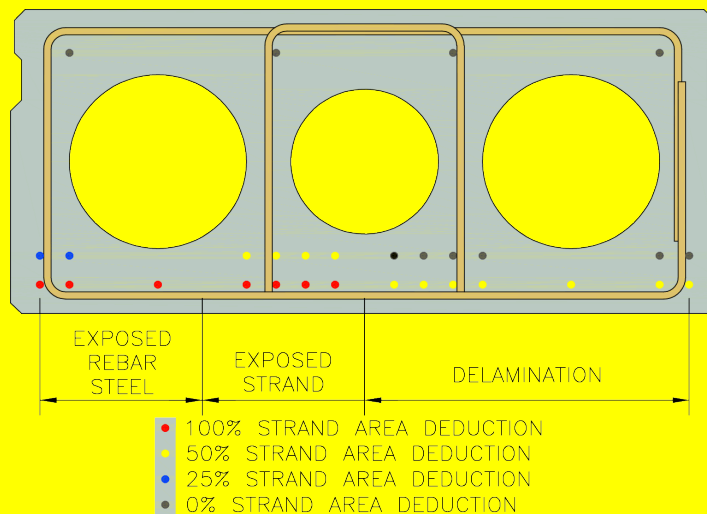

**Figure 7.2.10-2: Deck Beam Cross-Section (see Figure**

### 7.2.11 Guidelines for Preparing the Evaluation of Rating and Recommendations

**7.2.11.1 Evaluation of Rating.** The Rating Engineer shall summarize the controlling elements of the structure that the Summary of Rating is based on. The Rating Engineer shall also explain the reason for any significant differences between the current rating results and those of the previous rating, especially if the current rating values are much greater. Since a bridge should not experience a large gain in strength with age, this evaluation should also prompt a review of the of the analysis methods and assumptions as well as a review of the computer model used and rating software results for any potential errors. Similarly, the rating analysis methods, assumptions, software, etc. shall be reviewed if a rating has reduced significantly without notable section loss or added weight.

**7.2.11.2 Recommendations.** The Rating Engineer shall make recommendations for either improving or maintaining the condition of the structure. The Rating Engineer may also make general or specific recommendations to address a structural deficiency or to improve the load carrying capacity of the bridge. Such recommendations shall be based on sound engineering judgment and the results of the

rating analysis. The Rating Engineer must examine all ramifications of such recommendations so that any recommendation included in the rating report is feasible, safe and shall not adversely affect the structure or its long-term performance and maintainability.


The Rating Engineer is cautioned against making unrealistic or impractical recommendations just for the sake of making a recommendation. Any specific recommendation that may alter the bridge's load carrying capacity shall include rating calculations, located in Appendix C of the Report, that shall indicate the revised rating if the recommendation is implemented. For example, if temporary concrete barriers are recommended to restrict live load from an exterior beam, the effect of the added dead load shall be considered in the rating of the interior beams.

**7.2.11.3 Recommendations for Immediate Action.** If the Rating Engineer considers that addressing the condition of the bridge structure or its load carrying capacity requires immediate action, they are obligated to inform the State Bridge Engineer as soon as possible and not wait for the report to be completed and submitted.

## **7.3 REPORT SUBMITTAL REQUIREMENTS**

### **7.3.1 Submittal Requirements and Submittal Media**

**7.3.1.1 Review Submission.** An initial submission for review shall be made which satisfies all the subsequent requirements for a Load Rating Report, except that this review submission does not require the Rating Engineer's stamp or signature. The Independent Reviewer shall still sign and date but not stamp the Statement of Concurrence to provide assurance that the report has been reviewed prior to submission. Following an initial review and approval of the Ratings and Overloads Unit, the Rating Engineer shall provide a final stamped, signed, and dated submittal which will also including the stamp, signature and date of the Independent Reviewer, and a completed Rating Checklist. Should the initial submittal require revisions due to comments provided by the Ratings and Overloads Unit, these comments shall be resolved and a revised initial submittal provided if necessary, for subsequent review and approval or comment prior to the final stamped, signed, and dated submittal.

**7.3.1.1 Electronic Media.** The entire report shall be submitted as Adobe Acrobat format ( PDF) files on a compact disk (CD). The CD shall be included in a pocketed sleeve attached to the inside of the rear colored stock cover of the Rating Report. The sleeve shall feature an anti-static poly liner to protect the data and shall prevent the disk from becoming detached from the Rating Report if the report is handled roughly or turned upside down. The CD shall be color-coded as follows: RED, if the rating for any posting vehicle is 6 tons or less; YELLOW, if more than 6 tons but less than statutory; and GREEN for statutory or greater. It shall be labeled with a typed title block with the following information:

1. Name of the Consulting Firm
2. Town/City
3. Bridge Number, BIN Number
4. Facility Carried / Feature Intersected
5. Date of Rating
6. Name and version of software used

The names of Facility Carried / Feature Intersected and the Memorial Name/Local Name must be exactly the same as those given on the SI&A with the following exceptions. The generic Feature and/or Facility Codes (i.e. WATER, HWY, RR, etc.) shall be omitted, but the Interstate (I-), US Route (US) and State Route (ST) code along with the route number, followed by the local street names (if any) in parentheses, shall be provided. The local street names shall be fully spelled out (e.g. N WSHNGTN ST on the SI&A shall be spelled out as North Washington Street). If the same stretch of road has several numbered routes associated with it, then all of the routes shall be provided separated by a slash (/) starting with the Interstate, then the US Route, then the State Route, then followed by the local street name (if any) in parentheses. The following are examples of the proper identification of the bridge with some common Facility Carried/Feature Intersected:

- ST 19 (WALES ROAD) OVER MILL BROOK
- ST 20A (PLAINFIELD STREET) OVER I-91
- US 202 (GRANBY ROAD) OVER ST 116 (NEWTON STREET)
- I-95/US 1/ST 3 OVER WEST STREET
- ST 31 (RESERVOIR STREET) OVER PROVIDENCE & WORCESTER RR
- WOLOMOLOPOAG STREET OVER AMTRAK/MBTA

The files on the CD shall be organized in the following four folders:

1. COMPUTER INPUT FILES: all BrR or other MassDOT approved rating analysis software input files that were used to produce the rating
2. CALCULATION FILES: the spreadsheets and other computer calculation aids that were used to develop the rating
3. RATING REPORT: the Rating Report itself formatted as specified in Section 7.5
4. BRIDGE PLANS: all plans of the bridge that were made available to the Rating Engineer for the preparation of the Rating Report

7.3.1.3 Hardcopy Media. Those sections of the report that are noted in Section 7.5 as HARDCOPY shall be printed on 8½" x 11" paper and shall be bound with binder clips and color-coded Report covers, front and back.

### 7.3.2 Report Distribution

One CD and one copy of the bound report shall be submitted to the Bridge Section.

### 7.3.3 Checklist

A separately stapled Bridge Load Rating Report Checklist shall be provided with each rating submission. Note, that any item in the checklist noted with FATAL OMISSION that is responded to with a NO (N) response will result in an automatic rejection of the rating without any further review by the Bridge Section.

## 7.4 CALCULATIONS AND INPUT FILE FORMAT

### 7.4.1 Hand and Electronic Calculations

7.4.1.1. All submitted hand calculations shall include either sketches or copies of the necessary sheets or details from the plans to support the calculations being prepared. All hand calculations shall include all details along with relevant notes and code references so that every step of the calculations can be easily followed, in a logical order, legible and prepared on 8 1/2" x 11" paper.

7.4.1.2 Calculations using spreadsheets and other computer calculation aids (e.g. Mathcad) shall be formatted and presented as hand calculations and formatted to be printed on 8 1/2" x 11" paper. These computer aided calculations shall be presented in a logical order along with relevant notes and code references so that every step of the calculations can be easily followed. Copies of these files shall be included on the disc as described in Subsection 7.3.1. For example, spreadsheets, and other similar formats, shall be appropriately documented with references and organized so that the calculations in them can be easily followed by an independent reviewer. Calculations shall be organized by name or in folders so that an independent reviewer can determine how each file is intended to be used. An index identifying each file by name with a brief explanation shall be provided.

### 7.4.2 BrR Input File Submission

7.4.2.1B The Rating Engineer shall prepare the BrR file in a manner that will allow MassDOT to analyze the structure using the LRFR method at a later date.

7.4.2.2 BrR shall be used to rate every primary load carrying element of the structure in order to determine the controlling live load capacity of the structure. The bridge shall be modeled as a Girder System, wherever possible. Links shall be used to define identical girders within a girder system. However, the following member types shall be modeled as described below:

1. When the structure is a concrete slab bridge it shall be modeled as a Girder Line;
2. When the exterior beam acts composite with a sidewalk or a safety curb, this particular member shall be modeled as a Girder Line and the remaining portion of the structure shall be modeled as a Girder System;

7.4.2.3 The file naming convention for the BrR file shall be consistent with the following Massachusetts specific example of a Town Line bridge:

Bridge No. D-02-033=P-15-015, BIN = BG1, DANA-PRESCOTT, MAIN STREET / SWIFT RIVER shall be identified without any blank spaces using the following UPPER CASE characters:

Bridge ID (unlimited characters):	D-02-033=P-15-015(BG1)
NBI Structure ID (NBI Item 8, 15 characters):	D02033BG1DOTNBI
Name (same as Bridge ID):	D-02-033=P-15-015(BG1)
Description (unlimited characters):	2 SPAN SIMPLE COMPOSITE MULTIPLE STEEL STRINGER (Modify as required.)

Where:

The first 13 characters (22 if town line bridge, as shown in the example) reflect the structure's Bridge Number, including hyphens, equal sign, and parentheses, and the characters within the parentheses represent the structure's BIN.

For submission purposes, the file shall be exported with the extension .XML:

D-02-033=P-15-015(BG1).XML

7.4.2.4 All relevant information from the structure SI&A sheet shall be transcribed verbatim into the available fields in the BrR file's Bridge Workspace Window.

7.4.2.5 Calculations for all loads and distribution factors shall be clearly shown within the rating. All dead loads and live distribution factors shall be summarized in a table.

7.4.2.6 Summary of non-composite dead loads, which may include, but not be limited to, diaphragms, utilities and utility supports, and sign supports, should typically not include the self-weight of the beams, as these are often calculated by the software. If this is not the case, or if there are other special circumstances, include the self-weight of the beam in the table and the reasoning shall be clearly noted.

7.4.2.7 Each element shall have the results of the analysis summarized in Rating Results Summary Reports produced by BrR. Elements shall be numbered to be consistent with the plans and inspection reports. In the event of a conflict regarding element numbers, the plans shall be followed. The first report shall determine the lowest rating value (analyzed by generating values at 1/10th points and at user defined points of interest) and the other reports, if necessary, shall determine the lowest rating value at each point of interest (generated by selecting the user defined points of interest button under the member alternatives description, engine tab, properties button).

7.4.2.8 All BrR files shall include a defined Bridge Alternative. The Bridge Alternative allows for Permit Route Analyses to be performed directly from BrR Bridge Explorer.

7.4.2.9A All BrR files shall include the HL-93 design live load and all Rating Vehicles used in the rating analysis.

7.4.2.9B All BrR files shall include all Rating Vehicles used in the rating analysis.

7.4.2.10 The BrR output files shall include the following:

1. BrR produced sketches of the bridge framing plan, bridge cross section, and member elevations and cross sections for each span of steel stringer structures;
2. BrR produced sketches of the bridge framing plan, bridge cross section, member elevations and cross sections, and strand locations at midspan and support locations for each span of prestressed concrete structures;
3. BrR produced sketches of the bridge framing plan, bridge cross section, and member elevation and cross sections with the reinforcement for each span of reinforced concrete slab, T- beam and I-beam structures;
4. BrR produced Rating Results Summary Reports for all members and points of interest;



7.4.2.11 The same submission requirements shall apply when an alternate approved computer program is utilized. For example, if CSiBridge, MIDAS, etc. are used, sketches showing legible node and element numbers shall be included.

### 7.4.3 Check of Calculations Submission


All rating calculations shall be reviewed with a check of the methods, assumptions, load distributions and BrR, or other approved computer software input files, in addition to a check of the actual calculations. The Standard Statement of Concurrence with the calculations shall be included in the Rating Report with the P.E. Stamp, date and signature of the Independent Reviewer. The Independent Reviewer's name and P.E. Number shall be typewritten below the signature line. The standard statement of concurrence shall be as follows:

"I HEREBY STATE THAT I HAVE CHECKED THE METHODS, ASSUMPTIONS, LOAD DISTRIBUTION, COMPUTER INPUT FILE(S) AND ALL CALCULATIONS FOR THIS RATING REPORT FOR BRIDGE NO. A-12-345 (ABC). BY SIGNING BELOW, I CONFIRM THAT I AGREE WITH ALL METHODS, ASSUMPTIONS, LOAD DISTRIBUTIONS, COMPUTER INPUT FILE(S), AND CALCULATIONS CONTAINED IN THIS RATING REPORT."

The Independent Reviewer shall be a Professional Engineer registered in the Commonwealth of Massachusetts. The Independent Reviewer and the Rating Engineer shall not be the same person.

## 7.5 RATING REPORT

### 7.5.1 Preparation and Format

The entire Rating Report shall be prepared as an Adobe Acrobat format ( PDF) file. The PDF file pages shall be sized as 8½" x 11" sheets. The font shall be Times New Romans with a minimum size 11. The PDF file shall also have a front and back cover that shall be color coded as follows: RED, if the rating for any posting vehicle is 6 tons or less; YELLOW, if the rating for any posting vehicle is more than 6 tons but less than statutory; and GREEN if the rating for any posting vehicle is statutory or greater. All pages that require a P.E. stamp shall be scanned after the stamp is affixed, signed and dated. Green covers shall be Neenah Exact Vellum 67 lb. Cover Stock, Green. Yellow covers shall be Neenah Exact Vellum 67 lb. Cover Stock, Yellow. Red covers shall be Neenah Astrobrights 65 lb. Cardstock, Re-Entry Red, or the most similar stock and color available, with a minimum 65 lb. cover weight.

The entire PDF file of the Rating Report shall be bookmarked so that the reader can navigate to each individual section directly without having to scroll through the entire file. The Appendices containing calculations or computer output shall be further bookmarked to match the index of the calculations or by each computer output (e.g., Beam #1, etc.) so that the reader can navigate to a particular calculation or output of interest.

In addition to the CD, those sections of the report that are noted **HARDCOPY** shall be printed on 8½" x 11" sheets and shall be bound with binder clips. The lettering of the Bridge Number shall be such as to permit easy recognition. Covers with cutouts, which may get torn in filing cabinets, and pages greater than 8½" x 11" in size shall not be used.



The Facility Carried / Feature Intersected and Memorial Name/Local Name listed on the Rating Report cover shall be as described in Paragraph 7.3.1.1.

## 7.5.2 Report Organization

The Rating Report PDF file shall consist of the following sections, organized in the following order. Those sections marked **HARDCOPY** shall also be included in the printed report:

### 1. REPORT COVER (HARDCOPY)

- 1.1. P.E. Stamp with date and signature of the Rating Engineer shall be placed here.
- 1.2. Color coded background and formatted as discussed in Subsection 7.5.1 and as shown in Figure 7.1

### 2. TITLE SHEET (HARDCOPY)

- 2.1. A copy of the Report Cover formatted as shown in Figure 7.1 printed on plain white paper and containing the P.E. Stamp with the date and signature of the Rating Engineer.

### 3. INDEX

- 3.1. Index of sections outlined with page numbers.

### 4. SUMMARY OF BRIDGE RATING (HARDCOPY)

- 4.1. Tabular listing of the controlling rating values from the Breakdown of Bridge Rating (see below). Item 64 shall not be lower than Item 66.
- 4.2. P.E. Stamp with date and signature of the Rating Engineer shall be placed here.
- 4.3. Formatted as shown in Figure 7.2A or 7.4B for all structures.

### 5. BREAKDOWN OF BRIDGE RATING (HARDCOPY – printed double sided)

- 5.1. Tabular listing of all bridge elements that must be rated to determine the rating of the bridge and at all points of interest as described in Subsection 7.2.2. All ratings below statutory shall have the text highlighted with the appropriate color. The controlling rating cell shall be shaded solid with the appropriate color, Green (red=0, green=255, blue=127), Yellow (red=255, green=255, blue=0), Red (red=255, green=0, blue=0), and the text shall be bold. For legibility, the font color for green and red shading and highlighting shall be white. All cells in the Breakdown shall be filled in. Elements that do not require a rating shall be noted with a dash.

When alternative ratings using actual lane locations are provided, then these ratings shall be performed at the same points of interest and placed underneath the original ratings at each row. The cells are to be shaded and formatted as described above. These rating values shall be the controlling ratings for these members.

- 5.2. Formatted as shown in Figures 7.3A-1 through 7.3A-3, and 7.6A, or 7.5B-1 through 7.5B-3, and 7.6B.
- 5.3. Formatted as shown in Figure 7.7 when alternative rating factors using actual lane locations are provided.

## 6. LOCATION MAP

- 6.1. The location map shall be a street map in color and provide sufficient landmarks and adjacent highway information to allow the user to find the bridge in the field without additional information. Satellite or aerial photographs and topography maps are not acceptable substitutes.

## 7. DESCRIPTION OF BRIDGE

- 7.1. Formatted as shown in Figure 7.8.

## 8. RATING ANALYSIS ASSUMPTIONS AND CRITERIA

- 8.1. Description of all methods, assumptions, allowable stresses, and strengths used to determine the rating of the structure, including computer programs, with version or release numbers utilized.
- 8.2. Statement of the applicability of the substructure and/or deck to the rating.

## 9. EVALUATION OF RATING AND RECOMMENDATIONS (HARDCOPY)

- 9.1. Summary of controlling elements of the structure and recommendations to either improve or maintain the condition of the structure as described in Subsection 7.2.11.
- 9.2. Comparison of rating to previous rating as described in Paragraph 7.2.11.1 and as shown in Figure 7.9.

## 10. AVAILABLE PLANS AND INSPECTION REPORTS

- 10.1. Listing of all plans, latest inspection report(s) used and their sources that were made available to the Rating Engineer for the purpose of preparing the Rating Report.

## 11. LOADINGS USED FOR BRIDGE RATING

- 11.1. Standard diagrams of vehicles used in the rating showing axle weights and spacing as shown in Figures 7.10A, 7.10B, 7.11, 7.12 and/or 7.13A as applicable.

## 12. APPENDIX A - INSPECTION REPORTS

- 12.1. Inspection Reports including structure inventory and appraisal (SI&A), structures inspection field report and field notes. The first sheet shall be the latest SI&A sheet. Inspection Reports must be the latest available Routine, Routine & Special Member and Underwater at the time the Rating Report is submitted and shall include color reproductions of all inspection report photos. Appendix A shall be double-sided except that the SI&A sheet shall be an odd page with a blank back, and the first page of each different inspection report shall start on a new (odd) page. The National Bridge Element Inspection (PONTIS) pages shall not be included.

## 13. APPENDIX B - PHOTOS

- 13.1. An abundant number of color photographs of the structure, each no smaller than 3" by 5", including both elevation views, views of both approaches, framing views (if it varies, one of each type) and sufficient critical member photos shall be provided to adequately display the current condition of the structure. An index of all photos shall precede the photos. Photos of deficiencies where findings are different from those noted in the Inspection Reports shall be included.

**14. APPENDIX C - COMPUTATIONS**

- 14.1. The Standard Statement of Concurrence of the Independent Reviewer (see Subsection 7.4.3) **on a separately printed sheet (HARDCOPY)**
- 14.2. Tabular summary of all non-composite dead loads, composite dead loads, and live load distribution factors, etc., per beam.
- 14.3. Plan, framing plan, and bridge cross sections, as well as unique details and elements, as appropriate to identify all members that have been rated and included in Breakdown of Rating tables.
- 14.4. All hand calculations and computer aided calculations prepared as specified in Subsection 7.4.1 along with an index.

**15. APPENDIX D - COMPUTER INPUT AND OUTPUT**

- 15.1. Copies of all input and output summary pages, including software generated sketches of the bridge/framing plan, bridge cross section, member elevations and cross sections from computer programs used in rating the structure, and the controlling ratings that are included in the Breakdown of Bridge Rating, controlling values highlighted.
- 15.2. A summary sheet of all rating factors and rating values for each structure's particular elements shall be created and placed in front of each output of each particular element.

**16. APPENDIX E - OLD RATING REPORT REFERENCE**

- 16.1 Copies of Sections 2 (TITLE SHEET), 4 (SUMMARY OF BRIDGE RATING), 6 (LOCATION MAP), 7 (DESCRIPTION OF BRIDGE), 8 (RATING ANALYSIS ASSUMPTIONS AND CRITERIA), 9 (EVALUATION OF RATING AND RECOMMENDATIONS), and 10 (AVAILABLE PLANS AND INSPECTION REPORTS), as identified above, from the previous rating report shall be included in this Appendix for reference. If the previous Rating Report does not have these sections as numbered above, then the Rating Engineer shall provide those pages that best fit the description of these sections.

**17. APPENDIX F - MISCELLANEOUS**

- 17.1 Copies of material testing results, shop drawings if different from the Construction Drawings, and other miscellaneous reports/data that were used in the preparation of the Rating Report. Copies of unique reference or textbook pages that were used by the Rating Engineer in addition to AASHTO, including but not limited to those from old textbooks, codes, manuals, catalog cuts (i.e. custom rails, light standards, etc.), and design tables from manufacturers (i.e. Acrow panels, custom beam shapes, etc.).

**18. CHECKLIST (HARDCOPY, separate from Report)**

- 18.1 The Bridge Load Rating Report Checklist shall be submitted separately stapled and printed on 8½"x11" sheets.

**7.5.3 AVAILABLE PLANS**

7.5.3.1 Copies of all plans that were made available to the Rating Engineer and used in the preparation of the Rating Report shall be included in this folder. If the plans were provided in file

formats other than PDF, the Rating Engineer shall convert them to PDF format prior to inclusion in this folder. Plans shall be combined into a single PDF file, per Construction Contract.

7.5.3.2 Organization. Each set of plans shall be placed in a separate folder. The name of the folder shall be the date the plans were advertised for construction, or if this is not available, then the latest date provided on the plans. These individual folders shall be placed in the main BRIDGE PLANS folder on the CD.

## **BRIDGE RATING**

Prepared For

**MASSACHUSETTS DEPARTMENT OF TRANSPORTATION  
HIGHWAY DIVISION**

**DANA-PRESCOTT**

**MAIN STREET**

**OVER**

**SWIFT RIVER**

**BRIDGE NO. D-02-033=P-15-015(BG1)**

**STRUCTURE NO. D02033-BG1-DOT-NBI**

**SHODDY MILL BRIDGE**

DATE OF INSPECTION

DATE OF RATING

PREPARED BY

P.E. Stamp with Signature and Date

Consultant Logo  
Consultant Name  
Consultant Address

**Figure 7.1: Report Cover/Title Sheet**

### SUMMARY OF BRIDGE RATING

TOWN/CITY: DANA-PRESCOTT

BRIDGE NO.: D-02-033=P-15-015

CARRIES: MAIN STREET

OVER: SWIFT RIVER

STRUCTURE NO.: D02033-BG1-DOT-NBI

BIN NO.: BG1

### **RATINGS (TONS)**

LRFR RATINGS FOR RATING VEHICLES LOAD RATINGS IN ENGLISH TONS		
VEHICLE TYPE	INVENTORY	OPERATING
H20	48.6	63.2
TYPE 3	48.8	63.4
TYPE 3S2	54.0	70.2
SU4	29.1	45.2
SU5	33.3	49.4
SU6	35.5	51.6
SU7	41.7	58.8
EV2	-	35.0
EV3	-	46.0

HL-93 LOAD AND RESISTANCE FACTOR RATING FACTORS PROVIDED IN COMPLIANCE WITH THE FHWA NBIS CODING GUIDE	
INVENTORY	OPERATING
ITEM 66	ITEM 64
4.8	6.2



A posting recommendation has been made based on the results of this Rating Report. This recommendation is contained in the "Memorandum to the NBIS File" for this bridge, dated.

Rating Engineer P.E. Stamp

State Bridge Engineer

Date

**Figure 7.2A: Summary of Bridge Rating (LRFR)**

### **BREAKDOWN OF BRIDGE RATING**

TOWN/CITY: DANA-PRESCOTT

BRIDGE NO.: D-02-033=P-15-015

CARRIES: MAIN STREET

OVER: SWIFT RIVER

STRUCTURE NO.: D02033-BG1-DOT-NBI

BIN NO.: BG1

BRIDGE ELEMENT <sup>1</sup>		INVENTORY RATING BY LRFR METHOD (ENGLISH TONS)			OPERATING RATING BY LRFR METHOD (ENGLISH TONS)		
		H20	Type 3	Type 3S2	H20	Type 3	Type 3S2
EXTERIOR SIDEWALK BEAMS, NO.1 & 5	BOTTOM PLATE TRANSITION AT X = 20'-0 1/4"	105.5	115.9	152.0	137.1	150.7	197.7
	FLEXURAL STRENGTH AT 0.5L	77.4	87.2	119.2	100.6	113.4	155.0
1ST INTERIOR ROADWAY BEAMS, NO.2 & 4	BOTTOM PLATE TRANSITION AT X = 15'-4 1/4"	63.7	73.4	112.9	82.9	95.4	146.8
	FLEXURAL STRENGTH AT 0.5L	48.3	58.0	91.0	62.7	75.4	118.4
INTERIOR BEAM, NO.3	BOTTOM PLATE TRANSITION AT X = 10'-7 5/8"	105.2	114.2	143.8	136.4	148.1	186.4
	FLEXURAL STRENGTH AT 0.5L	71.9	79.9	104.4	93.3	103.6	135.3

Shaded cells are controlling ratings

Highlighted values are below statutory

#### **Notes:**

1. For this report, beams and bays are numbered from the south consistent with the latest Routine Inspection Report

**Figure 7.3A-1: Breakdown of Bridge Rating – Steel Beams (LRFR)**



## BREAKDOWN OF BRIDGE RATING

TOWN/CITY: DANA-PRESCOTT

BRIDGE NO.: D-02-033=P-15-015

CARRIES: MAIN STREET

OVER: SWIFT RIVER

STRUCTURE NO.: D02033-BG1-DOT-NBI

BIN NO.: BG1

BRIDGE ELEMENT <sup>1</sup>		INVENTORY RATING BY LRFR METHOD (ENGLISH TONS)				OPERATING RATING BY LRFR METHOD (ENGLISH TONS)					
		SU4	SU5	SU6	SU7	SU4	SU5	SU6	SU7	EV2	EV3
EXTERIOR SIDEWALK BEAMS, NO.1 & 5	BOTTOM PLATE TRANSITION AT X = 20'-0 1/4"	113.5	117.1	120.4	126.7	147.6	152.3	156.6	164.7	176.4	178.2
	FLEXURAL STRENGTH AT 0.5L	83.5	87.1	87.6	89.6	108.5	113.3	113.8	116.4	136.6	133.4
1ST INTERIOR ROADWAY BEAMS, NO.2 & 4	BOTTOM PLATE TRANSITION AT X = 15'-4 1/4"	71.1	74.5	78.0	84.5	92.4	96.9	101.4	109.8	147.2	149.4
	FLEXURAL STRENGTH AT 0.5L	54.1	57.9	58.3	60.5	70.3	75.2	75.8	78.6	121.5	117.0
INTERIOR BEAM, NO.3	BOTTOM PLATE TRANSITION AT X = 10'-7 5/8"	112.2	115.3	118.6	123.8	145.4	149.4	153.8	160.5	186.9	188.5
	FLEXURAL STRENGTH AT 0.5L	76.9	79.8	80.2	81.8	99.7	103.5	103.9	106.0	135.7	132.9

Shaded cells are controlling ratings

Highlighted values are below statutory

### Notes:

1. For this report, beams and bays are numbered from the south consistent with the latest Routine Inspection Report

Figure 7.3A-2: Breakdown of Bridge Rating – Steel Beams (LRFR)

### **BREAKDOWN OF BRIDGE RATING**

TOWN/CITY: DANA-PRESCOTT

BRIDGE NO.: D-02-033=P-15-015

CARRIES: MAIN STREET

OVER: SWIFT RIVER

STRUCTURE NO.: D02033-BG1-DOT-NBI

BIN NO.: BG1

BRIDGE ELEMENT <sup>1</sup>		INVENTORY LRFR RATING FACTORS		OPERATING LRFR RATING FACTORS	
		HL-93 TRUCK & LANE LOAD	HL-93 TANDEM & LANE LOAD	HL-93 TRUCK & LANE LOAD	HL-93 TANDEM & LANE LOAD
EXTERIOR SIDEWALK BEAMS, NO.1 & 5	BOTTOM PLATE TRANSITION AT X = 20'-0 1/4"	2.6	3.1	3.4	4.0
	FLEXURAL STRENGTH AT 0.5L	2.0	2.2	2.6	3.3
1ST INTERIOR ROADWAY BEAMS, NO.2 & 4	BOTTOM PLATE TRANSITION AT X = 15'-4 1/4"	1.8	2.0	2.3	2.6
	FLEXURAL STRENGTH AT 0.5L	1.4	1.5	1.8	1.9
INTERIOR BEAM, NO.3	BOTTOM PLATE TRANSITION AT X = 10'-7 5/8"	2.5	3.0	3.3	3.9
	FLEXURAL STRENGTH AT 0.5L	1.8	2.0	2.3	2.6

Shaded cells are controlling ratings

Highlighted values are below statutory

**Notes:**

1. For this report, beams and bays are numbered from the south consistent with the latest Routine Inspection Report

**Figure 7.3A-3: Breakdown of Bridge Rating – Steel Beams (LRFR)**

### **SUMMARY OF BRIDGE RATING**

TOWN/CITY: DANA-PRESCOTT

BRIDGE NO.: D-02-033=P-15-015

CARRIES: MAIN STREET

OVER: SWIFT RIVER

STRUCTURE NO.: D02033-BG1-DOT-NBI

BIN NO.: BG1

#### **RATINGS (TONS)**

ALLOWABLE STRESS RATINGS FOR RATING VEHICLES LOAD RATINGS IN ENGLISH TONS		
VEHICLE TYPE	INVENTORY	OPERATING
H20	32.4	72.2
TYPE 3	32.5	73.3
TYPE 3S2	36.0	81.4
HS20	32.8	73.8
SU4	29.1	45.2
SU5	33.3	49.4
SU6	35.5	51.6
SU7	41.7	58.8
EV2	-	35.0
EV3	-	46.0

MS18 LOAD FACTOR RATING IN METRIC TONS PROVIDED IN COMPLIANCE WITH THE FHWA NBIS CODING GUIDE			
INVENTORY		OPERATING	
ITEM 66	MS Equivalent	ITEM 64	MS Equivalent
46.5	MS25.8	78.1	MS43.4



A posting recommendation has been made based on the results of this Rating Report. This recommendation is contained in the "Memorandum to the NBIS File" for this bridge, dated \_\_\_\_\_.

Rating Engineer P.E. Stamp

State Bridge Engineer

Date

**Figure 7.4B: Summary of Bridge Rating (ASR/LFR)**

### **BREAKDOWN OF BRIDGE RATING**

TOWN/CITY: DANA-PRESCOTT

BRIDGE NO.: D-02-033=P-15-015

CARRIES: MAIN STREET

OVER: SWIFT RIVER

STRUCTURE NO.: D02033-BG1-DOT-NBI

BIN NO.: BG1

BRIDGE ELEMENT <sup>1</sup>		INVENTORY RATING BY ALLOWABLE STRESS METHOD (ENGLISH TONS)				OPERATING RATING BY ALLOWABLE STRESS METHOD (ENGLISH TONS)			
		H20	Type 3	Type 3S2	HS20	H20	Type 3	Type 3S2	HS20
EXTERIOR SIDEWALK BEAMS, NO.1 & 5	BOTTOM PLATE TRANSITION AT X = 20'-0 1/4"	49.3	53.2	63.7	55.2	93.8	101.2	121.2	105.0
	FLEXURAL STRENGTH AT 0.5L	36.7	39.6	47.4	41.1	69.8	75.3	90.2	78.2
1ST INTERIOR ROADWAY BEAMS, NO.2 & 4	BOTTOM PLATE TRANSITION AT X = 20'-0 1/4"	31.3	33.5	39.5	34.5	61.9	66.2	78.1	68.1
	FLEXURAL STRENGTH AT 0.5L	23.3	25.1	30.1	26.1	62.4	67.2	80.6	69.8
	SHEAR AT WEST SUPPORT DUE TO DETERIORATION	20.0	22.5	31.0	23.8	32.2	36.3	49.7	38.2
	WEB YIELDING AT WEST SUPPORT DUE TO DETERIORATION	2.6	3.0	4.0	3.2	8.6	9.5	13.0	10.1
INTERIOR BEAM, NO.3	BOTTOM PLATE TRANSITION AT X = 20'-0 1/4"	31.7	33.9	40.0	34.8	62.3	66.6	78.6	68.5
	FLEXURAL STRENGTH AT 0.5L	24.9	26.9	32.2	27.9	62.7	67.6	81.0	70.2

Shaded cells are controlling ratings

Highlighted values are below statutory

**Notes:**

1. For this report, beams and bays are numbered from the south consistent with the latest Routine Inspection Report

**Figure 7.5B-1: Breakdown of Bridge Rating – Steel Beams (ASR/LFR)**

### **BREAKDOWN OF BRIDGE RATING**

TOWN/CITY: DANA-PRESCOTT

BRIDGE NO.: D-02-033=P-15-015

CARRIES: MAIN STREET

OVER: SWIFT RIVER

STRUCTURE NO.: D02033-BG1-DOT-NBI

BIN NO.: BG1

BRIDGE ELEMENT <sup>1</sup> BRIDGE ELEMENT <sup>1</sup>		INVENTORY RATING BY ALLOWABLE STRESS METHOD (ENGLISH TONS)				OPERATING RATING BY ALLOWABLE STRESS METHOD (ENGLISH TONS)					
		SU4	SU5	SU6	SU7	SU4	SU5	SU6	SU7	EV2	EV3
EXTERIOR SIDEWALK BEAM, NO.1 & 5	BOTTOM PLATE TRANSITION AT X = 20'-0 1/4"	52.1	53.6	53.7	54.4	99.0	101.7	102.0	103.5	102.1	100.6
	FLEXURAL STRENGTH AT 0.5L	38.5	39.6	39.7	40.2	73.2	75.2	75.4	76.5	75.5	74.4
1ST INTERIOR ROADWAY BEAM NO.2 & 4	BOTTOM PLATE TRANSITION AT X = 20'-0 1/4"	33.0	33.7	33.9	34.8	65.2	66.7	67.1	68.9	65.1	65.5
	FLEXURAL STRENGTH AT 0.5L	24.4	25.1	25.2	25.5	65.4	67.2	67.4	68.3	67.4	66.4
	SHEAR AT WEST SUPPORT DUE TO DETERIORATION	27.0	28.6	29.4	26.8	89.3	90.6	96.2	83.5	75.2	95.9
	WEB YIELDING AT WEST SUPPORT DUE TO DETERIORATION	3.5	3.7	3.8	3.5	11.6	11.8	12.5	10.9	9.8	12.5
INTERIOR BEAM, NO.3	BOTTOM PLATE TRANSITION AT X = 20'-0 1/4"	33.4	34.1	34.3	35.2	65.6	67.1	67.5	69.2	65.4	65.9
	FLEXURAL STRENGTH AT 0.5L	26.3	27.0	27.1	27.5	65.8	67.5	67.8	68.7	67.8	66.8

Shaded cells are controlling ratings

Highlighted values are below statutory

#### **Notes:**

- For this report, beams and bays are numbered from the south consistent with the latest Routine Inspection Report.

**Figure 7.5B-2: Breakdown of Bridge Rating – Steel Beams (ASR/LFR)**

### **BREAKDOWN OF BRIDGE RATING**

TOWN/CITY: DANA-PRESCOTT

BRIDGE NO.: D-02-033=P-15-015

STRUCTURE NO.: D02033-BG1-DOT-NBI

BIN NO.: BG1

BRIDGE ELEMENT <sup>1</sup>		INVENTORY RATING BY LOAD FACTOR METHOD (METRIC TONS)		OPERATING RATING BY LOAD FACTOR METHOD (METRIC TONS)	
		MS18	MS (EQUIV)	MS18	MS (EQUIV)
EXTERIOR SIDEWALK BEAMS, NO.1 & 5	BOTTOM PLATE TRANSITION AT X = 20'-0 1/4"	59.6	MS33.1	99.5	MS55.3
	FLEXURAL STRENGTH AT 0.5L	44.1	MS24.5	73.6	MS40.9
1ST INTERIOR ROADWAY BEAMS, NO.2 & 4	BOTTOM PLATE TRANSITION AT X = 20'-0 1/4"	38.5	MS21.4	64.2	MS35.7
	FLEXURAL STRENGTH AT 0.5L	39.4	MS21.9	65.9	MS36.6
	SHEAR AT WEST SUPPORT DUE TO DETERIORATION	22.3	MS12.4	37.3	MS20.7
	WEB YIELDING AT WEST SUPPORT DUE TO DETERIORATION	2.9	MS1.6	4.8	MS2.7
INTERIOR BEAM, NO.3	BOTTOM PLATE TRANSITION AT X = 20'-0 1/4"	38.7	MS21.5	64.6	MS35.9
	FLEXURAL STRENGTH AT 0.5L	39.6	MS22.0	66.2	MS36.8

Shaded cells are controlling ratings

Highlighted values are below statutory

**Notes:**

1. For this report, beams and bays are numbered from the south consistent with the latest Routine Inspection Report.

**Figure 7.5B-3: Breakdown of Bridge Rating – Steel Beams (ASR/LFR)**

### **BREAKDOWN OF BRIDGE RATING**

TOWN/CITY: DANA-PRESCOTT

BRIDGE NO.: D-02-033=P-15-015

CARRIES: MAIN STREET

OVER: SWIFT RIVER

STRUCTURE NO.: D02033-BG1-DOT-NBI

BIN NO.: BG1

BRIDGE ELEMENT <sup>1</sup>		INVENTORY RATING BY LRFR METHOD (ENGLISH TONS)			OPERATING RATING BY LRFR METHOD (ENGLISH TONS)		
		H20	Type 3	Type 3S2	H20	Type 3	Type 3S2
EXTERIOR SIDEWALK BEAMS, NO.1 & 5	CONCRETE SHEAR AT H/2	40.8	47.2	73.2	52.3	61.1	94.9
	TYPE A SERVICEABILITY – CONCRETE TENSION AT 0.50L	25.3	31.7	48.4	-	-	-
	FLEXURAL STRENGTH AT 0.50L	35.0	43.9	67.1	45.4	56.9	87.0
1ST INTERIOR ROADWAY BEAMS, NO.2 & 4	CONCRETE SHEAR AT H/2	32.6	37.7	58.5	42.3	48.8	75.9
	TYPE A SERVICEABILITY – CONCRETE TENSION AT 0.50L	31.2	39.1	59.8	-	-	-
	FLEXURAL STRENGTH AT 0.50L	35.5	44.5	68.1	46.0	57.7	89.1
INTERIOR BEAMS, NO.3 - NO.6	CONCRETE SHEAR AT H/2	32.7	37.7	58.6	42.3	48.9	75.9
	TYPE A SERVICEABILITY – CONCRETE TENSION AT 0.50L	18.9	23.7	36.2	-	-	-
	FLEXURAL STRENGTH AT 0.50L	23.5	29.4	45.0	30.4	38.2	58.4

Shaded cells are controlling ratings

Highlighted values are below statutory

#### **Notes:**

1. For this report, beams and bays are numbered from the south consistent with the latest Routine Inspection Report.

**Figure 7.6A: Breakdown of Bridge Rating – Prestressed Beams (LRFR)**



### **BREAKDOWN OF BRIDGE RATING**

TOWN/CITY: DANA-PRESCOTT

BRIDGE NO.: D-02-033=P-15-015

CARRIES: MAIN STREET

OVER: SWIFT RIVER

STRUCTURE NO.: D02033-BG1-DOT-NBI

BIN NO.: BG1

BRIDGE ELEMENT <sup>1</sup>		INVENTORY RATING BY ALLOWABLE STRESS METHOD (ENGLISH TONS)				OPERATING RATING BY ALLOWABLE STRESS METHOD (ENGLISH TONS)			
		H20	Type 3	Type 3S2	HS20	H20	Type 3	Type 3S2	HS20
EXTERIOR SIDEWALK BEAMS, NO.1 & 5	CONCRETE SHEAR AT H/2	53.1	61.2	94.5	65.3	88.7	102.2	157.8	109.0
	TYPE A SERVICEABILITY – CONCRETE TENSION AT 0.50L	26.9	33.7	51.6	38.4	-	-	-	-
	FLEXURAL STRENGTH AT 0.50L	36.3	45.5	69.6	51.8	60.6	76.0	116.2	86.5
1ST INTERIOR ROADWAY BEAMS, NO.2 & 4	CONCRETE SHEAR AT H/2	58.5	67.4	104.0	71.8	97.6	112.5	173.6	119.9
	TYPE A SERVICEABILITY – CONCRETE TENSION AT 0.50L	43.7	54.8	83.8	62.4	-	-	-	-
	FLEXURAL STRENGTH AT 0.50L	49.2	61.7	94.3	70.2	82.2	103.0	157.5	117.3
INTERIOR BEAMS, NO.3 - NO.6	CONCRETE SHEAR AT H/2	52.2	60.1	92.8	64.1	87.1	100.4	154.9	107.0
	TYPE A SERVICEABILITY – CONCRETE TENSION AT 0.50L	26.7	33.4	51.1	38.1	-	-	-	-
	FLEXURAL STRENGTH AT 0.50L	32.7	41.0	62.7	46.7	54.6	68.5	104.8	78.0

Shaded cells are controlling ratings

Highlighted values are below statutory

#### **Notes:**

1. For this report, beams and bays are numbered from the south consistent with the latest Routine Inspection Report.

**Figure 7.6B: Breakdown of Bridge Rating – Prestressed Beams (ASR/LFR)**

### **BREAKDOWN OF BRIDGE RATING**

TOWN/CITY: DANA-PRESCOTT

BRIDGE NO.: D-02-033=P-15-015

CARRIES: MAIN STREET

OVER: SWIFT RIVER

STRUCTURE NO.: D02033-BG1-DOT-NBI

BIN NO.: BG1

BRIDGE ELEMENT <sup>1</sup>		INVENTORY RATING BY ALLOWABLE STRESS METHOD (ENGLISH TONS)				OPERATING RATING BY ALLOWABLE STRESS METHOD (ENGLISH TONS)			
		H20	Type 3	Type 3S2	HS20	H20	Type 3	Type 3S2	HS20
EXTERIOR SIDEWALK BEAMS, NO.1 & 6	TOP & BOTTOM PLATE TRANSITION AT X = 23'-0"	20.2	21.7	26.0	22.4	43.4	46.8	56.0	48.3
	TOP & BOTTOM PLATE TRANSITION AT X = 23'-0" <sup>2</sup>	29.7	32.0	38.3	33.0	63.9	68.8	82.4	71.0
	FLEXURAL STRENGTH AT 0.5L	19.8	21.5	26.2	22.4	42.8	46.4	56.7	48.4
	FLEXURAL STRENGTH AT 0.5L <sup>2</sup>	29.1	31.6	38.5	32.9	62.9	68.2	83.3	71.2
1ST INTERIOR ROADWAY BEAMS, NO.2 & 5	TOP & BOTTOM PLATE TRANSITION AT X = 23'-0"	23.4	25.2	30.2	26.0	44.2	47.6	57.0	49.2
	TOP & BOTTOM PLATE TRANSITION AT X = 23'-0" <sup>2</sup>	36.0	38.8	46.4	40.0	68.1	73.3	87.8	75.6
	FLEXURAL STRENGTH AT 0.5L	26.3	31.5	49.6	34.9	42.6	51.2	80.4	56.6
	FLEXURAL STRENGTH AT 0.5L <sup>2</sup>	40.4	48.5	76.3	53.7	65.5	78.7	123.7	87.0
INTERIOR BEAMS, NO.3 & 4	TOP & BOTTOM PLATE TRANSITION AT X = 23'-0"	32.5	35.0	41.8	36.1	66.4	71.5	85.5	73.7
	FLEXURALSTRENGTH AT 0.5L	31.3	34.0	41.4	35.5	64.7	70.2	85.5	73.2

Shaded cells are controlling ratings

Highlighted values are below statutory

#### **Notes:**

1. For this report, beams and bays are numbered from the south consistent with the latest Routine Inspection Report.
2. Live Load application based upon AASHTO MBE 6B.6.2.2; live load distributed to exterior or 1<sup>st</sup> interior using lever rule and actual lane location.

**Figure 7.7: Breakdown of Bridge Rating – Alternative Rating Using Actual Lane Location**

### **DESCRIPTION OF BRIDGE**

<b><u>DANA-PRESCOTT</u></b>	<b><u>MAIN STREET / SWIFT RIVER</u></b>	<b><u>BRIDGE NO. D-02-033=P-15-015</u></b>
Date of Construction:	1952 (Original), 1974 (widening)	
Original Design Loading:	H15-44	
Posted Limit:	H20: 18 Tons, Type 3: 21 Tons, Type 3S2: 31 Tons	
Bridge Type:	2 simple spans of rolled steel beams with an 8" thick composite concrete deck	
Skew:	40°-16'-02"	
Spans:	Spans 1 & 2: 87'-5¼", center-to-center of bearings (per the plans)	
Width of Bridge Deck:	53'-0" out-to-out of deck slab (per the plans)	
Roadway Width:	40'-0" curb-to-curb (field verified 8/12/18)	
Roadway Surface:	3" bituminous concrete (field verified 8/12/18)	
Curbs:	Granite curb both sides with 7¾" average reveal (field verified 8/12/18)	
Sidewalk/Walkway/Median:	2 – 6'-6" sidewalks	
Bridge Railing:	Type H steel pedestrian rail and Type I protective screen along both sides of bridge	
Approach Railing:	W-beam highway guard at all four corners	
Superstructure:	Spans 1 & 2: 6 - 36WF245 and 2 – W36x260	
Modifications to Original Superstructure:	Safety curb removed and deck widened to add sidewalk and utility bay	
Utilities:	1–12" dia. cast iron water pipe, with 3" insulation, 1–10" dia. cast iron gas pipe in Bay 7	
Substructure:	2 cantilever reinforced concrete abutments, 1 reinforced concrete multi-column pier, reinforced concrete wingwalls at all four corners	
Modifications to Original Substructure:	Widened to accommodate superstructure	

**Figure 7.8: Description of Bridge**

### COMPARISON OF RATINGS

TOWN/CITY: DANA-PRESCOTT

BRIDGE NO.: D-02-033=P-15-015

CARRIES: MAIN STREET

OVER: SWIFT RIVER

STRUCTURE NO.: D02033-BG1-DOT-NB1

BIN NO.: BG1

Year of Report	1988	2018
Rating Engineer	Firm A	Firm B
Inventory RF	0.90 (HS20)	1.21 (HS20)
Controlling Element	S26 - Span 3 (Shear)	S26 - Span 3 (Shear)
Rating Software	Hand Calculations	AASHTOWare
Analysis Criteria		
$f_c$ (deck)	3 ksi	4 ksi
$F_y$ (steel stringer)	36 ksi	36 ksi
Notable Discrepancies	1. Steel deterioration at beam ends  2. Concrete deck based on MCEB date of construction	1. Rehabilitation project restored beam ends  2. Concrete strength based on review of MassDOT Standard Specifications for time of construction

**Figure 7.9: Comparison of Ratings**

**LOADINGS USED FOR BRIDGE RATING**


DANA-PRESCOTT

MAIN STREET / SWIFT RIVER

BRIDGE NO. D-02-033=P-15-015


**H20 VEHICLE**

TOTAL WEIGHT  
20 TONS




**TYPE 3 VEHICLE**

TOTAL WEIGHT  
25 TONS



**TYPE 3S2 VEHICLE**

TOTAL WEIGHT  
36 TONS

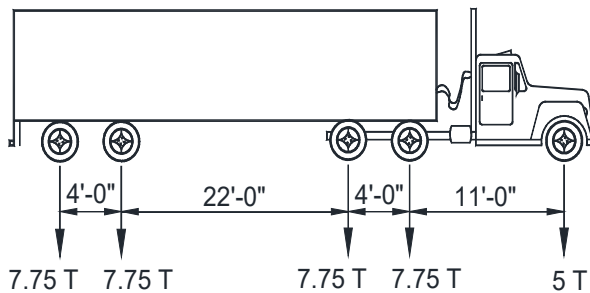

**Figure 7.10A: Vehicle Diagrams (LRFR)**

**LOADINGS USED FOR BRIDGE RATING**


DANA-PRESCOTT

MAIN STREET / SWIFT RIVER

BRIDGE NO. D-02-033=P-15-015


**H20 VEHICLE**

TOTAL WEIGHT  
20 TONS




**TYPE 3 VEHICLE**

TOTAL WEIGHT  
25 TONS




**TYPE 3S2 VEHICLE**

TOTAL WEIGHT  
36 TONS

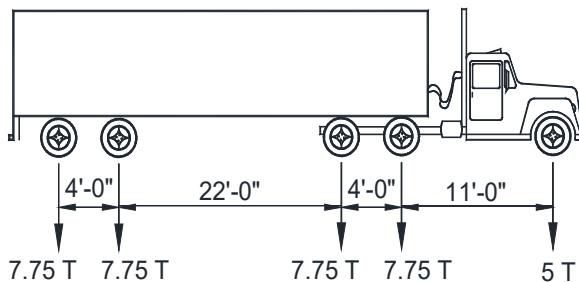

**HS20 VEHICLE**

TOTAL WEIGHT  
36 TONS

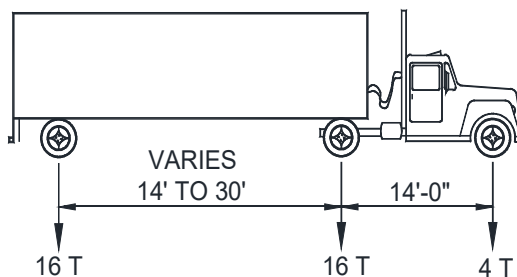

**Figure 7.10B: Vehicle Diagrams (ASR/LFR)**

**LOADINGS USED FOR BRIDGE RATING**


DANA-PRESCOTT

MAIN STREET / SWIFT RIVER

BRIDGE NO. D-02-033=P-15-015


**SU4 TRUCK**

TOTAL WEIGHT  
27 TONS

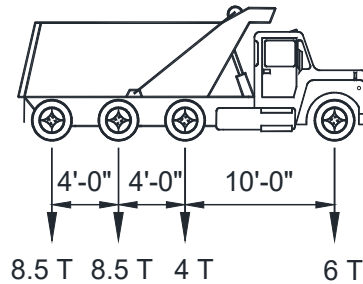


**SU5 TRUCK**

TOTAL WEIGHT  
31 TONS

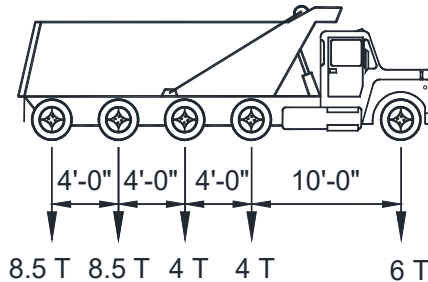


**SU6 TRUCK**

TOTAL WEIGHT  
34.75 TONS

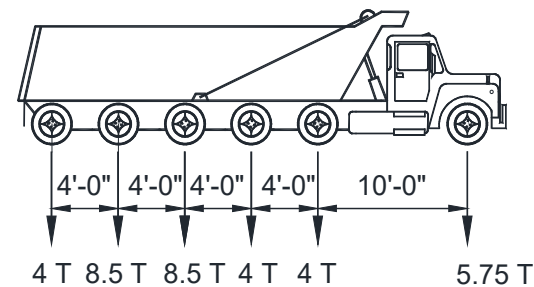

**SU7 TRUCK**

TOTAL WEIGHT  
38.75 TONS

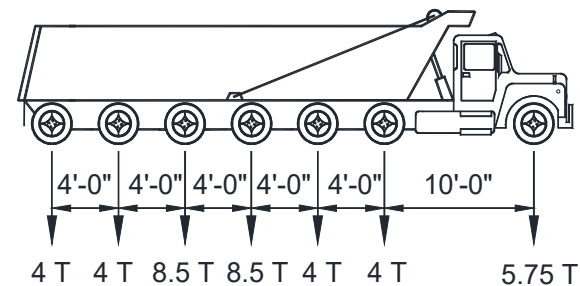

**Figure 7.11: Vehicle Diagrams – Specialized Hauling Vehicles**



**LOADINGS USED FOR BRIDGE RATING**


DANA-PRESCOTT

MAIN STREET / SWIFT RIVER

BRIDGE NO. D-02-033=P-15-015


**EV2 VEHICLE**

TOTAL WEIGHT  
28.75 TONS



**EV3 VEHICLE**

TOTAL WEIGHT  
43 TONS

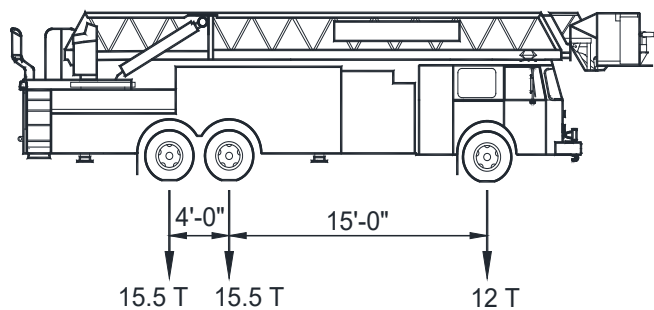

**Figure 7.12: Vehicle Diagrams – Emergency Vehicles**

## LOADINGS USED FOR BRIDGE RATING


DANA-PRESCOTT

MAIN STREET / SWIFT RIVER

BRIDGE NO. D-02-033=P-15-015


### HL-93 LOADING

Indicated Concentrations are Axle Loads in Kips

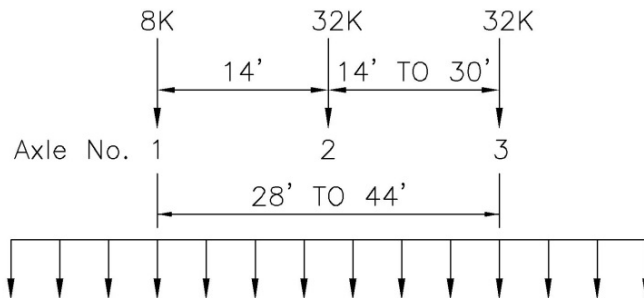

HL-93 Truck = 72 Kips (36 Tons)

HL-93 Lane Load = 0.64 klf

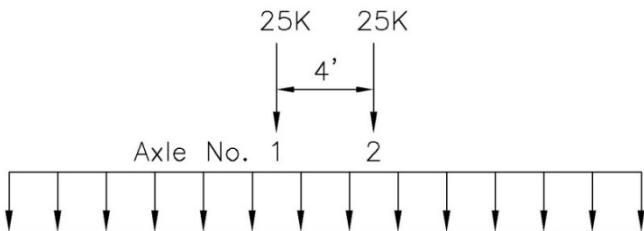

HL-93 Tandem = 50 Kips (25 tons)

HL-93 Lane Load = 0.64 klf

Additional Load Model for Negative Moment and Interior Reaction  
(Reduce all Loads to 90%)  
Design Lane Load = 0.64 klf

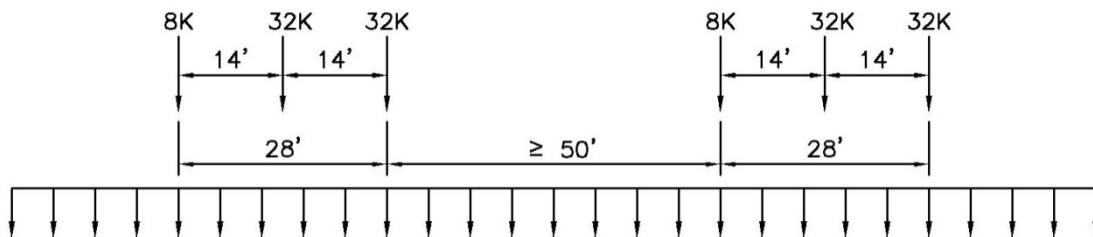


Figure 7.13A: Vehicle Diagrams – HL-93